

# hp·ux/usr

Hands-On Solutions for HP-UX Users • March 1995

**Anonymous  
FTP Access**



**Encina/9000 • Closing the Holes in HP-UX**  
**UNIX Boot Disasters: Planning Your Alternatives**


*A Publication of Interex • The International Association of Hewlett-Packard Computing Professionals*

BULK RATE  
US Postage  
**PAID**  
Send to: MS  
Permit #30



# Camintonn/Z-RAM Memory Customers Come Back Again And Again.

Memory products for:  
*digital*  
**HP Apollo**  
**IBM RISC**  
**Silicon Graphics**  
**SUN**  
**PCs and**  
**Laser Printers**

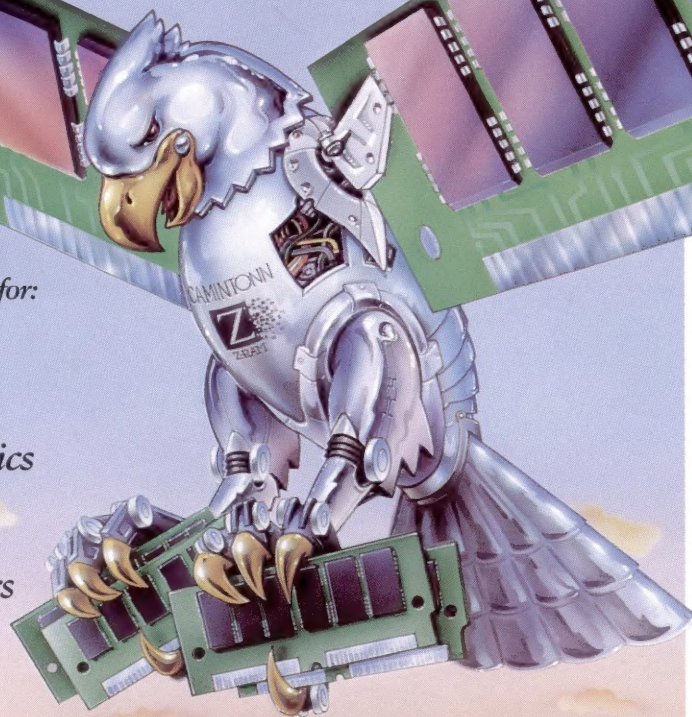

Why would you leave the nest if you're well taken care of? Camintonn/Z-RAM customers come back again and again because of our 12-year record of proven leadership. Not just in high quality products, but also in prompt customer service, knowledgeable technical support, and a 24-hour repair-or-replace guarantee. Backed by a lifetime warranty.

And since Camintonn/Z-RAM has the broadest line of memory products available, manufactured and rigorously tested in the

## Because We Take Care Of You.

United States, the quality product you need is ready for immediate delivery. What's more, we're almost always the first to offer 100% compatible memory for the newest systems – often before they're available from the original manufacturers.

Guaranteed performance and a 12-year track record of growth and financial stability. That's a message worth repeating. Call us at 1-800-368-4726 for an immediate quote for your system.

**CAMINTONN**  
CORPORATION

The last word in memory

Tel: 800/368-4726 or 714/454-1500

Fax: 714/830-4726

U.K. Tel: 44/865-784747 • Fax: 44/865-784750

See Us At Interex Booth 433



# FREE

**Camintonn/Z-RAM Atlas**  
**Your Guide To The**  
**World Of Memory**

Fax this form back to us and we'll send you the Z-RAM Atlas – a \$49.95 value!

Name \_\_\_\_\_  
Title \_\_\_\_\_  
Company \_\_\_\_\_  
City/State/Zip \_\_\_\_\_  
Phone \_\_\_\_\_ Fax \_\_\_\_\_

Which computer platforms are currently in use at your company? (check all that apply)

DEC \_\_\_\_\_ SGI \_\_\_\_\_  
HP \_\_\_\_\_ SUN \_\_\_\_\_  
IBM \_\_\_\_\_ PC LANs \_\_\_\_\_

Camintonn/Z-RAM world headquarters located at 22 Morgan, Irvine, CA 92718-2202. European headquarters located at Oxford Science Park, OX4 4GA, U.K. © 1994 Camintonn Corporation. Product and company names are trademarks or registered trademarks of their respective companies.

**CIRCLE 45 ON READER SERVICE CARD**



# HP Remarketing Specialists

Monterey Bay Communications is a vendor of remarketed Hewlett-Packard equipment. Since 1978, we have worked exclusively with HP products serving 1000 and 9000 users nationwide. Our goal is to provide these users with reliable used equipment that is functionally and cosmetically identical to what HP offers and at substantial savings. We do this within a sales environment that minimizes problems of shipping, configuration and installation.

## Consider the following:

- ▶ **Substantial savings on Hewlett-Packard computer systems and peripherals.**
- ▶ **All equipment guaranteed for Hewlett-Packard maintenance.**
- ▶ **An extensive parts and spares inventory assures prompt delivery — overnight if necessary.**
- ▶ **Knowledgeable service from a company that has been in business almost two decades.**

Our customers are our best reference and your best guarantee of satisfaction . . .


Aerogel Liquid	Cutter Labs	State Farm
Allied Signal	Harvard Observatory	Tandon Magnetics
Arco Chemical	Proctor and Gamble	3-Com Corp.
Arinc Research	Qume Corp.	TransAmerica Corp.
Bendix Eng.	Rockwell Int'l.	U.C.L.A.
Boeing	Smith-Kline	University of Iowa
Container Corp.	Spectra Physics	U.S.D.A.
Cummins NW	Stanford Labs	Warner-Lambert

We also purchase equipment . . .




### 1000 COMPUTERS

A990	2117B/F
A900	2113B/E
A600	2109B/E
A400	2100A/S
12025A/B	12979B/C



### 9000 COMPUTERS

750	710
735	705
730	400 SERIES
720	300 SERIES
715	200 SERIES




### MASS STORAGE

7906/20/25	C2212/13
7911/12/14	9122/23
7957/58/59/63	9133/53
7970/74/80	C1701A-M
C2200/02/03/04	DAT DRIVES
C3020/21/23/24	CD ROMS

### MONITORS

X-TERMINALS	35731A/41A
A1097A/C	2645/48
98751/52/54	2392/93/97
98785/89	700-92/94



### MEMORY AND INTERFACES

A SERIES
M E F SERIES
2100 SERIES
700, 400 SERIES
300, 200 SERIES

### PRINTERS

2225A/B/C/D	2934A
2631B	9876A
2635B	2563A
2932A	2564A/B

# MONTEREY BAY

C O M M U N I C A T I O N S

1010 Fair Avenue, Santa Cruz, CA 95060 Tel: 408-429-6144 Fax: 408-429-1918


CIRCLE 20 ON READER SERVICE CARD



JOHN CAMBRAY

Vice President of Product Development  
Davox Corporation

*"Our customers depend on our Intelligent Workstation Solution to keep their business going. We depend on DynaComm for the largest variety of terminal emulators and network connectors, full DDE capability and ease of use."*

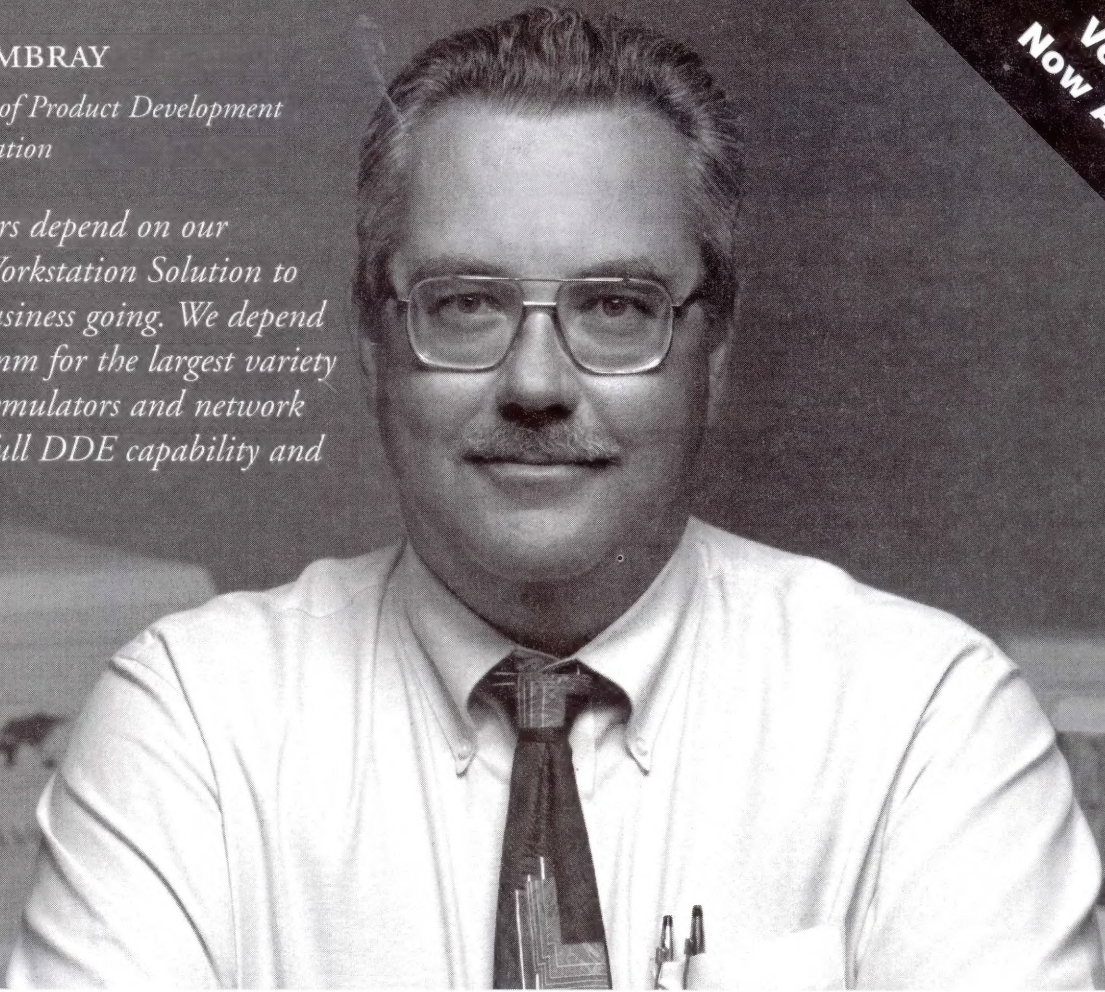

**Version 3.2  
Now Available!**

# DynaComm delivers for Davox.

Davox Corporation is a worldwide provider of unique, unified solutions for customer contact operations.

At FutureSoft, we know that PC connectivity has become a critical component in enterprise-wide computing. Our DynaComm product family provides extensive terminal emulation and network connectivity solutions for both asynchronous and IBM mainframe environments.

Take advantage of over a decade of experience and discover what Davox, Thoroughbred, Digital, Hewlett-Packard and numerous Fortune 500 companies already know.

Call for a free DynaComm demo disk.

**1-800-989-8908**

Our latest version has all the features that serious computing environments demand:

- ◆ Optional support for Microsoft's Visual Basic
- ◆ User desktop tools which are easy to configure and support
- ◆ Selective, DLL-based installation on your PC or server to minimize application footprint
- ◆ Graphical tools including dialog editor and keyboard mapper for easy interface customization
- ◆ Scripting capability to call external DLLs which is unequalled in the industry

**DynaComm**  
by  **FutureSoft**

*The Ultimate in Power and Flexibility*



# The Hewlett-Packard Computing Event of the Year!

**Metro Toronto Convention Centre  
Toronto, Ontario, Canada**

## **Interex '95** **Conference & Expo**


**14-18 AUGUST 1995**

### **New in 1995!**

In addition to Interex's solutions-oriented Conference & Expo focusing on "Building, Managing, and Using Key Technologies," Interex '95 will include a one-day Management Symposium (formerly Executive Interex).

Featuring Dr. James C. Wetherbe, the internationally known authority on the use of computers and information systems, the Symposium is designed to give you the information you need to strategically manage both technology and people in an increasingly complex global economy.

Also for the first time, Hewlett-Packard's 7th annual Manufacturing Productivity Users' Conference will run concurrently with the Interex Conference & Expo. This provides a unique opportunity for users to share experiences and meet HP professionals who are directly involved with developing and supporting MMII.

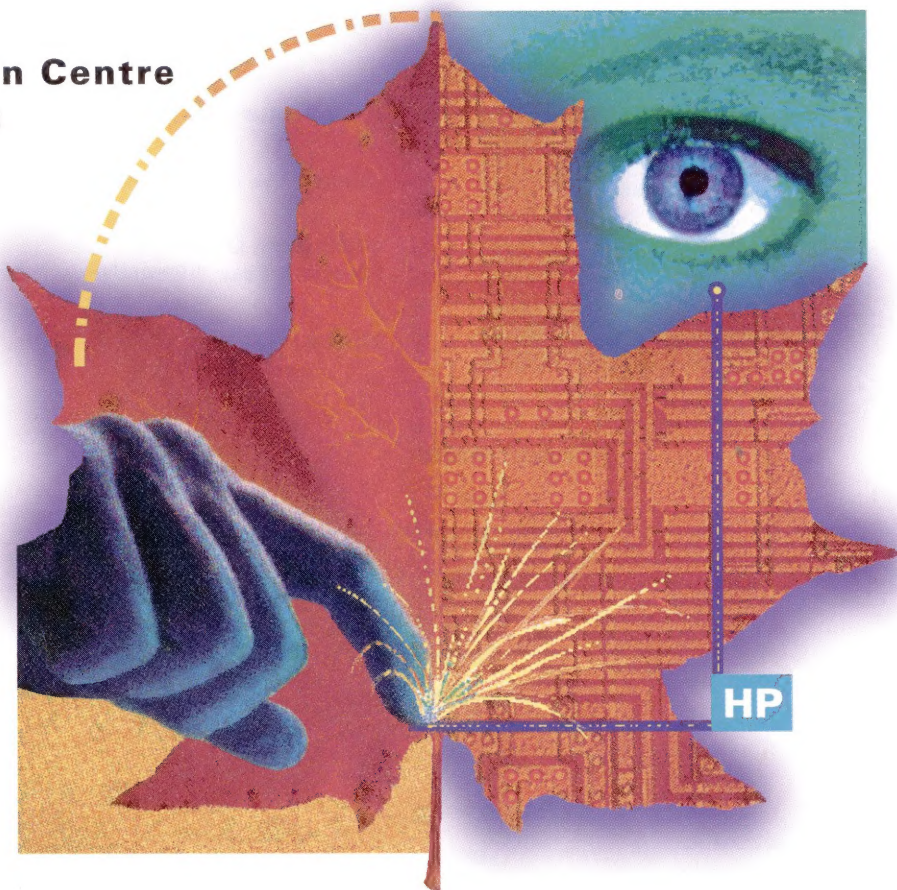

### **There's more!**

The program has been planned so that both Management Symposium and MMII attendees will also be able to attend the Interex '95 main conference sessions and events, as well as have access to the hundreds of exhibits at the Expo. To learn more about all of these extremely valuable events, call

# 800.990.EXPO



**interex**

*Shared Knowledge.  
Shared Power.*

Endorsed by  
 **HEWLETT  
PACKARD**



# Contents

## Features



page 34

- |  |                          |    |
|--|--------------------------|----|
| <b>Anonymous FTP Access</b>                                | <i>by Joe Berry</i>      | 24 |
| <b>Closing the Holes in HP-UX</b>                          | <i>by Joe Pennell</i>    | 34 |
| <b>UNIX Boot Disasters:<br/>Planning Your Alternatives</b> | <i>by Dennis McClure</i> | 44 |
| <b>Encina/9000</b>   | <i>by Paul Wang</i>      | 54 |

## Departments

- |                 |    |
|-----------------|----|
| Q & A           | 8  |
| HP 1000 Guru    | 22 |
| Industry Watch  | 72 |
| CSL Perspective | 74 |
| Product Focus   | 78 |
| New Products    | 80 |

## Columns

- |                              |                          |    |
|------------------------------|--------------------------|----|
| HP-UX Systems Administration | <i>by Chris Curtin</i>   | 60 |
| Internet Goodies             | <i>by Joe Berry</i>      | 64 |
| X-Watch                      | <i>by Larry Headlund</i> | 68 |

*New Products  
See page 80*



*Cover Story:  
See page 24*





# Lose your mouse and increase your productivity.

## *A Tired Hand Isn't A Productive Hand*

### Fingertip, Not Elbow

**Control** If you're using a mouse, you're asking for trouble. The motions required to operate a mouse have been shown to cause severe fatigue and repetitive motion injuries. Injuries that can slow you down, and inflict permanent damage to your hand. Even if the repetitive motions in mouse

#### INDUSTRIAL MODELS

HP/APOLLO	\$295
SUN Sparc	\$295
DEC	\$295
Silicon Graphics	\$295
NCD X-Terminal	\$295
RS/6000	\$295
PCserial	\$295
PS/2	\$295
Macintosh ADB	\$295

#### PROFESSIONAL MODELS

HP/APOLLO	\$199
SUN Sparc	\$199
DEC	\$199
Silicon Graphics	\$199
NCD X-Terminal	\$179
RS/6000	\$179
PCserial	\$179
PS/2	\$179
Macintosh ADB	\$179

usage haven't caused any injury in your case, they will definitely tire you out. That's why the MOUSE-TRAK® is designed to eliminate wasteful and tiring arm and wrist movements. The fingertip control of our

trackball and input keys, and our elevated hand support can reduce fatigue and the risk of repetitive motion injuries. So don't get caught in the RMI trap (*Call our 800 number or contact us via Internet, and we'll send you a complete analysis of repetitive motion syndrome and why MOUSE-TRAK is superior to mice.*)

### Industrial Model Available


Our *Industrial* model has the same ergonomic design as the *Professional*, with heavy-duty features like a super-strong Xenoy thermoplastic case, shielded cable, and greater moisture resistance.

### Lose Your Tiring Mouse and Increase Productivity

To order your MOUSE-TRAK in the U.S.A. call:

1-800-533-4822  
yvonne @ moustrak.com

**mouse-trak®**

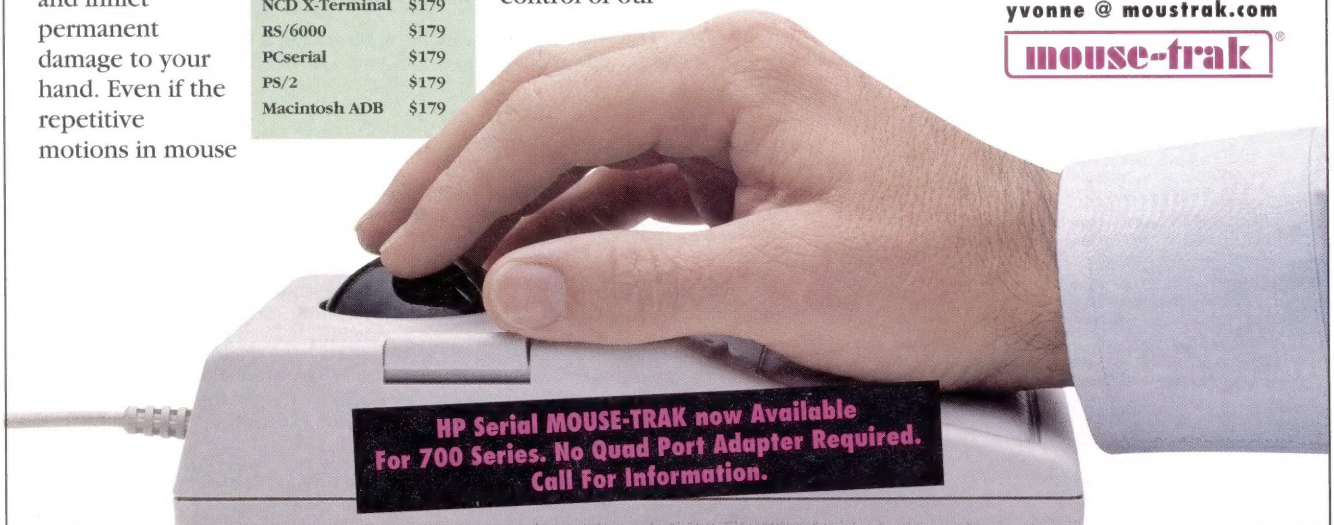

**HP Serial MOUSE-TRAK now Available  
For 700 Series. No Quad Port Adapter Required.  
Call For Information.**

**ORDER TOLL FREE 1-800-533-4822**

**International MOUSE-TRAK dealers:** NTWare Ltd. Pangbourne, Berkshire U.K. Tel: 0734 845792 • Skrivervik Data Oslo, Norway Tel: 47 2 18 58 00 • The Chameleon Group Dusseldorf 1, Germany Tel: 0211-379057 • Datacomp Dietikon, Switzerland 01 740 51 40 • SC METRIC A/S Skodsborgvej Naerum, Denmark Tel: 42 80 42 00 • Guillevin Mississauga, ONT Tel: 416 670 8433 • Hypec Electronics Ryde, Australia Tel: (02) 808 3666 • SPECMA Gothenburg, Sweden Tel: 031 89 16 00 • Aurora Systems, Inc. Seoul, Republic of Korea Tel: 718-4985 • PHASELYS Rosny Sous Bois, France Tel: 48.94.84.85 • Seg Tec Azur, Israel Tel: 972 3 556 7458 • MOUSE-TRAK is manufactured in the U.S.A. by ITAC Systems, Inc., 3113 Benton Street, Garland, Texas 75042 Fax: 214/494-4159 Patented by ITAC Systems, Inc. MOUSE-TRAK is a registered trademark of ITAC Systems, Inc. Other brand and product names are trademarks of their respective holders.

**CIRCLE 78 ON READER SERVICE CARD**



INTEREX EXECUTIVE DIRECTOR  
**Charles A. Piercey**

PUBLICATIONS MANAGER  
**Connie Wright**

**EDITORIAL**  
MANAGING EDITOR  
**Michael Ehrhardt**

COPY EDITOR  
**Richard Kranz**

NEW PRODUCTS EDITOR  
**Michelle Pollace**

PROOFREADER  
**Jean Nattkemper**

## ADVERTISING & MARKETING

ADVERTISING MANAGER  
**Brian Hallin**

ACCOUNT REPRESENTATIVE  
**Liana Fisher**

ADVERTISING COORDINATOR  
**Nader Saghafi**

MARKETING & COMMUNICATIONS  
MANAGER  
**Dee Ellsworth**

## DESIGN AND PRODUCTION

SENIOR GRAPHICS DESIGNER  
**Molly McGinnity**

DESKTOP PUBLISHING SPECIALIST  
**June Ramirez**

GRAPHICS PRODUCTION SPECIALIST  
**Gale Patterson**

*hp-ux/usr* is published bimonthly by Interex, the International Association of Hewlett-Packard Computing Professionals. Third-class postage paid at Sunnyvale, California 94086 and additional offices. The editorial and business offices are located at 1192 Borregas Ave., Sunnyvale, California 94089, USA, 408.747.0227, Fax 408.747.0947. Address membership questions and change of address to Membership Services. Address all questions concerning circulation/distribution to the Distribution Manager.

Remittances should be sent to Interex,  
File No. 61054, P. O. Box 60000,  
San Francisco, California 94160, USA.

Address all editorial correspondence to Michael Ehrhardt,  
Editor, *hp-ux/usr* Magazine, c/o Interex,  
P.O. Box 3439, Sunnyvale, California 94088-3439, USA.

Member Services (Site or General) include a  
subscription to *hp-ux/usr*. For other Member Services  
refer to membership form.

Statements of fact and opinion are the responsibility  
of the authors alone and do not imply an opinion on  
the part of the Interex Board or Magazine.  
Entire contents copyright © 1995 by Interex.  
All rights reserved.

POSTMASTER: Send address changes to:  
Interex, P.O. Box 3439,  
Sunnyvale, California 94088-3439 USA.  
Attention: Member Services.

TRADEMARKS: UNIX, UNIX System Laboratories, Inc.;  
HP-UX, Hewlett-Packard; X Window System,  
X Consortium, Inc.

Bulk rate U.S. postage paid  
Senatobia, MS. PERMIT # 30

## How to Contact Interex...

### EDITORIAL SUBMISSIONS

*hp-ux/usr* encourages readers to contribute their opinions, tips, and solutions. When sending letters for publication or to request author contribution guidelines, please address them to *hp-ux/usr* editor Michael Ehrhardt.

**Postal Address:**  
Interex  
P.O. Box 3439  
Sunnyvale, CA 94088-3439

**Office Address:**  
1192 Borregas Avenue  
Sunnyvale, CA 94089

Because of the difference in zip codes between our office address and P.O. Box, please be sure to address all regular mail to the P.O. Box. Any express service packages should be delivered to the Borregas Avenue address. Thank you for your attention to this small but significant detail.

### TELEPHONE:

The Interex switchboard is open 8:00 a.m.–5:00 p.m., Pacific Time. Call 800.468.3739 (U.S. and Canada) or 408.747.0227. After 5:30 p.m. our voicemail system will record your call.

### FACSIMILE:

Call 408.747.0947

### INTERNET:

To send e-mail to Interex, use the following address format:  
<IDname>@interex.org

The following IDs are currently active on Interex's HP 9000:

ID	Department
ehrhartd	<i>hp-ux/usr</i> Letters to the Editor, Q&A, and requests for author guidelines
postmaster	Internet support
cslhpx	Contributed Software Library
membership	Membership/subscription inquiries and services
pups	Circulation and advertising inquiries
conference	Conference questions and arrangements

An example would be [ehrhartd@interex.org](mailto:ehrhartd@interex.org)  
Anything before the @ sign is case insensitive.

### COMPUERVE:

Interex can be contacted via the CompuServe ↔ Internet gateway. To send CompuServe mail, use the following format:

>INTERNET: [ehrhartd@interex.org](mailto:ehrhartd@interex.org)

You can address your mail to specific departments using the ID's listed above.

Interex maintains a CompuServe account that is collected daily. Please address all messages to ID no. 76376, 1222.



*Shared Knowledge.*  
*Shared Power.*

As a not-for-profit association of HP computing professionals, Interex is dedicated to meeting the information, education, and advocacy needs of its members worldwide.

In today's world of rapidly changing technology, Interex puts hands-on solutions to hardware, software, and operating system problems at your fingertips. Because members actively contribute—exchanging ideas and sharing solutions—Interex is a vital link in the transfer of HP expertise.

Operating independently from Hewlett-Packard, Interex has more than 20 years of serving HP computing professionals. Through its publications, conferences, and volunteer committee structures, Interex has the qualifications to represent you, a valuable member of the HP user community.

Interex® is a trademark registered in the U.S. Patent and trademark office.



# Come Out of the Dark Ages

v 4.02  
Now  
Available



Protecting valuable information has always been an important job. Today however, as in times of old, this task has too often been accomplished using methods which are outdated and inadequate.

NetWorker for HP 9000 from INNOVUS provides a modern solution to an age old problem.




NetWorker is the industry standard backup and restore solution for UNIX networks. NetWorker combines flexibility, scalability and ease of use to provide a complete backup solution in an open client/server environment.

Supported platforms include NetWare, DOS, and most versions of UNIX. With NetWorker for HP 9000, data protection of legendary proportions can now be yours, today.

Contact an authorized reseller or INNOVUS at,  
Voice: (905) 529-8117,  
Fax: (905) 572-9586,  
E-Mail: [inforw@innovus.com](mailto:inforw@innovus.com).

Legato NetWorker is a registered trademark of Legato Systems, Inc. All other trademarks are property of their respective owners.

## INNOVUS Inc.







# Question & Answer

**Q:** I have users who don't handle their JetDirect printing very carefully and the printer ends up with a bunch of unprinted pages. Is there a way to kill a job or to restrict access?

**A:** Yes and Yes. The JetDirect software (current version C.02.17) has a command to kill the current connection, regardless of where it originated. To kill the connection, you must configure the printer with a SET community name (there is no default SET name). This is done when you first set up the printer for BOOTP... The options are in the SNMP section.

If you already specified some SNMP values, you don't need to remove and reenter the BOOTP setting; just edit the file `/usr/tftpdir/hpnp/<printer>.cfg` and add the line:

*set-community-name: whatever*

*whatever* is the password needed to do something to the JetDirect connection (such as kill it or force the card to reboot). Once this change is made, you'll have to power cycle the printer to force a reboot to download the new information. Once the connection is killed, you may need to remove the paper tray(s) to stop the printer from printing all the pages still left in memory. Then press the RESET button and hold it for 5 seconds until 07 RESET appears, or cycle power on the printer once the paper stops coming out.

To control access to the printer, the same file may be used to restrict access via TCP/IP connections. The entry in the `tftpdir/hpnp` file is:

*allow: 15.16.17.18 255.255.248.0*


The first number is the IP address of the computer allowed to send jobs to this printer, and the second (optional) is the subnet mask appropriate for this computer. Generally the second number is not required, but if supplied, it should be correct for that network.

The *allow:* command may be repeated up to 10 times for different hosts that are allowed access to this printer. Hosts that are not allowed access will have an error message listed in `/usr/spool/lp/log`.

**Q:** I have several system managers for my computer who occasionally change the kernel. Is there any method to determine if the currently running kernel in memory is based on the `/hp-ux` file on disk?

**A:** The command *ipcs* will use *nlist* to decode locations in memory given data that is contained in the `/hp-ux` file. If anything is changed in the `/hp-ux` file, the locations won't point to the right memory addresses and *ipcs* won't report anything.



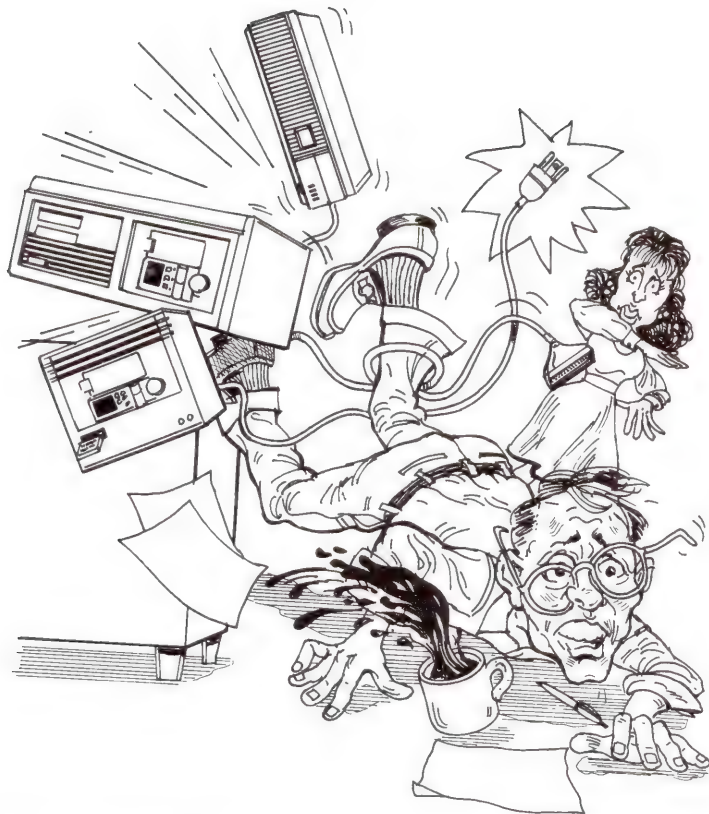

# It was UGLY.

*Joe bit it when he tripped over a mess of SCSI and power cables (12 stitches). Two days ago, he disconnected the server from the network (4 hours downtime). Last week, he was taking apart a tape drive he thought was bad when his screwdriver slipped and hit the power supply (fried drive, power out for two hours). Stacy tried to help him out and called the vendor to get a replacement for the fried drive, only to find out it would be two days before one could be shipped (2 days without backup).*

## Then came IEM Building Blocks.

**IEM's Building Blocks are a simple solution to your problem. Disk, tape and optical Building Blocks are the core of the Building Block product line. These are the best industry-standard devices encased in carriers with the SCSI and power cables built-in. Just slide Building Blocks into a variety of enclosures for unlimited combinations and configuration flexibility.**

**IEM offers a number of enclosure options.**

- 3-slot Horizontal Desktop Enclosure
- 7-slot Carrier with Pedestal Enclosure
- Medium & Large Cabinets  
(hold up to 24 7-slot carriers)

**Each enclosure is equipped with a pre-configured SCSI backplane, so all SCSI and power connections are made when a Building Block slides into place.**

*Since there are no loose cables to trip over, Joe listens to his Walkman and dances around the lab freely with no fear of stitches or disconnecting the network. If a device goes down, Joe just slides it out of its slot and replaces it with another. He has retired his screwdrivers to the toolbox -- far away from the lab.*

IEM specializes in HP-compatible solutions. For more information on IEM products, please contact us at one of the numbers below.




© 1995 Anis Inc. L1.0195

In the U.S. and Canada:  
IEM, Inc., P.O. Box 1889  
Fort Collins, CO 80522 USA  
Phone: (303) 221-3005  
(800) 321-4671  
Fax: (303) 221-1909  
E-Mail: [info@iem.com](mailto:info@iem.com)

In the United Kingdom:  
IEM, Inc., Colorado House,  
Cromwell Park, Banbury Road  
Chipping Norton, Oxfordshire  
OX7 5SR  
Phone: [44] 608 645000  
Fax: [44] 608 645155

All Others:  
IEM International Sales  
1629 Blue Spruce Drive  
Fort Collins, CO 80524 USA  
Phone: +[1] 303-221-3005  
Fax: +[1] 303-221-1909  
E-Mail: [info@iem.com](mailto:info@iem.com)

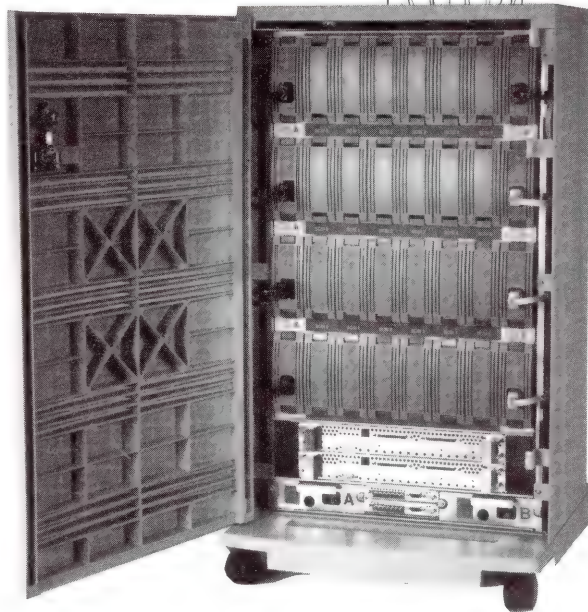

**CIRCLE 96 ON READER SERVICE CARD**



## Topics Coming in the May/June Issue of

# hp-ux/usr



Z-Mail

Building Applications

from the Internet

Networking Background

for System Administrators



## interex

Shared Knowledge.  
Shared Power.

Here's an example of a normal *ipcs* report:

```
IPC status from /dev/kmem as of Thu Jan 6 19:44:48 1995
T      ID      KEY      MODE      OWNER      GROUP
Message Queues:
q      0 0x3c441f85 -Rrw--w--w-    root      root
q      1 0x3e441f85 --rw-r--r--    root      root
Shared Memory:
m      0 0x41441f5b --rw-rw-rw-    root      root
m      1 0x41441fb5 --rw-rw-rw-    root      root
m      2 0x41442eb0 --rw-rw-rw-    root      root
m 14603 0x43740f0b --rw-rw-rw-    daemon    daemon
m 7204 0x00000000 D-rw-rw-rw-    daemon    daemon
m 25205 0x00000000 D-rw-rw-rw-    daemon    daemon
Semaphores:
s      0 0x41441fb5 --ra-ra-ra-    root      root
s      1 0x41442eb0 --ra-ra-ra-    root      root
s      2 0x00446f6d --ra-r--r--    root      root
s      3 0x01090522 --ra-r--r--    root      root
```

On a machine not running */hp-ux*, *ipcs* doesn't find valid data and only shows:

```
IPC status from /dev/kmem as of Thu Jan 6 19:44:48 1994
T      ID      KEY      MODE      OWNER      GROUP
Message Queues:
Shared Memory:
Semaphores:
```

To script this test:

```
ipcs | sed '/^[^msq]/d' | wc -l
```

which strips out all non-data lines (lines that don't start with m, s, or q) and simply counts if any lines are present. *ipcs()* also allows you to specify another *nlist()* file, so

```
ipcs -N /SYSBCKUP | sed '/^[^msq]/d' | wc -l
```

will try to match data using the symbol table from */SYSBCKUP* instead of from */hp-ux*.

**Q:** Sometimes I've had problems with booting up on my Series 800 computer with errors like:

```
disk1(4.0.0;0x4) bad magic; ERRNO=16
```



What happened and how do I fix it?

**A:** This means that the *AUTO* file tried to load */hp-ux* from section 0x4. If you are using disk sections (not LVM) to boot, you need to specify the correct disk section as in:

```
ISL > hpux disc1(4.0.0;13)
```

To see what the current *AUTO* file contains, use the ISL command: *lsa* (or the long form: *listautofl*) and it will report what the *AUTO* file contains. You can fix the command very easily with:

```
ISL > hpux set autofile (;6) "hpux (;13)"
```

The (;6) refers to section 6 where the LIF area (and the *AUTO* file) is contained. The text in quote marks is the desired *AUTO* file contents. The man page *hpux\_800* has details on these commands.

**Q:** I need a way to test whether or not a variable in a script is set. I've tried a few things but I want to make sure that the variable actually contains something other than null or spaces.

**A:** At first appearance, something like:

```
set +u
if [ -z "$myvar" ]; then ...stuff... fi
```

The *-z* test will be true if *myvar* is not set or if *\$myvar* is null (no value). However, if *\$myvar* is whitespace, *-z* will be false.

Another method of performing string tests with *ksh* is to use double square brackets. Using this method you don't need the " " around *\$myvar*. The question about how to catch null strings or whitespace should work with a test of a pattern that matches zero or more occurrences of whitespace.

```
if [[ $myvar = *([ ]) ]]
then
    print TRUE
else
```

```
    print FALSE
fi
```

Note that the [ ] is actually: square bracket, space tab, square bracket. Now the routine will return TRUE if:

```
myvar is undefined
myvar is a NULL string
myvar is a string with only blanks or tabs or any combination
```

**Q:** How do I compute the *dump(1)* command tape lengths for DDS drives?

**A:** *dump(1)* was written a long time ago and only for 1/2-inch magtapes that had standard recording densities and inter-record gaps. Today's DDS drives have much more sophisticated data handling and recording techniques and *dump* cannot be rewritten to handle these features without sacrificing compatibility. However, you can assume a record length of 16k and approximately 500kbytes/inch recording density. So for 60-meter tapes (which is about 200 ft), use:

```
dump bds 16 500000 200
```

or for 90 meter tapes (300 ft),

```
dump bds 16 500000 300
```

Data compression is almost impossible to predict until after the data has been written, but you can start with 2:1 as a common compression value.

With *dump(1)*, you will not have access to high-speed retrieval methods for DDS tapes such as those found in *frecover* and HP's *OmniBack* software.

**Q:** I need a list of alternate superblocks, but I did not save them when I ran *newfs*. How can I regenerate them?

**A:** The algorithm that *mkfs* (or *newfs*) uses is described in



the header file `/usr/include/sys/fs.h`:

```
( fpg * c ) + ( cgoffset * ( c & ~cgmask )) + sblkno
```

where

`c` = the cylinder group number  
`fpg` = fragments per cylinder group  
 $( \text{nsect} * \text{ntrak} * \text{cpg} ) / ( \text{frag\_size} / 1\text{K} )$   
`nsect` and `ntrak` can usually be found in the `/etc/disktab` entry  
`cpg` defaults to 16  
`cgoffset` = cylinder group offset, `nsect` is rounded to the next higher  
multiple of the block size in KB / fragment size in Kb  
`cgmask` = a binary mask value with the high order bits set and the low  
order bits clear such that value of `ntrak` will be masked  
`sblkno` = 16 (unless you have the block size set to some other size...use  
that block size)

**Q:** Is there a way to check for the presence of a tape in my drive?

**A:** Here's a quick way:

```
mt -t /dev/rmt/0m rew
if [ $? -ne 0 ]
then
    echo " No tape present"
else
    echo "Tape is ready"
fi
```

If you want to unload the current tape, use `mt -t /dev/rmt/0m off line`. This works on SCSI tape drives but not on HP-IB drives, which do not have a media unload capability through the computer.

**Q:** I need to run a very large program that may require 1500 megabytes in the data area. How can I do this on my 700 workstation?

**A:** By default, a process's 4-GB address space is divided into four equal quadrants of 1 gigabyte each. Each quadrant has a specific purpose (text, data, etc.) and this

accounts for the limitation on `maxdsiz` of ~960 megabytes.

The manual *How HP-UX Works: Concepts for the System Administrator* (Manual Part No. B2355-90029) gives a picture of what the process address space will look like.

Beginning with HP-UX Release 9.01, the Series 700 workstations allow you to define an `EXEC_MAGIC` executable whose maximum data size can exceed one gigabyte. The *Concepts* manual explains this as follows :

On the Series 700, an `EXEC_MAGIC` user executable (`a.out`) format allows data to start immediately after the code area in the first quadrant, instead of at the beginning of the second quadrant, and grow to the beginning of the user stack. Executables created with this format can handle more than 1 GB of data; refer to `ld(1)` in the *HP-UX Reference Manual* for information.

A process's address space in `EXEC_MAGIC` format is depicted in *Figure 1*. Notice the key is that our data space now starts in the first quadrant right after the process text and runs through the second quadrant. The data space cannot take the full two gigabytes but rather about 1.9 gigabytes. The ~1.9-GB limit represents the area from `0x00000000` to `0x7b033000`. As you see, the remainder is used for the stacks and U-Area.

Again this is done only for `EXEC_MAGIC` executables. For `SHARED_MAGIC`, the data will begin at `0x40000000`. Everything else will remain at the same location and the maximum stack size is still 80 MB. To

*Continued on Page 14*



# HOW CAN YOU PREVENT ORACLE PERFORMANCE PROBLEMS BEFORE THEY IMPACT USERS' PRODUCTIVITY?

## PLATINUM *DBVision*

**PLATINUM DBVision™** optimizes ORACLE performance and reliability with continuous, high-efficiency monitoring of thousands of critical ORACLE resources—right down to the process, user, database object, and SQL statement level—24 hours a day, 7 days a week, automatically.

### PROBLEM PREVENTION


DB-Alert notifies you with an audible alarm

ORACLE is running. Multiple networked instances are monitored through a single display; you can change the display of instances or performance measures with a simple point and click.

### AUTOMATED STORAGE MANAGEMENT

PLATINUM DBVision gives you storage management capabilities for both

THE ULTIMATE  
PERFORMANCE MANAGER  
FOR ORACLE

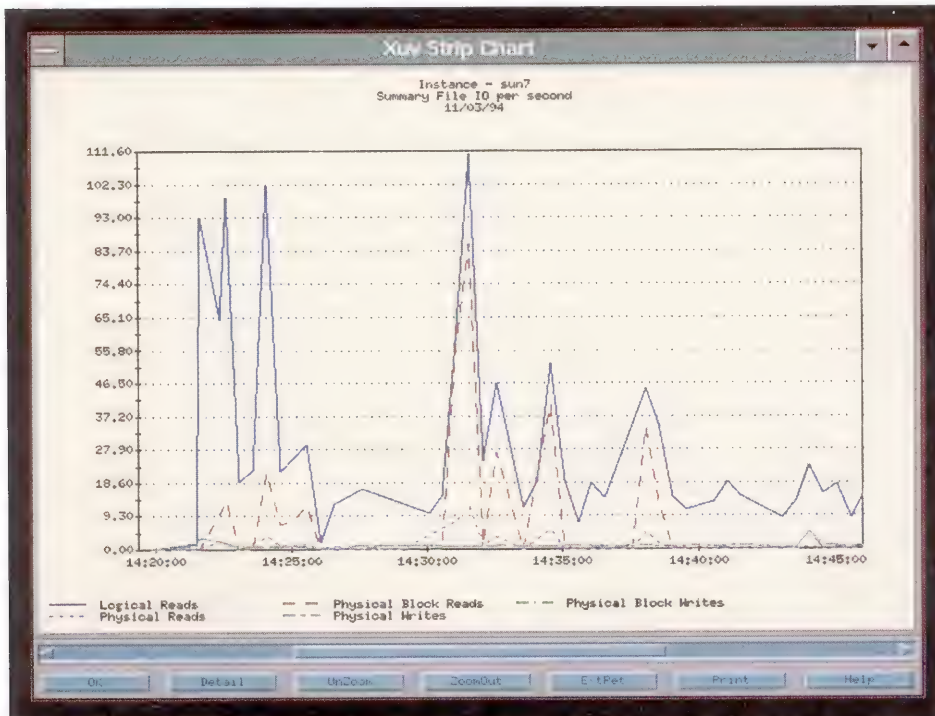

on the visual display, an E-mail message, or a pager alert of problems or exceptions before users are affected. You decide how to respond and when. You configure the thresholds and limits used by the system to detect problems automatically and initiate specified actions.

### CROSS PLATFORM SUPPORT

PLATINUM DBVision is the only product that fully supports heterogeneous environments that have thousands of remote ORACLE instances—regardless of the processors and operating systems on which

ORACLE tablespaces and server file systems. Free space and fragmentation are tracked over time so that shortages can be easily anticipated and prevented. Routine storage management tasks are readily automated.

### FRIENDLY INTERFACE

DBVision's interface uses graphic objects to represent ORACLE performance measures. This custom panel is an open window that shows you the system status of your networked ORACLE environment at a glance.

COMPLETE SYSTEM HISTORY  
Reports database and server  
performance in real time  
and historically—at both system  
and user levels—through:

- Bar Graphs
- Strip Charts
- Tabular Displays


# PLATINUM TECHNOLOGY

TO ORDER CALL  
**1.800.401.7528**

PLATINUM technology, inc.,  
1815 South Meyers Road,  
Oakbrook Terrace, Illinois 60181  
Phone 708.620.5000 Fax 708.691.0718

PLATINUM technology, inc., is a member of Oracle Corporation's Systems Management Tools Initiative. PLATINUM DBVision developed by the Aston Brooke Development Laboratory of PLATINUM technology, inc. All companies and product names mentioned are trademarks or registered trademarks of the respective owners. ©1995 PLATINUM technology, inc.

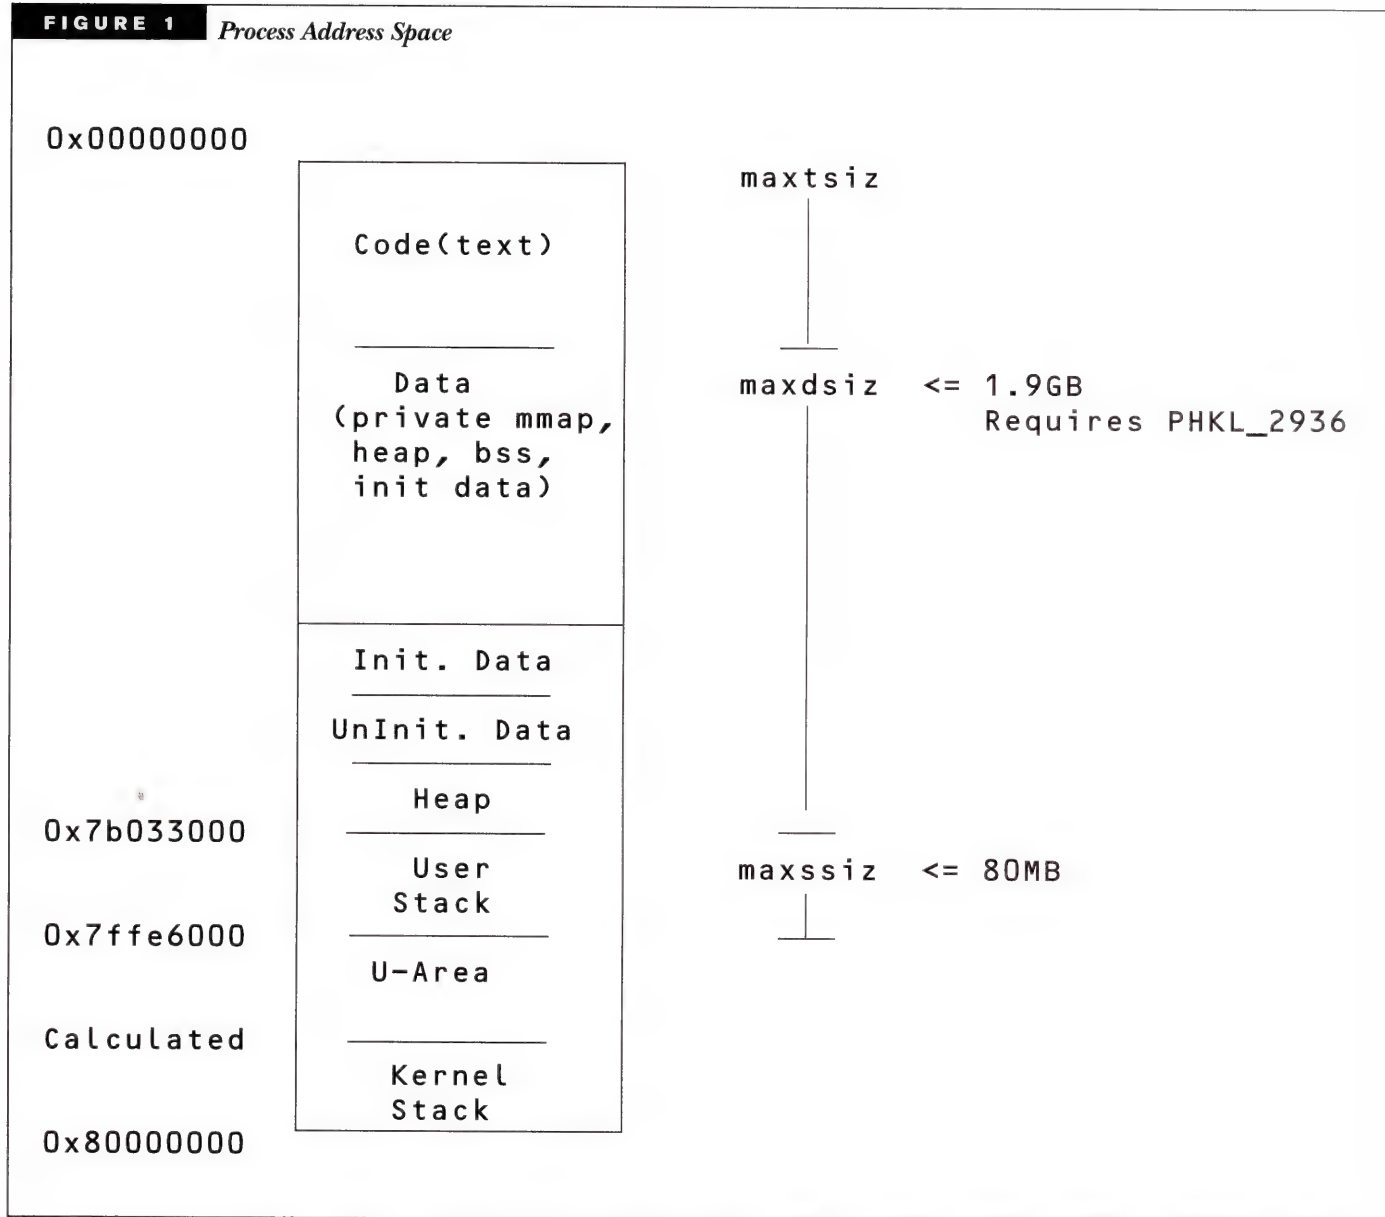

**FIGURE 1** *Process Address Space*

create an executable in EXEC\_MAGIC format requires that it be linked with the -N option. Refer to the *ld(1)* man page for more details. Also, a patch is required on 9.01 to remove a restriction on maxdsiz that still limits the data to ~960 MB.

There is a negative impact from the use of EXEC\_MAGIC. Since the text and data share the first and second quadrants, and data must be private, both quadrants now have to be marked private. This means that the program's text is no longer sharable. Each process will have its own copy of the text loaded. It would

not be desirable to create a large number of such unshared executables because they place a huge demand on memory.

If you have an existing program that you have no source for or do not wish to recompile/link as EXEC\_MAGIC, the process will remain with a limit of ~960 MB for its data size.

*General HP-UX and 9000 questions are answered by Bill Hassell, a support engineer at the HP Atlanta Response Center. He can be contacted via e-mail at blh@hpuaerca.atl.hp.com.*

*Continued on Page 16*



# MDL Corporation does it again!

HP9000/7XX Driver for the Seagate Elite 9GB disk drive

Other products  
manufactured  
by **MDL**  
include

**FAWS**  
Fast and Wide  
SCSI controller

**FANS**  
Fast and  
Narrow  
SCSI controller



**EISA BUS**  
Expansion Box

Full function  
Exabyte drivers  
for the HP-UX  
and Domain  
operating  
systems

Performance  
tuned drives

Now thanks to **MDL** you can run the **Seagate Elite 9®**, 5.25" 9GB formatted Fast SCSI 2 drives on your **HP System**. Think of the possibilities with a complete 9GB subsystem, drivers, tested and custom configured for optimal performance.

**Call MDL at (800) 800-3766**

 **Seagate**

Seagate and Elite are registered trademarks of Seagate Technology, Inc.

**Fax (206) 861-6767 Call TODAY**



## Workstations

**Q:** I am using HP FAX 9000 on my 9000 Series 715 workstation. The 715 is a stand-alone FAX 9000 server. I have several users who log in remotely and use the HP FAX 9000 through the command line interface. I would like to know how to turn off e-mail confirmation for those FAX 9000 users who do not want e-mail confirmation that the fax was sent and who do not have access to the FAX 9000 GUI.

**A:** In their home directories have the users edit their `$HOME/.faxrc` file and change the `fax.sendConf` line to read as follows:

```
fax.sendConf: False
```

**Q:** I have an HP 9000 Series 712/80 workstation running HP-UX 9.03. The HP 712/80 comes equipped with audio. I am using an executable in the `/usr/audio/bin` directory called `send_sound` and would like to know how to direct the audio sound from the internal speaker to the external jacks on the rear of the machine where I have installed external speakers.

**A:** To redirect the audio output from the internal speakers to the external ports on your 712 you will need to set the `SPEAKER` environment variable as follows:

Bourne Shell & Korn Shell

```
export SPEAKER=external
```

C Shell

```
setenv SPEAKER external
```

This information is covered in the *Audio(5)* man page.

**Q:** Is there a way to edit faxed images that my HP fax solution receives? I run HP MPOWER 2.02 on an HP 9000

Series 735 running HP-UX 9.05. MPOWER uses the HP FAX 9000 as the fax facility. I need to be able to edit forms that are faxed to me and then fax the edited forms back to the person who sent them. Is this possible through HP MPOWER and FAX 9000?

**A:** Yes; to edit a fax image received through FAX 9000, bring up the fax in question through the FAX 9000 browser window. Highlight the desired fax and press the **View Fax...** button. This will bring up the fax viewer window. From the **Fax - View** window select the **Add Text** button and this will bring up the **Add Text** window. Enter the desired changes in this window and select the **Place Text** button and move the mouse pointer to the location on the form you would like the text placed.

**Q:** I run VEETEST Version B.00.01 on an HP 9000 Series 735 running HP-UX 9.03. I am having problems accessing the serial interfaces on the 735 from HP VEETEST. I am using Direct I/O objects and I have verified the baud rate setting and other configuration criteria are correct for my serial device. I set the Direct I/O object through the **I/O -> Configure I/O** menu pick in the VEETEST window. When I try using the Direct I/O object, I get an error pop-up that complains that it cannot find serial9. Have I missed a configuration point?

**A:** Yes, I believe that your system is not configured correctly. HP VEETEST B.00.01 on the Series 700 machines uses `termio(7)`, as one might expect, to control the serial interface. However, VEETEST configures the port through the SICL (Standard Instrument Control Library) `/usr/pil/etc/hwconfig.cf` file. The last entries in the `hwconfig.cf` should reference the serial interfaces. *Figure 2* shows a `hwconfig.cf` file with the serial9 configuration line uncommented.

Notice the second line from the bottom of the file that references `# RS-232 'A' Port (on s700's)`. After uncommenting the line that references the serial port, run the command `/usr/pil/bin/pilconf`. This will make a `/dev/serial9` device file and correctly configure VEETEST to use port A on your 735. A word of WARNING: `pilconf` will build a new kernel and reboot your system.

*Continued on Page 20*



**FIGURE 2** *hwconfig.cf File*

```
#
# Hardware Configuration File
#
#
# Each line in this file corresponds to an interface card that will be used
# by the PIL kernel driver for instrument I/O. There is one and only one
# line per interface card.

# The format of each line is as follows:
#
#   <lu> <symname> <cardname> <location> <card_addr> ...card specific values...
#
#
# Where:
#   <lu>          - Logical unit number of the card (0<lu<10000). Each
#                  interface card must have a unique logical unit number.
#                  The actual value used is not important, but you must
#                  remember this number in order to properly address the
#                  card in your application.
#   <symname>      - A symbolic name for your card. Each card must have
#                  a unique symbolic name. This name may be used instead
#                  of the logical unit number to address an interface. The
#                  default symbolic name for your first HP-IB card should
#                  be "hplib". Possible values for additional HP-IB cards
#                  include (but aren't limited to): "hplib2", "xhplib", etc.
#   <location>     - The location of the card. For EISA/ISA cards, this is
#                  the slot number. For DIO cards, it is the select code.
#                  For s700 internal cards, this field should always be
#                  0 (not used).
#   <cardaddr>     - For HPIB, this is the bus address of this card. For
#                  VXI, this is the logical address of this card. For
#                  RS-232, this field should always be 0 (not used).
#
# card specific information is described below for each possible card.
# In each case, the values specified are numbers and may be represented
# in either hexadecimal (using 0x...), octal (using 0...), binary
# (using 0b...), or decimal (default).
```



**FIGURE 2** *hwconfig.cf File, continued*

```

#
#
# Cards located on this system:
#
#
# HP E2070A Card (ISA HP-IB Interface Card):
#     <lu> <symname> e2070a <slot_num> <hpib_busaddr> <dip_switch>
#     where:
#         <slot_num>      - EISA/ISA slot number.
#         <hpib_busaddr> - HP-IB Bus address of this card.
#         <dip_switch>    - The value of the DIP switch setting for this E2070A
#                           interface card. See the installation manual for
#                           information on how to code this value.
# Default HP-IB Card
7     hpib e2070a 1 21 0b01110000 1 # Card in first slot (Slot #1)
# Uncomment the following lines for the 2nd thru 4th card:
# Note that only slots (1,3) or (1,4) or (2,4) are allowed combinations,
# since two HP-IB cards cannot sit in two consecutive slots (mechanical
# mounting won't work).
#7     hpib e2070a 2 21 0b01100100 1 # Card in second slot (Slot #2)
#8     hpib2 e2070a 3 21 0b01011000 1 # Card in third slot (Slot #3)
#8     hpib2 e2070a 4 21 0b01001100 1 # Card in fourth slot (Slot #4)
#
# HP s700 Internal RS-232 cards
#     <lu> <symname> int232 0 0 <port_number>
#     where:
#         <port_number> - Either 1 (for the RS-232 'A' port) or 2 (for the
#                           RS-232 'B' port).
#         0 0           - Required.
#
9     serial int232 0 0 1      # RS-232 'A' Port (on s700's).
#10    serial2 int232 0 0 2     # RS-232 'B' Port (on s700's).

```





## International HP Workstation Users Group Conference Phoenix, Arizona — May 7–10, 1995

This conference promises to be the most extensive technical conference for HP workstation system users. It's your opportunity to learn what's new in HP workstation hardware, software, and state-of-the-art technology. Also, it's your chance to share and learn from the knowledge within the InterWorks user community.

So, if you work primarily with HP 9000 workstations, come reap the benefits of InterWorks '95.

### Conference Highlights:

- Pre- and Post-Conference Educational Training Seminars
- Tutorials presented by HP engineering teams and professionals in the user community
- Keynote presentations by Bernard Guidon, General Manager, and Karl Freund, Marketing Manager, of HP's Workstation Systems Division and Steve Legensky, Founder and Principal of Intelligent Light
- Technical Lab, which contains HP workstation products for hands-on, practical applications, and discussions with HP technical engineering specialists
- Vendor arcade, featuring the latest applications on HP workstations

For further information on the conference and membership, call Cyndi Charest at 508/436-4460 or email [charest@apollo.hp.com](mailto:charest@apollo.hp.com)



There is one other possibility that could cause your problem. If you have installed a newer version of the SICL libraries, the *hwconfig* file may not contain the correct entries for VEETEST B.00.01. SICL 3.X and above reference the serial ports in a different fashion. This newer method allows control of the interfaces directly through SICL instead of *termio(7)*. Future releases of VEETEST will use this method to control the serial interfaces, but the B.00.01 release and below use the *termio(7)* function. Shown below is an example of the new *hwconfig.cf* serial entries:

```
#
# The serial drivers specify the following defaults:
# baud: 300 1200 2400 4800 9600 19200
# parity: NONE 0x00
#         ODD 0x08
#         EVEN 0x18
#         ZERO 0x38
#         ONE 0x28
# cbits: 7 0x02
#         8 0x03
# sbits: 1 0x00
#         2 0x04
# flow: NONE 0x00
#        XON_XOFF 0x01
#        RTS_CTS 0x02
#        DTR_DSR 0x03
# SRQ: RI 0x00
#        DSR 0x01
#
# Example:
# 9 serial serial700 0xf0823000 26 <baud> <parity> <cbits>
#                                     <sbits> <flow> <SRQ>
#
# 9 COM1 serial700 0xf0823000 26 9600 0x00 0x03 0x00 0x00 0x00
# 10 COM2 serial700 0xf0822000 25 9600 0x00 0x03 0x00 0x00 0x00
```

When the 9 COM1 line is uncommented in the example above, the interface is lost to the operating system as a *termio(7)* resource and dedicated to the SICL library. To get around this, simply ensure the newer references to the serial lines are commented out and add a line to reference the interface as in the older example as follows:

```
9      serial int232 0 0 1      # RS-232 'A' Port (on s700's).
```

**Q:** I just bought a new HP 9000 Series 745i and BASIC/UX 7.01. I have had a HP 9000 Series 382 running BASIC/UX 6.3 for some time now. My problem is that

when I moved the BASIC/UX code from the 382 to the 745i the program runs about three times slower on the 745i. I have looked through the manuals to see if I have something configured wrong, but cannot find any reason for the slower operation. Should the 745i run the BASIC/UX code slower?

**A:** No; however, we have recently seen problems with BASIC/UX 7.01 on Series 700 machines where a program that uses I/O will execute much slower than normal. This has been traced to the use of shared libraries with SICL and BASIC/UX. The reason is a permissions problem with the shared libraries supplied with SICL and BASIC/UX 7.01. The libraries were shipped with write permission set, which causes the libraries to be rechecked by the operating system each time they are accessed by the program. This extra checking to ensure the libraries have not changed is causing slower program execution. To correct this behavior you will need to change the permission to 555 on all the SICL libraries. You will need to do this to */usr/lib/libsicl.sl* and all the *.sl* files in the */usr/pil/lib* directory. ■

---

*HP 9000 workstation questions are answered by Rudy Stanley, an applications support engineer with the Hewlett-Packard Response Center in Atlanta, Georgia. He can be reached at [brst@hpuerca.atl.hp.com](mailto:brst@hpuerca.atl.hp.com).*

## Join SIGUNIX via e-mail!

HP-UX server and workstation users can now join SIGUNIX, the Interex Special Interest Group (SIG) for UNIX users via e-mail.

To subscribe, send a message to {listman@interex.org}. The message should state "sub sigunix firstname lastname."

Once on the list, you'll be included on SIGUNIX communications and you'll be able to send messages to other SIGUNIX members using the {sigunix@interex.org} address.

interex

The International Association  
of Hewlett-Packard  
Computing Professionals

# BUY • SELL • REPAIR

# HP 9000

## PARTS • HP 3000 • UPGRADES • CPU'S

# 1-800-842-4781

## Workstations INTERNATIONAL

**NEW AND REFURBISHED**

**Seagate, Kingston & Exabyte**

**Rentals available**

601 Lakeshore Parkway, Suite 1160  
Minnetonka, MN 55305  
PH: (612) 449-9000  
FAX: (612) 449-3198

CIRCLE 39 ON READER SERVICE CARD

## Client/Server Makeover in Minutes!

Reflection 1-EMPLOY.R1W  
File Edit Terminal Connection Options Window Help  
\*\*\* EMPLOYEE MASTER ENTRY & MAINT. \*\*\* Empl No: 01493 FUNCTION: INQUIRE  
Name: Frederick P. Garvin Address: 1212 San White Blvd.  
City: Austin State: TX Zip: 78749 SS Number: 212 44 1599  
Phone Number: 512 280 4391 Title: Manager  
Pay Rate: 00 Tax State: 44  
Date Hired(MDY): 01 26 90 Marital Status: Married Birthdate(MDY): 11 14 40  
Rate Change(MDY): 02 28 94 Vacation Date(MDY):  
Sick Days: Hours: Vacation Days: Hours:  
Dep Fed: 02 Dep State: 02 Excess Tax P/A: 00 Demo Amt: 00 Cefeteria Plan: 0  
Deferred Comp %:  
Pay Period: 3 = Semi-Monthly  
Employee Master Screen  
File Edit Mode Help  
\*\*\* EMPLOYEE MASTER ENTRY & MAINT. \*\*\* Empl No: 01493 FUNCTION: INQUIRE  
Name: Frederick P. Garvin Address: 1212 San White Blvd.  
City: Austin State: TX Zip: 78749 SS Number: 212 44 1599  
Phone Number: 512 280 4391 Title: Manager  
Pay Rate: 00 Tax State: 44  
Date Hired(MDY): 01 26 90 Marital Status: Married Birthdate(MDY): 11 14 40  
Rate Change(MDY): 02 28 94 Vacation Date(MDY):  
Sick Days: Hours: Vacation Days: Hours:  
Dep Fed: 02 Dep State: 02 Excess Tax %: Amount: 00 Cefeteria Plan: 0  
Deferred Comp %: 0000 Demo Amount: 00 Selected: 0  
Pay Period: 3 = Semi-Monthly  
Deductions  
Ins. Amt: 240.00 Dental Amt: .00 Retire Amt: 925.00  
Dept Wage: Amount: 10 50 1500.00 10 60 1500.00 10 99 1000.00  
Total Salary: 4000.00  
CONTINUE ENTER KEY  
PRESS CONTINUE TO CLEAR SCREEN AND CONTINUE

9:30 a.m.

Employee Master Maintenance  
File Edit Mode Help  
Employee No: 01493 FUNCTION: INQUIRE  
Name: Frederick P. Garvin Address: 1212 San White Blvd.  
City: Austin State: TX Zip: 78749 SS Number: 212 44 1599  
Phone Number: 512 280 4391 Job Title: Manager  
Pay Rate: 00 Tax State: 44  
Date Hired(MDY): 01 26 90 Marital Status: Married Birthdate(MDY): 11 14 40  
Rate Change(MDY): 02 28 94 Vacation Date(MDY):  
Sick Days: Hours: Vacation Days: Hours:  
Dep Fed: 02 Dep State: 02 Excess Tax %: Amount: 00 Cefeteria Plan: 0  
Deferred Comp %: 0000 Demo Amount: 00 Selected: 0  
Pay Period: 3 = Semi-Monthly  
Deductions  
Ins. Amt: 240.00 Dental Amt: .00 Retire Amt: 925.00  
Dept Wage: Amount: 10 50 1500.00 10 60 1500.00 10 99 1000.00  
Total Salary: 4000.00  
CONTINUE ENTER KEY  
PRESS CONTINUE TO CLEAR SCREEN AND CONTINUE

9:31 a.m.



Rejuvenate the look of your legacy programs automatically – simply apply Faces to your applications and watch it work wonders in minutes. Protect system investments by adding graphical interface application productivity.

Fine-tune your Faces screens, or go to work immediately: with Faces the choice is yours. Point and click tools make customizing screens a breeze.

Ready-to-use buttons and objects are included, or quickly add buttons to do specialized functions. A simple brush of Faces over your legacy programs gives them the easy-access look your users need without any application changes.

Faces allows you to:

- ☐ Link legacy applications to Windows applications like Excel or Lotus 1-2-3.
- ☐ Create on-line hypertext help for all legacy applications.
- ☐ Build applications directly from any ODBC/SQL database (including IMAGE and IMAGE/SQL).
- ☐ Update multiple databases from a single screen.
- ☐ Interface E-mail systems, and much more...

Access information more efficiently with Faces from API International. For more information contact [patrick@apinet.com](mailto:patrick@apinet.com) or...

## Call 1-800-5 API USA

CIRCLE 59 ON READER SERVICE CARD





# HP 1000 Guru

**Q:** I have my own RTE-A Driver written for a custom I/O card. This was written many years ago on an A600 processor. I now find that this same driver does not work correctly on the A990 processor. It appears to be a timing problem. Is the speed of the A990 versus the A600 causing my problem?

**A:** When writing I/O drivers, it is often necessary to set up a timing loop while waiting for an interface card to acknowledge receipt of the last command. Typically, if the loop is exited before the card acknowledges receipt of the command, the driver then sets an error condition alerting the calling program that an error has occurred. Most often, timing loops fall into one of two categories: those that fall through the loop based only on the number of iterations through the loop, and those that wait for the flag flip flop on the I/O card to be set (or cleared). Typically the latter type will also have a counter associated with the loop to prevent waiting for the flag forever. Here are some examples:

Example 1:

```
lda count
isz a
jmp *-1
... continue
```

Example 2:

```
lda count
ina, sza, rss
jmp error
sfs card      skip if flag set
jmp *-3
... continue
```

In the first case, the driver writer has determined that a certain amount of time must elapse before proceeding beyond the loop. The length of time is

determined by the value of *count* and the execution times for the *isz* and *jmp* instructions. The execution times are CPU-dependent so, usually, the driver designer will set up *count* based on the CPUID or on the worst-case scenario (i.e., set *count* large enough so that even on the fastest A-Series—previously the A900—enough time will elapse before proceeding). Since the A990 is now much faster than the A900, these types of loops may fail if *count* is not adjusted.

In the second case, the driver is waiting for the flag to be set. The driver writer has determined that there is an error if the flag has not been set in *count* iterations through the loop. The value of *count* again is dependent on the CPUID and the instruction execution times. In addition, the behavior of the I/O card is understood such that the driver writer knows the maximum time the card will need to set the flag. Based on that information, the value of *count* can be determined. In an effort to minimize the effects of moving drivers from other A-Series CPUs to the A990, the timing has been changed for the Skip if Flag Set (*SFS*) and Skip if Flag Clear (*SFC*) instructions. This is not only because the A990 has a faster CPU cycle time than the A900, but also because the behavior of the instructions has been modified.

Let's describe the timing of the *SFC* and *SFS* instructions on the A900 first. The *SFC* instruction decides whether or not to skip based on the value of the flag. If the instruction decides to skip, then the skip is taken, and the next instruction is fetched immediately. If the instruction decides not to skip, a check is made to see if the currently executing instruction has the same opcode as the previous *SFS* instruction. If this is true, the machine waits an extra amount of time

before fetching the next instruction. The reason for this behavior is that if the previous *SFS* instruction has the same opcode as the current *SFS*, then there is a good chance that the computer is in a “skip flag set” loop, waiting for some I/O process (DMA, for example) to be completed. The skip on flag microcode runs so fast that it would keep the I/O backplane too busy with I/O instruction broadcasts, instead of letting much DMA traffic occur. Therefore, the microcode slows itself down to free up more bandwidth on the I/O backplane.

The *SFC* instruction on the A900 does not have this extra wait, even when the current *SFC* opcode is the same as the previous *SFC* opcode. It was assumed that no programmer would write a loop that used the *SFC* instruction to wait for DMA to finish.

The *SFS* instruction on the A990 has the same behavior as on the A900. That is, if the current *SFS* opcode is the same as the previous *SFS* opcode, an extra amount of waiting is done.

The *SFC* instruction on the A990 now includes the same extra wait as the *SFS* instruction. Again, the extra wait only occurs if the skip is not taken, and the current skip flag opcode is the same as the previous flag. The amount of time the instruction waits was calculated so that the entire time spent in the “SFS loop” is as close as possible to that spent on an A900. The desired effect is to minimize the number of changes to drivers when moving from previous A-Series processors to an A990.

Here is a table to help clarify matters:

	<b>A900</b>	<b>A990</b>
SFS, skip not taken	If same opcode, wait extra time	If same opcode, wait extra time
SFS, skip taken	Don't wait	Don't wait
SFC, skip not taken	Don't wait	If same opcode, wait extra time
SFC, skip taken	Don't wait	Don't wait

**Q:** I am trying to install the LP Spooler on my 6.1 ARPA/1000 system. I get undefined externals when linking RLPOUT and RLPDAEMON.

I checked the .lod files, and have referenced the network libraries. Am I missing something?

**A:** Yes, you are missing the Berkeley Sockets Library, which is required for linking RLPOUT and RLPDAEMON.

Unfortunately, the BSD\_CDS.lib library is not included with ARPA/1000. If you have the NS-ARPA/1000 product, then you can use the BSD\_CDS library from there.

In the future, the BSD library may be included with the ARPA/1000 product. In the meantime, if you want to use the LP Spooler with remote HP-UX machines, you can obtain the BSD library from the Response Center. This will enable you to link RLPOUT and RLPDAEMON.

**Q:** For several years I have been experiencing a problem with the RS program. It consistently fails with a RUNTIME ERROR 601. This problem has persisted over several different system updates. The program itself has been compared to a functioning copy on another system (The load maps are identical). What else should I be looking for?

**A:** Problems that affect a particular system and that recur over several revisions certainly indicate a problem that is *unique* to the *system* in question. So what is unique to a particular system? Well, certainly the location and system manager are unique. Another uniqueness is the hardware itself. In this particular case, the solution was discovered almost accidentally in the SYSTEM generation ANSWER FILE. The RTE-A Generator program is very forgiving and will not always report an error when in fact an INCORRECT sequence of commands is given.

The problem in this answer file was a missing “END” statement in the System Messages section of System Common.

```
re,/TE_A/%msgtb
end
re,/RTE_A/%$m000
end      <-----This END was missing
re,/VCPLUS/security.rel
end
end
```

Regenning with the correction solved the problem of RS aborting with RUNTIME ERROR 601.

Sometimes a close examination of the system answer file, and comparing it to the sample supplied with RTE-A, may be the only way to find the problem. ■

*HP 1000 Guru questions are answered by Walt Boeninger. He is a support engineer at the Mountain View Response Center and has been supporting the HP 1000 for 15 years.*



**F**ile transfer protocol—*ftp*—is one of the standard ways to transfer files between two computers in a TCP/IP, UNIX environment. Input to *ftp* includes the name of the remote host that you wish to contact, the user's name under which you log on, and the user's password. Once access has been obtained, you can download (or upload) one or many files according to the permission settings on the directories and files you wish to access.

*Anonymous ftp*, as the method is called, refers to logging into a remote computer using the *ftp* service with the user name "anonymous." This is not a real user name that is part of your system but rather a name that *ftp* knows about and deals with in a special manner. By allowing virtually anyone to log into a system, it provides for a general file retrieval service.

I will not go into setting up an anonymous *ftp* server (see the O'Reilly book, *Practical UNIX Security*, by Garfinkel and Spafford, pp. 245-246) but rather will concentrate

by Joe Berry



# ANONYMOUS

on how to use an anonymous ftp server for retrieving some of the “goodies” mentioned in the Internet Goodies column (this issue, p. 64). A variety of interesting files that can be downloaded are discussed there. The important question is: How do you actually download a file?

Looking carefully at the column, you will note that in the section headed **alt.sources**, I do not give any indication of where the software is located. When the software in **alt.sources** is first posted, it is actually part of the post. If you saved it, you have it. If you didn't, you'll have to find it. Finding this software will require a little bit of work. I'll discuss this later.

Software referenced in the column under **comp.sources.misc** is identified as being posted as a “volume, issue” pair of numbers. This, too, will be discussed later. For the other software, a computer site and pathname/filename combination specify where the software can be retrieved. This is what we will now discuss by way of an example.

### Site and Pathname/Filename

Under the **Miscellaneous** heading, I mentioned that someone had posted a copy of the Berkeley printer subsystem that had been ported to Solaris 5.3. Let's assume you would like this software (with the hopes of porting it to HP-UX). The software is located at *ftp.nus.sg*. Ordinarily, it is not recommended that you access ftp sites outside North America since typically the transmission speed is slower. However, it did not appear that the software had been distributed to more local sites (although, truthfully, I did not check).

To connect to this site in Singapore, enter the command

```
ftp ftp.nus.sg
```

This is what happened when I did that.

```
wayne>
wayne>ftp ftp.nus.sg
Connected to ftpserver.nus.sg.
220 ftpserver FTP server (Version wu-2.4(1)
                               Fri Apr 15 09:34:58 WST 1994)ready.
Name (ftp.nus.sg:joe): anonymous
331 Guest login ok, send your complete e-mail address as password.
Password:
```

Note that although it wasn't echoed, I entered *joe@unix.landmark.com* as my password. I was then rewarded with the following banner information.

```
230-+-----+
230-| Welcome to the National University of Singapore's FTP Server. |
230-| (ftp.nus.sg.) |
230-| ***** |
230-| |
230-| We now have 16 GB of disk space on the server now. |
230-| |
230-| Use ->ftp.nus.sg<- for your FTP needs first, before going on the |
230-| Internet. IT WILL BE FASTER. |
```

# FTP ACCESS



```

230-|
230-| We have mirrored popular PC/Mac/UNIX/etc archives. Move to the ~/pub |
230-| directory and look at the ARCHIVES.TXT file. |
230-+-----+
230-
230-
230 Guest login ok, access restrictions apply.

```

We need to `cd` to the correct directory. This is a proper ftp command:

```

ftp> cd /pub/NUS/ISCS/misc
250 CWD command successful.

```

At any time, you can enter `dir` to get an `ls -l` listing of the contents of the directory. In almost all cases you should then enter the command `binary` to tell ftp that you want subsequent files transmitted as binary files and not as ASCII files. If you do not know the type of file you have, enter `binary` because all files can be transferred correctly as binary files but not all files can be transferred correctly as ASCII files.

```

ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
total 1104
-r--r--r--  1 root    system    351375 Mar  8  1994 lpr-port-2.tar.z
-r--r--r--  1 root    system    152796 Feb 25  1994 lpr-sol2-p1.tar.gz
-r--r--r--  1 root    system    152566 May 11 03:09 lpr-sol2-p2.tar.gz
-r--r--r--  1 root    system    153437 Aug 25 02:40 lpr-sol2-p3.tar.gz
-r--r--r--  1 root    system    263957 Feb 25  1994 lpr-sol2.tar.Z 226
Transfer complete.
ftp> binary
200 Type set to I.

```

Note that the file we are interested in appears above in the `dir` listing output. To get the file, use the `get` command. The file will be placed in your current directory (where you were when you issued the `ftp` command).

```

ftp> get lpr-sol2-p3.tar.gz
200 PORT command successful.
150 Opening BINARY mode data connection for lpr-sol2-p3.tar.gz (153437 bytes).
226 Transfer complete.
153437 bytes received in 95.94 seconds (1.562 Kbytes/s)
ftp> quit
da221 Goodbye.

```

And now you have the file. You might get an error message saying you do not have sufficient permission. If the permission bits on the file you are accessing seem to indicate that all should be well, the problem may be that you were in a non-writable directory when starting ftp. You can quickly fix this problem without terminating your connection to the remote computer by using the `lcd` command (local change directory). You would enter

```
lcd /tmp
```

for example, and try doing the `get` again.

Once you have the file, you must “unzip” it (note the ‘gz’ suffix in the file name). To do this, enter the command

```
gzip -d lpr-sol2-p3.tar.gz
```

The next step is to untar the file and follow the README file’s instructions (assuming there is a README file or some other source of instructions). But what if you are really just starting the adventure of getting “goodies” from the Internet? What if you don’t even have the wonderful utility *gzip*?

In that case, your first step is to obtain the Free Software Foundation program *gzip*. This program is located on many, many ftp servers. One of the more popular locations is *gatekeeper.dec.com* (See? Digital Equipment Corporation does do nice things!). Do a

```
cd /pub/GNU
```

followed by a

```
dir gzip*
```

## Share Your Expertise

Submit an article to  
hp-ux/usr

hp-ux/usr editor Michael Ehrhardt seeks well-written user-submitted articles that address the real problems of both the new HP-UX user and the experienced administrator. The overriding criterion for selecting articles will be their excellence in both content and presentation.

Authors of articles chosen to appear in hp-ux/usr will receive \$65 per typeset page. Authors of articles that review hardware and software pertaining to HP-UX will receive an additional bonus of \$300 to \$800, depending upon the complexity of the review.

The preferred format for submitting copy is Word for Windows, followed in order of preference by Word for the MAC, WordPerfect, or pure ASCII text. Copy should be sent via Internet e-mail or on floppy disks. Any graphics or figures should be submitted in TIFF format.

For more information, contact Michael Ehrhardt at (800) INTEREX, (408) 747-0227, or Ehrhardt@interex.org

**interex**

The International Association of  
Hewlett-Packard Computing  
Professionals

## Make the UNIX to MPE Connection!

# IX/92™

### Full Featured HP2392A Terminal Emulation

**File Transfer**  
**Serial and LAN connections**  
**Script Language**  
**X Windows Option**

**Available for:**  
**HP-UX**  
**SCO UNIX**  
**Interactive UNIX**  
**SunOS/Solaris**  
**SCO XENIX**

**New Option:**  
**NS/VT Access!**

*Software Licensing Corp. is a leader in the development of HP connectivity solutions. Our technology has been incorporated into well-known terminal emulation products in use throughout the world.*

**Software Licensing Corp., Suite 280, 930 Tahoe Blvd. Unit #802**  
**Incline Village, NV 89451-9436**  
**Phone: (702) 832-0881 Fax: (702) 832-0883**

All trademarks are the property of their respective holders.

CIRCLE 33 ON READER SERVICE CARD

## Hewlett-Packard 9000

### It's Our Specialty

#### 200/300 Series

216/236/217  
310/320/330  
350/360/370  
318/319/340  
345/375/380

#### 400 Series

425e  
425t  
425s

#### 700 Series

705/710  
715/720  
730/750

*We also carry memory and interface for all of our workstations*

#### Printers

2225A/B/C/D  
3630A PaintJet  
C1602A PaintJet XL  
LaserJet II/IIID/IIIP  
LaserJet III/IIID  
LaserJet IIIP, IIIsi

#### Mass Storage

9121/9122  
9153A/B/C  
7957A/B  
7958A/B/S  
7959B/S  
7963B  
C2213A/D  
DAT Drives  
CD ROMs  
Optical Drives

#### Plotters

7440A ColorPro  
7475A 6-Pen  
7550A/B Self-Feed  
7570A DraftPro  
7575A DXL, 7576A EXL  
7595A/B/C DraftMaster I SX  
7596A/B/C DraftMaster II RX  
Electrostatic  
DesignJet

#### Specials

7585A/B Plotters  
HP Vectras  
380C+ Workstations



*We offer large discounts,  
outstanding service  
and immediate delivery.*

**TED DASHER & ASSOCIATES**

4117 Second Ave. S.  
Birmingham, AL 35222  
PH: 800-638-4833  
FAX: 205-591-1108

CIRCLE 49 ON READER SERVICE CARD



The latest version of *gzip* is Version 1.2.4. You will want to execute the command

```
get gzip-1.2.4.tar
```

(after having done a **binary**, of course). It's 798,720 bytes long. Don't get the smaller gzipped version! Once you have the file, untar it, compile, and go.

Be aware that with all the recent interest in the Internet, more and more people are accessing files from all over the world. The following has happened to me on more than one occasion.

```
wayne>ftp ftp.uu.net
Connected to ftp.uu.net.
220 ftp.UU.NET FTP server (Version wu-2.4(1)Thu Apr 14 15:45:10 EDT 1994)ready.
Name (ftp.uu.net:joe): anonymous
530- Sorry, there are too many anonymous users using ftp.UU.NET at
530- this time. There is currently a limit of 85 anonymous users.
530- Please try again later.
530 User anonymous access denied.
Login failed.
ftp> quit
```

## Volume/Issue

Let's look at how to access software that was posted to a specific volume and issue. In the Goodies Column, I discuss a program that prints barcodes on HP laser printers. The program can be found in volume 44, issue 51 of *comp.sources.misc*. Our goal now is to find a repository of the Usenet group *comp.sources.misc*. A good candidate is *gatekeeper.dec.com*. We access this ftp server just as we accessed the server in Singapore:

```
wayne>ftp gatekeeper.dec.com
Connected to gatekeeper.dec.com.
220- *** /etc/motd.ftp ***
Original by: Paul Vixie, 1992
Last Revised: Richard Schedler, April 1994
```

Gatekeeper.DEC.COM is an unsupported service of Digital Corporate Research.  
Use entirely at your own risk - no warranty is expressed or implied.  
Complaints and questions should be sent to <gw-archives@pa.dec.com>.

EXPORT CONTROL NOTE: Non-U.S. ftp users are required by law to follow U.S. export control restrictions, which means that if you see some DES or otherwise controlled software here, you should not grab it. Look at the file OOREADME-Legal-Rules-Regs (in every directory, more or less) to learn more. (If your the treaty between your country and the United States did not require you to respect U.S. export control restrictions, then you would not have Internet connectivity to this host. Check with your U.S. embassy if you want to verify this.)  
Extended commands available via:

# Telenomics

Since 1983

Telephone Management Software/Call Accounting  
for the HP/3000's from PBX or CENTREX into your  
IMAGE Database, General Ledger, E-Mail system and Desktop PC

*Specializing in replacing stand alone systems sold  
by PBX Distributor, or customers who want it right the first time*

## Free Video Tape on Telephone Management Uses

- |                               |  |
|-------------------------------|--|
| ■ Toll Fraud Detection        | ■ Multiple Site Capabilities (at discount)   |
| ■ E-Mail Reporting Interface  | ■ Student billing for Universities/Colleges  |
| ■ G/L Interface               | ■ Voice Mail, Auto Attendant   |
| ■ Call Detail Reporting       | ■ T-1's  |
| ■ Charge Back Allocations     | ■ Service Bureau option (using our HP 3000<br>enabling you to log on for inquiry and<br>reporting) |
| ■ Traffic and Trunk Analysis  | ■ Discount long distance service with<br>most all major carriers                                   |
| ■ On-Line Telephone Directory | ■ Custom and project programming services  |
| ■ Inventory and Work Orders   |  |

*NO BUDGET REQUIRED OPTION ... We offer all major traffic carriers through our partnership programs. Give us  
your long distance traffic, if we can beat or meet your current rate we will allocate the PWARE software costs  
at \$1.25 a month per station*

## LOOK! WE SHRUNK THE PBX!

*Some Digital PBX's are now smaller than tower PC's.  
Fiber Optics made it possible.  
Size, price and maintenance has also shrunk.  
PBX's are offered through our Partnership Program.  
Call for details.*



**CHANNEL  
PARTNER**

Call for Literature Package (Demo Disks also available)

# (800) 328-1177

31566 Railroad Canyon Road, Canyon Lake, California 92587 (909) 694-1646 or (800) 328-1177  
CIRCLE 21 ON READER SERVICE CARD



```
quote site exec COMMAND
```

Where COMMAND is one of:

```
index PATTERN  - to glance through our index (uses agrep).  example:
                  ftp> quote site exec index emacs
locate STRING   - like "index", but faster and without RE support. ex:
                  ftp> quote site exec locate updatedb
```

This FTP server is based on the 4.3BSD-Reno version. Our modified sources are in /pub/DEC/gwtools.

If you are connecting to gatekeeper from a VMS system running a version of UCX earlier than V2.0, a bug in UCX will prevent the automatic login from working. To get around this, wait for the message that says:

```
%UCX-E-FTP_LOGREJ, Login request rejected
```

and then log in by hand with the "login" command at the "FTP>" prompt. You should also consider upgrading to the latest version of UCX.

```
Name (gatekeeper.dec.com:joe): anonymous
331 Guest login ok, send ident as password.
Password:
230 Guest login ok, access restrictions apply.
```

Note the rather verbose greeting. Do read it, though, since it may contain important information about where your prospective files are located.


```
ftp> cd pub/usenet
250 CWD command successful.
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
total 10
lrwxr-xr-x  1 root      system      31 Oct 24 10:45
                OOREADME-Legal-Rules-Regs -> ../../OOREADME-Legal-Rules-Regs
dr-xr-xr-x 16 root      system      512 Oct 24 10:12 comp.sources.games
dr-xr-xr-x 47 root      system     1024 Oct 24 10:37 comp.sources.misc
dr-xr-xr-x  5 root      system      512 Oct 24 10:37 comp.sources.reviewed
dr-xr-xr-x  7 root      system      512 Oct 24 10:37 comp.sources.sun
dr-xr-xr-x 30 716       system     1024 Oct 24 10:43 comp.sources.unix
dr-xr-xr-x191 root      system     4096 Oct 24 10:45 comp.sources.x
226 Transfer complete.
```

Note the different news groups that are archived here. Obviously we want to

```
cd comp.sources.misc
```

For brevity's sake, I edited out most of the directories that appeared when I did the next `dir`. Note that there is a 'volume44'.

*Continued on Page 32*

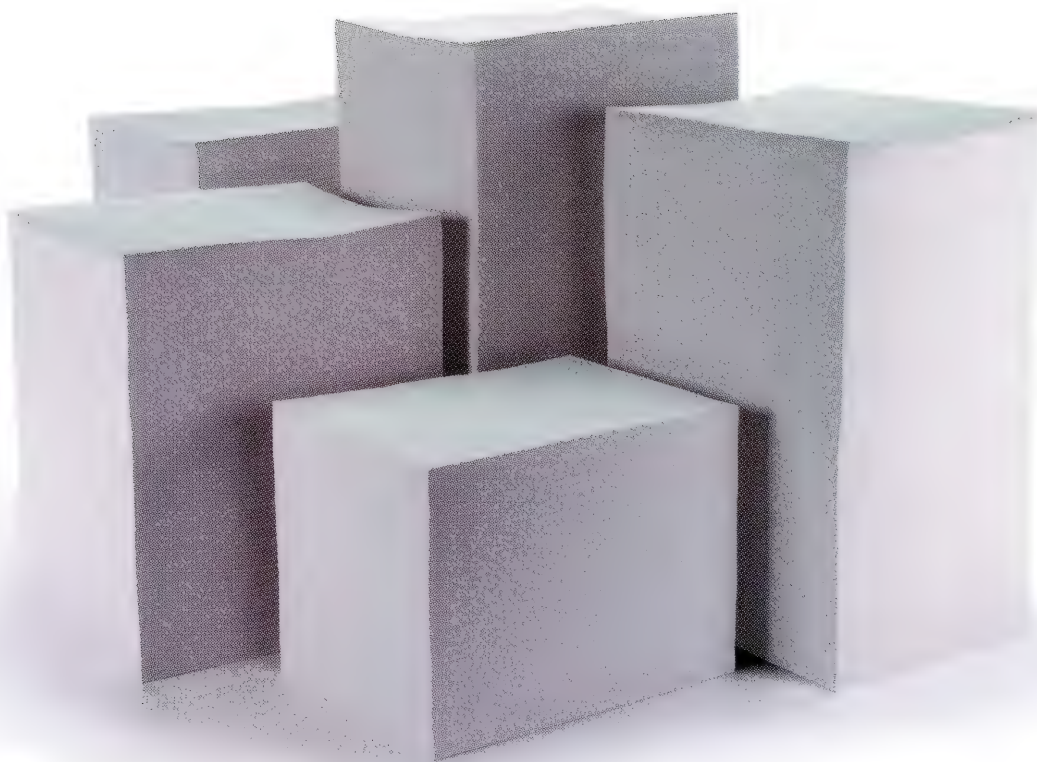


# Are Your Reports Worth The Paper They're Printed On?

The cost of printing is more than just paper and toner. Time spent handling information becomes a significant part of the equation.

When you add it all up, Vista online report viewing empowers users to save natural resources and gives them faster, easier, more flexible access to data.

Vista, for MPE and HP/UX systems, supports and automates all phases



of the electronic report management cycle.

Report distribution is simplified and enhanced by delivering files on-line to multiple users, confirming delivery and providing attachable "post-it" notes to specific data or entire files.

Rekeying is no longer necessary because information can be directly downloaded to DOS or Windows applications. And since Vista provides the most

comprehensive indexing and search capabilities available, you'll never have problems locating the information you need.

Vista makes reporting worth it. Call Quest Software for more information 714-720-1434 or e-mail: [info@quest.com](mailto:info@quest.com)

**QUEST  
SOFTWARE**



CIRCLE 102 ON READER SERVICE CARD



```

ftp> cd comp.sources.misc
250 CWD command successful.
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
total 197
-r--r--r-- 1 root system 63854 Oct 23 15:08 index
-r--r--r-- 1 root system 71383 Sep 12 1993 index.1-20
-r--r--r-- 1 root system 1732 Nov 12 1992 shareware
dr-xr-xr-x 26 root system 1024 Oct 24 10:31 volume33
dr-xr-xr-x 35 root system 1024 Oct 24 10:31 volume34
dr-xr-xr-x 34 root system 1024 Oct 24 10:32 volume35
dr-xr-xr-x 26 root system 1024 Oct 24 10:32 volume36
dr-xr-xr-x 32 root system 1024 Oct 24 10:33 volume37
dr-xr-xr-x 33 root system 1024 Oct 24 10:33 volume38
dr-xr-xr-x 34 root system 1024 Oct 24 10:34 volume39
dr-xr-xr-x 9 root system 1536 Oct 24 10:34 volume4
dr-xr-xr-x 36 root system 1024 Oct 24 10:35 volume40
dr-xr-xr-x 43 root system 1024 Oct 24 10:35 volume41
dr-xr-xr-x 32 root system 1024 Oct 24 10:36 volume42
dr-xr-xr-x 32 root system 1024 Oct 24 10:36 volume43
dr-xr-xr-x 19 root system 1024 Oct 24 10:36 volume44
dr-xr-xr-x 3 root system 512 Oct 24 10:36 volume45
226 Transfer complete.
ftp> cd volume44
250 CWD command successful.

```

By doing a `dir` here, we see all the files that became part of volume 44. And there is our *hp-barcode* as a directory. We must then do a

```
cd hp-barcode
```

and see what is there to access.

```

ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
total 223
lrwxr-xr-x 1 root system 37 Oct 24 10:36 OOREADME-Legal-Rules-Regs ->
    ../../../../OOREADME-Legal-Rules-Regs
dr-xr-xr-x 2 root system 512 Oct 24 10:36 a32src
dr-xr-xr-x 2 root system 512 Oct 24 10:36 arg_parse
dr-xr-xr-x 2 root system 512 Oct 24 10:36 c++2latex
dr-xr-xr-x 2 root system 512 Oct 24 10:36 cproto
dr-xr-xr-x 2 root system 512 Oct 24 10:36 dist-3.0
dr-xr-xr-x 2 root system 512 Oct 24 10:36 dnswalk
dr-xr-xr-x 2 root system 512 Oct 24 10:36 fcurses

```

```

dr-xr-xr-x  2 root    system      512 Oct 24 10:36 hp-barcode
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 ibpag2
-r--r--r--  1 root    system    27343 Jul 24 21:43 intro44.Z
dr-xr-xr-x  2 root    system     1024 Oct 24 10:36 jpeg
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 mailagent
-r--r--r--  1 root    system    15370 Jul 24 21:44 patchlog44.Z
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 rocat
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 toy_os
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 typhoon
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 unzip
dr-xr-xr-x  2 root    system      512 Oct 24 10:36 va.h
dr-xr-xr-x  2 root    system     1024 Oct 24 10:36 vim
226 Transfer complete.
ftp> cd hp-barcode
250 CWD command successful.
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
total 5
lrwxr-xr-x  1 root    system        40 Oct 24 10:36
      OOREADME-Legal-Rules-Regs -> ../../../../OOREADME-Legal-Rules-Regs
-r--r--r--  1 root    system     3931 Sep  5 23:00 part01.Z
226 Transfer complete.
ftp> binary
200 Type set to I.
ftp> get part01.Z
200 PORT command successful.
150 Opening BINARY mode data connection for part01.Z (3931 bytes).
226 Transfer complete.
3931 bytes received in 3.532 seconds (1.087 Kbytes/s)
ftp> quit
221 Goodbye.
wayne>uncompress part01

```

Downloading file *part01.Z* is all that is required to get the *hp-barcode* software. The standard UNIX *uncompress* command is used to expand the file, *part01* (we know to use *uncompress* because the suffix is '.Z'). This will undoubtedly be an ASCII file (with mail headers, as it was originally posted to Usenet that way). Follow the instructions for unpacking the software as they are described in the file and then you will be done.

There are many other commands to ftp. Those that I think you might find useful (at least those that I have found useful) include **hash**, **prompt**, and **mget**. If you enter the comand **hash** before you start the **get**, ftp will display hash marks (the pound symbol) for every 1,024 bytes transmitted (if you are on a fast link, you'll see hash marks for every 8 Kbytes transmitted). This helps to give you a

warm, fuzzy feeling seeing that everything is working when you are receiving a large file.

If you want to download a number of files that can be defined with an expression, then you'll want to use **mget**. The **get** command allows you to specify only one file name. For example, enter

```
mget fred*
```

to download all files that start with the letters "fred." ftp will prompt you to confirm the transmission of each file before it begins copying that file. If you wish to bypass this interactive confirmation, simply enter **prompt** before you begin the **mget** operation.

And that is all there is to ftp. Not! If you are in a perverse mood, you might try entering the command **help** to see how many commands we did not discuss. There's almost enough to write a book! ■

---

*Joe Berry is a senior software developer at Landmark Systems Corporation in Vienna, Virginia. He is one of the authors of Landmark's performance monitor, TMON for UNIX. A former HP 3000 systems specialist for Hewlett-Packard, he has been in the computer industry for more than 20 years. He can be reached at joe@landmark.com.*



# CLOSING THE HOLES IN HP-UX

Illustration by Courtney Granner



**T**he recent expansion of the information superhighway has given all of us access to more data than ever before. Unfortunately, this opening of the lines of communication has also exposed our own data to the world. Although most of the browsing of our systems is typically harmless curiosity, steps must be taken to guard our most valuable resources. The surest way to protect your system is never to interface with the outside world. This would, however, deny you access to many valuable sources of information. It also does not protect you from tampering by individuals within your local network.

System security is a finely tuned compromise. As a security administrator, your task is to provide all of the tools necessary

out allowing them to reconfigure or destroy your system. The ability to grant various levels of access is built into the UNIX operating system. Once these controls have been established, they must then be monitored to ensure that your security scheme is solid.

The files that control the core of the operating system are the responsibility of the systems administrator. Since such files control access to the entire system, the systems administrator must maintain privileges to them. It is possible to automate procedures to confirm the validity of system files, and thereby increase the confidence in your security. The goal of this discussion is to show some of the critical files, and provide methods for their authentication.

Effective operating system security requires cooperation of all who use the system. In order to protect the integrity of your data, each user must understand the responsibility that comes with the assignment of a login. Once this is clear, then the system administrator's task of securing the operating system will be more manageable.

The management of security in a UNIX operating system can be broken into three key components. The first, and perhaps most critical, factor is the prevention of unauthorized system access. If an intrusion does occur, it is important to know about it as soon as possible. Intrusion detection is the second key factor in security management. After a break-in, it is necessary to clean up the system, and verify that no corruption or re-entry points have been left behind. System recovery is the third component of security management.

### ***Intrusion Prevention***

The prevention of system intrusions is perhaps one of the most publicized topics today. With the rapid expansion of the information superhighway, information technology managers have the difficult task of gathering all of this data, without exposing their own systems. In order to reach this goal effectively, a security plan should be formulated. This plan should contain a definite strategy on how access should be granted, as well as how any adverse situation should be handled.

Much of the security of a system can be dealt with through a few simple practices. Access for authorized users should be kept to a minimum, and granted on an "as-needed" basis. It is easier to increase the access for a user than it is to remove privileges that were mistakenly granted. Access is controlled by membership

in groups in the */etc/group* file and by permissions of files and directories in the file system. System directories, such as */etc* and */bin*, should never be writable by any login other than root. Otherwise, components of the operating system may be removed, or replaced with corrupted versions. The home directory for root should also be included in this list. For the most part, except for */tmp* and */usr/tmp*, a directory created by the operating system install should be modified only by the operating system. User access can also be controlled by the choice of shell that the accounts use. In addition to the Bourne, Korn, and C shells, the *rsh* and *rksh* shells are also available under HP-UX. The restricted Bourne and Korn shells perform much like their predecessors, while hiding parts of the operating system from the users.

Since the main philosophy behind the development of UNIX was the sharing of information, it is difficult to take away the operating system without creating adverse effects. This creates some of the problems with security. If a hacker knows what system is being used, then the potential invader will have a better idea of commands to use to attempt to break in. The most common place to start is the */etc/passwd* and */etc/group* files. From these, it is possible to determine what accounts exist, what access they have, and whether passwords have been set. This is a key reason for keeping user access limited, as it can be expected that end users will not be as security conscious as systems administrators.

Through SAM, it is possible to turn on security measures to help protect this vulnerability. One of the important safeguards here is the generation of a shadow password file. The encrypted password string is replaced with an "\*" in */etc/passwd*. Therefore, normal functions such as *finger* will still work, but attempts to crack the password will be thwarted. The real password file is moved under a directory called */.secure*, which is accessible only to root. Since nobody else can read the encrypted password string, they cannot attempt to decode the password through the use of a popular public domain software package known as *Crack*. It is also a good idea to enforce password aging. This is done in the encrypted password field, where a two-character entry is placed after the encrypted string, with a comma acting as the separator. The two characters in the aging string represent the mandatory frequency of password changes and the minimum time that must pass between changes. This measure acts as a deterrent to brute force methods of password breaking.



Another piece of information that may be dangerous to announce is created on the initial system setup. A file named */etc/issue* is generated during the installation of the operating system. *getty* displays this file unless told to do otherwise in */etc/inittab*. The problem with this file is that the initial default is to display the hardware and operating system versions in use, which is valuable information for someone attempting to crack the system. This file should be either emptied or replaced with a message advising of the legal ramifications of an unauthorized access.

When a system is connected to a local area network, another group of files is added to the list of critical system files. The */etc/services* file specifies which Internet services will be available from that particular host. Two more files, */etc/inetd.conf* and */usr/adm/inetd.sec*, control the usage of these services. The *inetd.conf* file specifies which program will be called for a particular service; for example, a telnet request will be serviced by */etc/telnetd*. The usage of these services may be restricted by using the *inetd.conf* file. Here, it is possible to allow or deny usage of a service to a particular host. The Hewlett-Packard default is to allow global access to any service not specified in *inetd.conf*. This also makes */etc/hosts* a critical file if any restrictions have been placed on specific hosts.

Access over TCP may be made easier through the use of *hosts.equiv* and *.rhosts*. When a remote system is listed in */etc/hosts.equiv*, any user common to both systems may use the *remsh*, *rcp*, and *rlogin* commands to access the local system from the remote without being required to provide a password. This functionality is not allowed to any super-user accounts. A *.rhosts* file in a user's home directory

performs the same function, but on a "per-user" rather than a system-wide basis. This file may be configured to allow any user from any known host to access the local system as that user through *rlogin*, without requiring a password. The *remsh* and *rcp* commands would also be operational. Unlike *hosts.equiv*, root may take advantage of the use of a *.rhosts* file. This is a very important reason for making sure that no accounts can write to root's home directory, as it would be dangerous to allow users to create their own *.rhosts* file into the root account. Individuals should be advised to take similar precautions on their home directories.

In addition to software, there are two hardware entry points that should be noted. Unattended terminal sessions are perhaps the largest vulnerability on any system. A login session for the root user should never be left alone. When the authorized person is away from the terminal, the superuser session should at least be put into *lock*. A better idea would be to log out, and re-enter the system when it is again needed. The Korn shell contains the functionality to enforce non-interactive logouts with the use of an environment variable. When *TMOU* is set, an unused session will be terminated in the number of seconds determined by this variable. The time-out will be enforced when a port contains no processes other than the shell. Modems are another area of concern. When possible, they should be brought through a terminal server, a router, or some other piece of hardware that is capable of screening out unwanted connections. If a modem is to be connected directly to the serial port or mux strip, then password protection should be used.

Password protection of a modem line is enabled by the creation of two files, */etc/dialups* and */etc/d\_passwd*. The first is a list of all ports that have a modem directly attached. An example of this file would be:

```
#Modem port assignments
#
/dev/ttyd0p5      #mux port 5
/dev/ttyd0p6      #mux port 6
/dev/ttyd00       #serial port 0
```

The */etc/d\_passwd* file looks similar to the */etc/passwd* file, except that the user names have been replaced by shell program names. An example of this file would look like:

```
/bin/ksh:/48UqDFc.kAFI:0:0::
/bin/sh:84rOfhjarZcsm:0:0::
/bin/csh:t4d/m84.095Fg:0:0::
/usr/bin/keysh:*:0:0::
/bin/posix/sh:*:0:0::
```


To create this file, use any editor to add all entries except for the encrypted password string. Then, execute the command

```
passwd -f /etc/d_passwd < shell name >
```

Continued on Page 39

# Double VISION™

**Access And Control  
Any Terminal, Anywhere,  
Without Leaving Your Seat.**

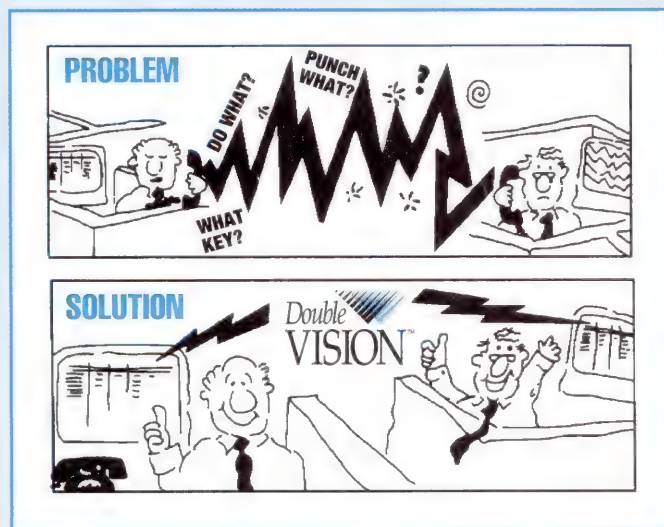

**Double your efficiency.  
Double your productivity.  
Double your savings.**



**MaxTech**

1000 Cobb Place Blvd., N.W. • Building 200 • Suite 240 • Kennesaw, GA 30144  
800-582-9337 • 404-428-5000 Office • 404-428-5009 Fax

**Now Available for X Windows**

*Sound impossible? Not with  
Double VISION™!*

Double VISION™ is THE premier remote control software utility for UNIX systems. It literally allows you to be in two places at once! No, its not a teleportation device, but easy to use, highly functional, remote control software. It allows a support engineer to see what is on another user's screen AND have full control of the keyboard. From his terminal, your engineer can see user problems for himself and solve them FAST. To the troubled user, it will seem as if your engineer is watching over their shoulder. Double VISION™ doubles your efficiency!

Double VISION™ will allow your support engineers to cut their average support call time in half, and completely eliminate most on-site visits. Never again will your support engineers go on-site to "see the problem for themselves". Think about it; less time spent on the phone, and less time spent on the road, equals more customers helped and more problems solved. Double VISION™ doubles your productivity!

Double VISION™, however, goes far beyond being a great support tool. Thousands of users worldwide are using it to conduct training classes and remote demonstrations without sending personnel on-site. Imagine the increase in sales when you can show your prospect that hot new product while he sits in his office, and you sit in yours. No more traveling, no more overnight shipping of demo software, no more waiting to close sales. Finally, you can conduct highly interactive, highly effective, training sessions and product demonstrations all while saving hundreds, even thousands of dollars in travel expenses. Double VISION™ doubles your savings!

**N**ow that you know what Double VISION™ can do, what are you waiting for? Get your first copy today, and see for yourself why we say—

*Double VISION™...Because a  
picture is worth a thousand words!*



## File-Checking Scripts

The four scripts given here work in pairs:

*change* and *fixconf*  
*fchng* and *fixsum*

The *change* and *fixconf* scripts work as a pair to monitor changes in critical files. Backup copies of each file are kept to decrease recovery time. One file, */root/check*, must be created for this software to operate. The *check* file should contain a list of files that are considered critical.

The *fchng* and *fixsum* scripts also check for modifications in critical files, but they do so by taking a checksum of each file and comparing it against an earlier measurement. The file */root/chkfiles* is used to indicate which files are considered critical.

In both cases, the *fix* program should be run upon creation of the list of critical files, and again any time that these files are intentionally modified. The *change* and *fchng* scripts should be run on a regular basis, and prior to any modifications of a critical file.

```
#!/bin/ksh
#
#  change:  Checks for changes in files defined in "check".
#           Copies of each file are kept in the /root/config
#           directory. This method takes more space to hold
#           the copies, but provides the most thorough recovery.
#
#  Joe Pennell:  September 1994
#  adapted from the original concept of fchange.sh by Steve Isaacson
#  published in SysAdmin  May/June 1993
clear
### Special consideration is given to /etc/passwd, as the encrypted
### string and gecost are user modified and may cause a false alarm
cat /etc/passwd | awk -F: '{print $1":"$3":"$4":"$6":"$7}' > /tmp/pwshort

### Look through each file in "check" for changes
for file in `cat check`
do
    cfile=/root/config/`echo $file |awk -F/ '{print $NF}'`
    if { diff $file $cfile > /dev/null; }
    then
        continue          ### Files match
    else
        ### If a change was made, print out the differences
        echo "$file has been changed"
        echo "The following lines were added:"
        diff $file $cfile |grep \< |cut -c3
        echo
```

Continued on Page 41

# Finally!

# Real Printer and Print Queue Management for UNIX!



*"LP Plus has filled a vast void UNIX has in dealing with printer spooling needs. Fantastic product!"*

Gary Dame, MIS Director-Pacific States CIP

The print command you get with UNIX gives you the "bare bones" of printing, and not a bit more.

**LP Plus** delivers the control and flexibility needed to manage a dynamic print operation.

It's a product designed by people who realize that priorities change, printers break down, and sometimes only one page of a 50-page report needs to be printed.

## LP Plus...

- ◆ Delivers only the printing you want, a page at a time, a range of pages, or an entire job
- ◆ Lets you suspend and start printing at any page, or at the last page printed
- ◆ Provides real-time printer and queue status
- ◆ Offers true bi-directional UNIX/Novell printing\*
- ◆ Provides complete lpd/lpr compatible printing
- ◆ Lets you decide which spool files to retain, which ones to purge,... and when

\*Requires NovPrint™ and Netware's TCP/IP (an NLMP included with Netware v3.11 or later).

Whether your system has two serial printers or 200 network printers, LP Plus lets users and administrators manage their print environment.

Call 1 800-274-1627, for a **free evaluation** copy. Use the complete product for 30 days. If you are not satisfied that LP Plus greatly enhances the productivity of your print operation, simply remove LP Plus and give the print operations back to UNIX.

**Digital Controls**



The LP Plus Logo is a registered trademark of Digital Controls Corporation. All brand and product names appearing herein are trademarks or registered trademarks of their respective holders.

CIRCLE 24 ON READER SERVICE CARD

for each shell listed. Any shells that should never be used over the modem lines (such as `/usr/bin/keysh` and `/bin/posix/sh`) can be denied by adding a \* to the encrypted password string field. Any shell not listed in this file is assumed to be unprotected. In this example `/bin/rsh` and `/bin/rksh` would not require a password. With this functionality enabled, the modem users will see two password prompts. Once a normal login sequence has been successfully completed, the operating system will then detect a protected shell being run on one of the listed ports. This will generate a challenge for another password, at which time the password for the shell is given. This method will allow at least a degree of filtering on modem access, but it should be remembered that it is secure only if the password distribution is kept to a minimum.

More than anything, securing a UNIX operating system requires a modification to regular daily habits. If you want to make sure that your system is not subject to intrusion, then make sure that your data is restricted to the users that you intended it for. A little extra care in checking permissions, and cleaning up behind yourself, will go a long way towards securing your system.

### Intrusion Detection

No matter how much time and effort you invest in securing your file system, it is never safe to assume that it is totally impenetrable. It is vital to perform periodic checks for intrusion. Early detection is important to damage control. The big question is how to determine when your file system has been breached.

First, always know who is on your system, where they are connecting from, and

# HERE'S YOUR SOLUTION!

Quality products at affordable prices for

## HEWLETT-PACKARD/APOLLO®

Workstations,  
Peripherals and Upgrades



**CMI**

Computer Marketing International, Inc.®

85 Flagship Drive  
No. Andover, MA 01845 USA

- NEW and REFURBISHED
- Repairs
- 100% Customer Satisfaction
- Free Technical Support
- Immediate Delivery

Tel: 800-497-4264

508-687-3700

Fax: 508-689-2031

Int'l. Fax: 508-687-4395

CIRCLE 150 ON READER SERVICE CARD



what they are doing. The commands `who`, `-u` and `w` show everyone who is currently logged in, and the IP address that they have connected through. The latter also indicates the current command being executed by each user. Periodic use of these will give you a general idea of what is occurring on your system. Anything that seems to be out of place may be further examined by using the `ps` command. With this utility, it is possible to track all activity to a particular port or user. The use of `vi` on one of the determined system files should be questioned. Viewing the `/etc/passwd` file should also be of possible concern. Another method of activity tracking is made available when you are using the Korn shell. Each user has a `.sh_history` file in his or her home directory, which serves as a record of the commands they have executed. The one drawback to this method of tracking is that the file, in order to be used, must be modifiable by the user. If it is known that this file is in use, it may be edited to cover activities.

An intrusion into the system is often brief and may not be detected during the incident. However, anyone who manages to break in will be likely to leave a re-entry point for future use. This is where the system files become critical. An intrusion may often be detected by changes in such areas as the password file, a root `.rhosts` file, or SUID programs. Management of these files may help maintain system security, as well as provide for recovery in the event of tampering. The most effective way to provide for this is to create a backup copy of your critical files in a safe place, such as a hidden directory or on removable media, if possible. Intrusion detection is performed by comparing the contents of the live system file to the backup you have saved. Some differences may

appear, such as the encrypted password string for a user who has recently changed passwords. But, most of the data should remain constant. The drawback to maintaining the full set of files is the space that is required.

Another good way to verify the integrity of the system files is to create a file with the *sum* of each system file. For `/etc/passwd`, it will be necessary to create an intermediate file with the encrypted `passwd` and the `gecos` stripped out before performing a checksum. This will help eliminate the inconsistencies created by modifications that users are allowed to make. The checksum method will give a reasonable level of confidence that the information is correct, and requires less space than maintaining a second copy of all files. However, it does not provide the recoverability the first method offers.

SUID programs are another source of concern when securing a system. Some programs must execute a root, and therefore have a permission string that resembles `r-sr-xr-x` when an `ls -l` is performed on the file. When checking the file system, it is important to make sure that no such file owned by root is writable by anyone other than root. The `find` command has the options of `-perm` and `-user`, which can be used to help find such programs. It might also be advisable to maintain a list of known SUID programs, and look for any that cannot be identified. If a system has been breached by a local user, this would be the easiest way for that individual to obtain root access at any time.

One example of how this may be used is for a user to make a copy of `/bin/ksh` in his own home directory. Once he has breached the root account, he may change the ownership of this file to root, with the permissions allowing

SUID execution. Thus, anytime he accesses the special version of `ksh`, he calls a Korn shell with superuser privileges.

The `/usr/adm` directory also contains several useful tools for system monitoring. The `sulog` file shows all user attempts to execute `su` to become another user. Each entry contains the original user, the user that was switched to, and a record of whether the switch was successful or not (indicated by a + for yes, or a - for no). This directory also has a `shutdownlog` file, which holds a complete record of all known halts, reboots, and panics. The only activity that cannot be recorded is the powering off of a live system. This is important because a system is vulnerable during the power-up sequence. If someone has the ability to shut your system down and to reach the console on the power-up, then he may secure superuser privileges by interrupting the boot sequence and bringing the system up in single user mode. The shutdown log is the place to start searching if this activity is suspected. The `/etc/shutdown.allow` file may also provide a clue, since membership in this file is required to perform a normal shutdown.

Another highly useful file in the `/usr/adm` directory is `syslog`. This file contains a complete listing of all system notices, warnings and errors since the last reboot. It also holds information on all TCP connections that have been made. Any session (`rlogin`, `telnet`, `ftp`, etc.), is recorded in `syslog` with a unique identification. Thus, that session can be traced for activity. This may be especially useful for determining which files were transferred by an `ftp`.

### System Recovery

Once an intrusion has been detected, the number one question will be how

*Continued on Page 43*

Continued From Page 38

```
    echo "The following lines were removed:"
    diff $file $cfile |grep \> |cut -c3
    echo "*****"
    echo
    echo
    fi
done
exit 0

#!/bin/ksh
#
# fchgng:  Utility to monitor file changes
#         This utility keeps track of file checksums
#         in /root/confiles.
#         for the files defined in /root/chkfiles.
#         Output is then stored in /root/chgfile.
#         This is a very basic script, which only tells
#         if a file was changed, not what was done to it.
#
# Joe Pennell : September 1994
# adapted from the original concept of fchange.sh by Steve Isaacson
# published in SysAdmin May/June 1993
#
rm -f /root/chgfile

### Special accommodations are made for the passwd file because
### gecos and the encrypted password string can change
cat /etc/passwd |awk -F: '{print $1":"$3":"$4":"$6":"$7 }' > /root/passwd.sum
for FILE in `cat /root/chkfiles`
do
    if [ ``sum $FILE`` != ``grep $FILE /root/confiles`` ]
    then
        echo "$FILE has been changed" >> /root/chgfile
    fi
done

### If /root/chgfile exists, then there was at least one file changed.
### Mail the /root/chgfile to alert administrators.

if [ -f /root/chgfile ]
then
```

Continued on Page 42



*Continued From Page 41*

```
        cat /root/chgfile | mail root    ### Other accounts
                                         ###may be used here.
    fi
    exit 0
#!/bin/ksh
#
#   fixconf:  updates mirrored files for use with "change"
#
#   Joe Pennell,  September 1994
#   adapted from fchange.sh by Steve Isaacson :
#   SysAdmin May/June 1993

    cat /etc/passwd |awk -F: '{print $1":"$3":"$4":"$6":"$7}' > /tmp/pwshort
    for FILE in `cat check`
    do
        cp $FILE /root/config
    done
    exit 0

#!/bin/ksh
#
#   fixsum: Update checksum entries for critical system files
#
#
RDIR=/usr/accts/jpennell/sh/fchg
rm -f /$RDIR/confiles

### Set up modified passwd file /root/passwd.sum; which excludes
### gecos and encrypted password strings

cat /etc/passwd |awk -F: '{print $1":"$3":"$4":"$6":"$7}' > /root/passwd.sum

for C_FILE in `cat $RDIR/chkfiles`
do
    if [ -f $C_FILE ]
    then
        sum $C_FILE >> /$RDIR/confiles
    fi
done
exit 0
```

to return the system to a normal state. This process will be very much dependent upon the amount of corruption that occurred before your visitor was noticed. This is where a plan of action becomes important. The first step is to make sure that the intruder is gone. If not, take whatever measures are necessary to eliminate the threat. Next, change the root password for your system. It is possible that either your password was broken, or that the intruder changed it to see if you would catch this. Then, begin a sweep of the system in search of other re-entry points, such as *.rhosts* files and SUID programs. Once you believe that your system is secured, you should follow the logs to determine how the entry was made. The files noted in the previous sections should be able to be combined to form a picture of the intruder's login session. From here, you may be able to determine who this user was, and take appropriate action. If not, you may at least come away with useful information on how your system was breached, so that you can protect against such an attack in the future.


Once this information has been gathered, you must then determine what recovery steps are necessary. This will require a verification of your specific application data, to ensure that corruption has not occurred. If data corruption is found, you may wish to restore your system to the last set of successful backups prior to the detection of the intrusion. For a more thorough install, you may even want to reinstall the operating system, and then restore your data from backups. This will help remove any undetected "backdoors" that may have been left behind. This is the most critical case for a recovery.

Most normal recoveries will require the removal of tampering from system

# FINALLY!

**200+ Gbytes Near OnLine Storage  
Up To 7 gigabyte/hour Saves  
3 Minute Restores**

**For under a nickel a megabyte**

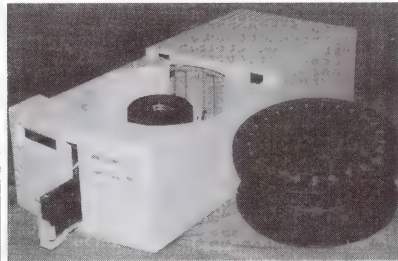

**Introducing The StorageTek 9704  
DAT Tape Library System**

**Prices starting at \$9,500.00**

- 100 gb Uncompressed, 200gb Compressed Total Capacity
  - (25 Cartridges, 4 to 8 gb Each)
- Parallel Backup Speeds Up To, And In Some Cases Exceeding, 7 gigabytes/hour (Dual HP DDS2 drives)
- Three Minute Restores (with DallasTools Software)
- Interchangeable Carousels
- Mainframe Reliability
  - (drive MTBF 200,00 hrs, electrical MTBF 175,000 hrs, Picker MCBF 1,000,000 cycles)
- On Site Service Available By StorageTek
- Options:
  - Bar Coding
  - Mirroring (create 2 copies at once for on and off site storage)
  - DallasTools Unix, Novell, and DOS backup and archival software



**DALLASTONE**  
2 Cote Lane  
Bedford, NH 03110

**Phone 603-647-8168**

**Fax 603-624-2466**

**Email [jjcarey@delphi.com](mailto:jjcarey@delphi.com)**

**CIRCLE 43 ON READER SERVICE CARD**

files. If you have chosen the method of maintaining a complete set of system files for intrusion detection, then your recovery is simply to copy the known good files into place. If the checksum method was used, then you will want to read through all of your system files to ensure that they are correct. Once all repairs have been made, the checksum file should be updated, since one extra space in the file will change the checksum.

### Conclusion

The most important part of system security is the amount of importance and consideration that it is given. Your operating system will be only as secure as the users allow it to be. This is a project that will require compliance by all who are granted access. Otherwise, your efforts will produce results that are not as effective as you desire.

For the systems administrator, security is an ongoing process.

Monitoring does not necessarily need to be a constant process, but it should be done frequently. As much as we would like to think that our systems will never be breached, we should be prepared for this event to occur. Despite all efforts to thwart intruders, it must be recognized that intrusion is a possibility. The goal is to be able to recover from an adverse situation, while minimizing any known points of exposure. ■

*A 1991 graduate of the Rochester Institute of Technology, Joe Pennell works in systems administration at Paychex, Inc., where he is responsible for user access and system security.*





Illustration by Christine Benjamin

# UNIX Boot Disasters:

## *Planning Your Alternatives*



Most of the time, we don't think about the complexities of booting an HP 9000. It just always works, time after time. But if you are a typical system administrator, you worry about the unexpected. It's your job to plan for the worst, and to know how to deal with it.

What are you going to do on the day your HP 9000 fails to boot? This article will discuss the possibilities that are available. Your choice will depend on what went wrong with the normal boot.

Here are some faults that make a boot fail, and what we can do:

- Bad/missing kernel file—use a different kernel.
- Bad/missing programs, scripts, or configuration files on the root disk drive—use different boot options.
- Fatal error in boot area or file system—use a different boot device.

The above faults are all similar in that they are matters of data that is not correct on the disk. The methodology of the fix is always to gain access to the disk, then rewrite or correct the data, or at least back up critical files. This article assumes that the fault is not in hardware. When hardware may be the cause, this methodology will give us ample opportunity to observe what works and what doesn't, see hardware error messages that occur, and make a clear diagnosis of the real fault. At that point we detour out of this methodology until the hardware is fixed.

### **Bad or Missing Kernel File**

The kernel is a file in the root directory, called */hp-ux* by convention. It is assumed that an alternate kernel will always be present in a file called */SYSBCKUP*. When utilities like *sam* create a new */hp-ux* file, the old one is moved to */SYSBCKUP*. In this case, */SYSBCKUP* will always be the next most recent version of your kernel. You can manage this better yourself. For example, two bad kernel generations in a row could

by Dennis McClure



leave you with no good copy. It's a good idea to make your own copy with a name of your own choice. Also, if you know that */hp-ux* is the best possible kernel for your system, then */SYSBCKUP* would serve you better if it were an exact copy of */hp-ux*.

The kernel file can be removed or changed while you are up and running. You won't know there is a problem until the next attempt to boot.

When there is something wrong with */hp-ux*, you can boot a different kernel. See below, after the next topic, for instructions on how to do it.

### Bad or Missing Programs, Scripts, or Configuration Files

The HP-UX boot procedure includes many complicated steps besides loading the kernel. The program */etc/init* runs. It reads */etc/inittab*, which indicates what run level to initiate and what things to launch for that run level. For a multiuser boot, many scripts run from the */etc* directory: *bcheckrc* checks file systems and then runs *fsck(1M)* if necessary; *brc* cleans up flags and the *mnttab* file; and *rc* initializes a long list of system processes and resources. File systems are mounted and network software starts. Then *gettys* are spawned and the console login is processed. Many of the files used during the boot process are idle between boots, making it possible for changes or deletions to happen while the system is up and running. The next time you try to boot, you might find the boot fails because of problems with these functions.

You can work around many of these problems by booting into single-user mode, and then fixing the things that are wrong.

### Booting an Alternate Run Level or Kernel File from the Root Disk Drive

#### Series 700s:

1. Initiate a normal boot (usually by turning the power off and on).
2. You will see "Selecting a system to boot. To stop selection process, press and hold the ESCAPE key." Press ESCAPE briefly rather than holding down the key. Allow the search for potential boot devices to finish. This is a poll of every device on the SCSI bus.
3. Boot from the root disk to the ISL> prompt, using the *ipl* parameter:

b p0 ipl (assuming that the root disk is listed as p0 in the search for potential boot devices)

If you need help identifying which device contains bootable software, use the "search" option from the menu, then enter the correct device:

p0 ipl

4. The system will boot to the ISL prompt. This is where you can specify what run level to boot into, and what file to use for the kernel:

ISL> hpux [-i<run-level>] <kernel file>

Examples:

For booting */SYSBCKUP*:

ISL> hpux /SYSBCKUP

For booting */hp-ux* into single-user mode:

ISL> hpux -is /hp-ux

For booting */hp-ux.old* into run-level 3:

ISL> hpux -i3 /hp-ux.old

#### Series 800s:

1. Initiate a normal boot (use "<cntl>b rs" on newer systems to avoid having to turn the power off and on).
2. Interrupt the boot when you see "press any key within 10 seconds."

"Boot from primary boot path (Y or N)?" Yes  
"Interact with IPL (Y or N)?" Yes

3. At the ISL> prompt, display the normal autoexecute command:

ISL> lsautofl (or the abbreviation "lsa")

You will see something like one of the following, depending on your 800 model and the use of LVM:

*Continued on Page 48*

# Join SIGUNIX via e-mail!

HP-UX server and workstation users can now join SIGUNIX, the Interex Special Interest Group (SIG) for UNIX users via e-mail.


To subscribe, send a message to {listman@interex.org}. The message should state: "sub sigunix firstname lastname."

Once on the list, you'll be included in SIGUNIX communications and you'll be able to send messages to other SIGUNIX members using the {sigunix@interex.org} address.

**interex**

The International  
Association of  
Hewlett-Packard  
Computing Professionals

## "Flight 1894"

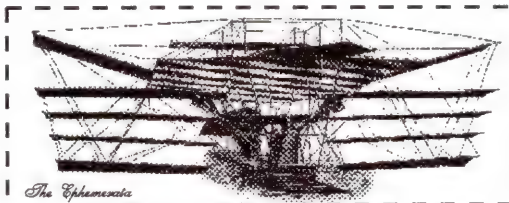

"Point & Shoot"  
GUI Report Writing

## "Reports 1984"

Defense Monthly				
Cat	Model	Year	Price	
F111	Tc	84	\$4800	
F14	Tc	86	\$6600	
F117	Tc	84	\$9800	



F-117  
Stealth

Flight's Evolution


## The Evolution of Database Publishing

### DbPower-GUI

Report Writing & Data Base Publishing

XWindows, Motif  
HP-UX, AIX, Solaris 1.1, 2.3  
Unixware, IRIX, DC /OSx

Db-Tech, Inc.  
3300 Holcomb Bridge Rd.  
Norcross, GA 30092  
1-800-234-4500  
dbtech@america.net

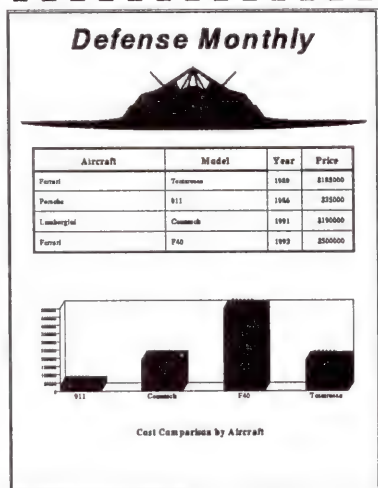

CIRCLE 35 ON READER SERVICE CARD



```
hpux (;0)/hp-ux
hpux disc1(4.0.2;13)/hp-ux
```

4. Enter the command essentially as you see it, changing or adding as needed. To change the kernel file name, change what appears after the “/”. To indicate a run-level, insert “-i<run-level>” after the hpux command.

Examples:

For booting */SYSBACKUP*:

```
ISL> hpux (;0)/SYSBACKUP
```

For booting */hp-ux* into single user mode:

```
hpux -is (;0)/hp-ux
```

For booting */hp-ux.old* into run-level 3:

```
ISL> hpux -i3 (;0)/hp-ux.old
```

### Listing Files from the ISL> Prompt

When there is doubt about the kernel file in the root directory, you can list the files that are present:

```
ISL> hpux ls /
```

Look for evidence that this is the root file system. You should see the typical directories, i.e., */bin*, */dev*, and */etc*, and you should see the files */hp-ux* and */SYSBACKUP*. You can look for other files that you suspect are missing, such as:

```
ISL> hpux ls /etc/init*
```

### Problems in Logical Volume Manager

Series 800s can use Logical Volume Manager (LVM) as the method of disk organization and access. When LVM structures on the disk are incorrect, or when disks are not responding properly, the system can fail to boot. LVM error messages will indicate what type of problem is happening.

One requirement of LVM is that more than half of the physical volumes be present and responding. If not enough are available, the boot will fail this “quorum” test. There is a special boot option, *-lq*, that allows the system to ignore the LVM

quorum. This boot option is used at the ISL prompt, like the *-is* option for single-user mode.

Boot from the primary path and interact with IPL:

```
ISL> hpux -lq (;0)/hp-ux
```

Once the system is up, you can pursue problems on individual disks.

Another possible problem involves the Boot Data Reserved Area (BDRA) and the LABEL file. Each time you change the configuration of the root volume group, both should be updated. You can update them with the following command, assuming default names:

```
# lvlnboot -R /dev/vg00
```

If there has been a change to the root volume group, and the BDRA or LABEL file has not been updated, the next boot may fail with “could not configure root VG.” The special boot option *-lm* allows the system to boot in LVM maintenance mode.

Boot from the primary path and interact with IPL:

```
ISL> hpux -lm (;0)/hp-ux
```

When the system comes up, you will have to activate the root volume group, update the BDRA and LABEL file, and reboot:

```
# vgchange -a y /dev/vg00
# lvlnboot -R /dev/vg00
# reboot
```

An important LVM backup function that is often overlooked is the *vgcfbackup(1M)* command. It backs up a volume group configuration from the physical volume to the file */etc/lvmconf/<vg-name>.conf*. If you lost one or more logical volumes, this file could be used as input for the command *vgcfrestore(1M)*. It would recreate the LVM structures on the disk. Next you would recreate the file systems and restore files. Lacking this backup file, you would have to recreate the volume group from scratch, and the only way to do that for *vg00* is to reinstall! The backup command should be done for each volume group after any change to the volume group:

```
# vgcfgbackup /dev/vg00
```

## Fatal Error in Boot Area or File System

### *The HP Support Tape*

When the root drive is unbootable, there are still many options left to try. The one we use most often when giving help from the Response Center is the HP support tape (or CD-ROM). This tape was originally developed by the HP Customer Engineer Organization as a hardware support tool. It was not intended to be used by customers, even during Response Center telephone help. On the other hand, we think it is the best tool available, so we use it.

The support tape is available for 700s and 800s. It is shipped with each order of software media, but many "Instant Ignition" systems (software already installed on the disks) are sold these days without software media. It is critical that software media also be purchased, so that it is possible to reinstall or recover from unexpected disasters.

The support tape is bootable. It contains a minimal kernel and a number of useful utilities. While booted from the support tape, "/" refers to the support tape's root directory, which is managed in main memory. Although there are many files available on the tape, only a few are loaded into this memory-based root file system, because of the limited space. You may load additional files as needed, subject to the space limitations. The *ls* command, for example, is not present unless you load it, because it is very large. We use *echo \** as a substitute. There are some automatic recovery options available, but I generally do not use them. I prefer to use manual techniques to change only those things that need to be fixed.

The general approach is to boot, then escape to a shell. From there, we attempt to mount the root disk under a mount point such as */mnt1*. Sometimes the disk file system has to be fixed with *fsck(1M)* before it can be mounted. It takes some expertise and experience to know what device file name to use in referring to the root disk. Remember, at this time the */dev* directory we are using is the one that came from the support tape, and the device file names may not match the names you are accustomed to using.

Once the root disk is mounted, we may need to change our point of view to the root disk using the *chroot(1M)* command (change root). Then it is possible to fix a number of faults that may be responsible for the failure to boot. We can fix a defective boot area, where the loader utility resides, with the *mkboot(1M)* command. We can get a new kernel if needed using normal procedures. Sometimes we have to fix permissions,

create device files, edit scripts or configurations, or restore files from a backup. If this can be done successfully, the final step is to reboot with default options from the root disk.

Before beginning any repair, it is good to verify that the damage does not extend further than is feasible to repair. It is terribly disappointing to hack through the repair of one file only to discover that all the other files are missing.

### *Support Tape Examples*

The following is an example of the steps to boot the support tape on a 700 at 9.01 and repair the boot area of the root disk:

1. Boot from the tape device to the ISL> prompt, using the *ipl* parameter, then boot the support system:

```
b p2 ipl (assuming that the tape drive is listed as p2
in the search for potential boot devices)
```

```
ISL> support
```

2. When the support tape menu is displayed, choose "load a file." When prompted for what files to load:

```
ls chroot
```

3. When the files are loaded, return to the menu and select "exit to shell" to mount the root disk (*/mnt1* is already provided as a mount point).

```
# mount /dev/dsk/c201d6s0 /mnt1 (assuming the
root disk is on single-ended SCSI, address 6)
```

If *fsck* is needed, run it; then redo the mount command:

```
# fsck -y /dev/rdisk/c201d6s0
# mount /dev/dsk/c201d6s0 /mnt1
```

Inspect to see if it looks like a root file system:

```
# ls /mnt1/*
```

4. Switch to the disk file system and rebuild the boot area:

```
# chroot /mnt1 /bin/sh
# /etc/mkboot /dev/rdisk/c201d6s0
```



5. Switch back to the memory-based support menu:

```
# exit
# menu
```

6. Choose reboot from the menu, and let it boot as normal.

The following is an example of the steps to boot the support CD-ROM on an 800 at 9.0 and gen a new kernel:

1. Boot from the CD-ROM drive and interact with ipl, to the ISL> prompt.

```
ISL> supported
```

When the boot is nearly completed, watch for it to display the device file name of rootdev. It scans disk devices from low SCSI addresses to high, assigning lu numbers starting with zero. If you have three SCSI disks, use lvm, and the root disk drive is at address 6, the device file name will be `/dev/dsk/c2d0lvm`.

2. When the support tape menu is displayed, choose "exit to a shell", and make a mount point. (Command files will be available from the CD-ROM without loading them, because the CD-ROM is mounted automatically.)

```
# mkdir /mnt1
```

3. Fdisk if necessary; mount the root disk and inspect as above.
4. Chroot as above. Use normal commands to gen a kernel and move it to `/hp-ux`.
5. Run exit, menu, and reboot as above.

### The Recovery Tape

The recovery tape is the other kind of bootable tape that can be used. It must be created by the user on Series 300s, 400s, and 700s, using the `mkr` command. Depending on the kind of fault that prevents a normal boot, the recovery tape may be useful in fixing the fault, particularly on versions 9.0 and later. On the other hand, we find that the auto-recovery feature requires some manual steps that are not clearly documented. It copies a predefined set of files from the tape back to the disk, putting them in the `/tmp` directory, in a subdirectory named `recovery.<mmdd>`. It is necessary for you to copy these

files back to the regular places they belong. It is possible to escape to a shell and execute manual procedures, but there are fewer capabilities than on the support tape. Also, it is critical that you create a new recovery tape each time the system is modified in any way, including each time the kernel or critical configurations are changed. If you are depending on the recovery tape to save you from a disaster, it is highly recommended that you find a way to test it first in a non-critical environment.

Based on preliminary information, HP-UX 10.0 will have improvements in the recovery tape and support tape strategies. It will be worthwhile to check the details when they become available.


### Diskless Clusters, a Special Bonus

There may be one more alternate boot possibility that already exists and is ready for you to use—a diskless cluster server. In HP-UX 9.0, diskless cluster software is available for 300s, 400s and 700s. It enables client systems to boot over the network from the server's root file system. The original idea was to save the costs of disk drives for the clients. This advantage is disappearing these days as disk costs are shrinking. Another standard advantage is that system administration can be centralized on the server and this is probably the biggest reason for using diskless clusters today. A third advantage is often overlooked: cluster servers can provide redundancy for booting.


In many ways, booting a problem system from a cluster server is better than using the support tape. You have the advantage of running a full-sized kernel and a complete file system, with all UNIX capabilities available. Once booted from the server's disk, you would use the same repair procedures as in the support tape section above.

If a cluster client has trouble booting and the server is OK, then it is possible to log in on the server and manipulate the client's files. If it is the server that will not boot, redundancy depends on having a least one more server. You can configure each server as a client on a different server. If the problem system is a stand-alone system, and you have a diskless server available, you can temporarily configure the problem system as a client.

All members of the cluster must be on one "local LAN segment." Repeaters, hubs, and bridges between members are

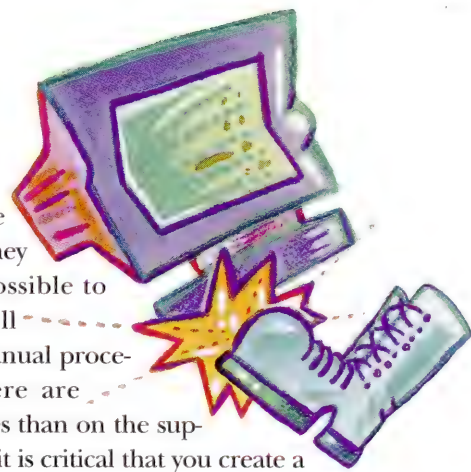

# DLT Exclusive!

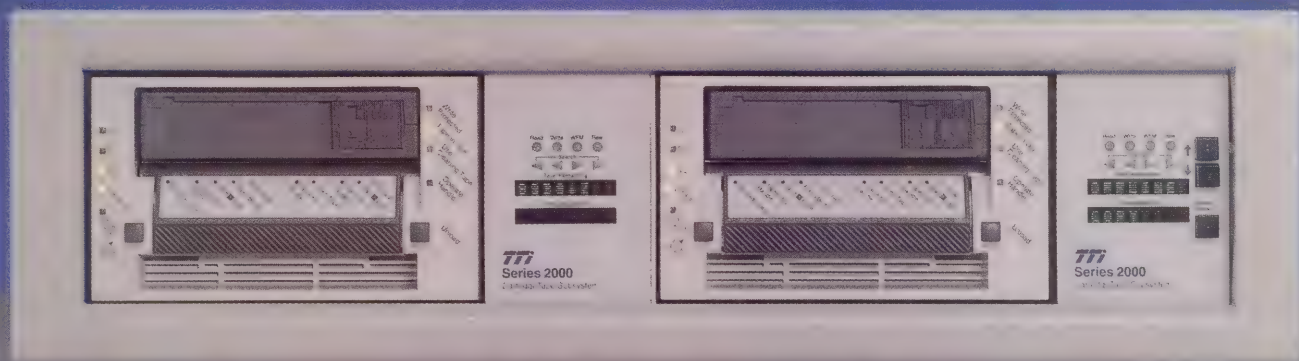


**Mirroring Mode**  
allows you to write the  
same data to both  
drives simultaneously.

**Off-line Copy**  
lets you copy the contents  
of one tape to another  
without host involvement.

**Cascade Mode**  
automatically writes data  
to the second tape when  
the first tape is full.

**Independent Mode**  
lets you operate each  
drive independently.

## Mirroring, cascading and off-line copy only in DLT drives from TTI.



When you need to make backups fast, look to the company that makes the fastest backup! TTI's new CTS-2119 dual drive DLT subsystem backs up 20 gigabytes native or 40 gigabytes compressed, with transfer rates up to 5 megabytes per second. But blazing speed and high capacity are just the beginning.

Independently or as a team, two DLT drives can tackle your workload better than one. Need a copy for off-site storage? With the CTS-2119, you can either make it when you do your backup or do it later off-line. This feature alone can cut your workload in half and dramatically improve system availability.

Need to backup more than 20 gigabytes unattended? Just select cascade mode and store up to 40 gigabytes without a tape change. But the features don't stop there. With a menu-driven front panel, you can select from an extensive list of options including host support, SCSI ID, compression and density selections. Your investment is protected by allowing you to choose from a long list of supported host computers, including DEC, Sun, IBM AS/400 and RS/6000, SGI, HP and more. Need to move to another platform? No upgrade required! Simply select the new host from the menu.

Host software doesn't support DLT? No problem. Our DLT can emulate a number of drives, including 8mm, DAT and others. Last, but not least, a multi-segment LED display keeps you updated with the current tape status, including tape remaining, operation in progress and tape condition.

Why settle for ordinary tape backup when you can have extraordinary? Call TTI for complete information on the CTS-2119.

**TTI** TRANSITIONAL  
TECHNOLOGY, INC.

**(714)693-1133**

FAX: (714) 693-0225  
E-mail: [info@ttech.com](mailto:info@ttech.com)





OK, but gateways and routers are not. This is because communication is based on link-level addresses rather than IP addresses.

It is very easy to change a cluster server's configuration to add a new client. It takes a bit more effort if the problem system has to be moved so that it can be attached to the server's local LAN segment. You might physically move the problem system next to an existing client, and then temporarily borrow that LAN connection.

It would take considerably more time if the cluster server was not already in place. You would have to install cluster server software using *update(1M)*, then configure both the server and the client. If you are not already familiar with clusters, you may not want to undertake this task in an emergency. However, it is a feasible technique, and sam does a good job with the configuration.

Based on preliminary information, there will be significant changes in HP-UX 10.0. Instead of HP's proprietary diskless cluster software, diskless capability will be provided as part of nfs. Support will be added for Series 800s as servers, but not as clients. IP addressing will be used, so a cluster will not be confined to a local LAN segment. One hop over a gateway or a router will be permissible.

### ***Spare Root Disk Drive***

The larger your organization, the easier it may be to plan your boot alternatives. If you have many systems, it may be cost-effective to prepare a spare root disk drive. It should be an external disk with the operating system fully installed. It would be handy if you could set the disk's address to one not used on any of the systems. It could sit on the shelf like an insurance policy, ready to attach to whichever system might need it. Boot from it, and fix damaged files as above.

A good choice for an external drive is a magneto-optical read/write disk. Since the media is removable, you could have several versions of the operating system, each on its own platter. You could also use the drive for many other purposes.

At the Response Center, we often need to test situations on any one of many currently supported HP-UX versions, so we install different versions to different disks on the same system. The leftover space on each disk is available for user data. We boot whichever version is needed, and mount all the other disks as secondaries. It was not our original purpose, but we also get boot redundancy this way. You can plan this for yourself by installing the smallest possible system to a secondary

disk, to be used in case of disaster on the root disk.

In your plan, the "spare" root disk drive might be a root drive you can borrow from a different system. It would be easiest if the drive were in an external cabinet, but this is not necessary if you have the hardware expertise to rearrange internal disk drives. Alternatively, you could take the bad drive to a different system, where it could be attached as a secondary drive.

Before physically rearranging disks, there are some important cautions about the rules of SCSI buses. No changes should be made while the system is powered up. Shut down and power off the system first, then power off all peripherals on the SCSI bus, and only then make any cabling changes. Reverse the sequence to power up. If these rules are not followed, it is possible to corrupt data on the disks. Also, be sure to avoid any duplicate SCSI addresses, which are another possible cause of data corruption.

### ***Reinstalling Software***

Doing a reinstallation might be part of your plan, rather than the last resort. You could install a minimal system to a disk other than the root disk, boot the minimal system, and attempt to save the root disk. You might use any available disk for this purpose, even one that has necessary data, if you first back it up before using it for the install.

You could organize your disk environment so that reinstalling on the root drive is quick and harmless. Considerations might include:

- keeping only HP-supplied installed directories on the root drive, and all user data on secondary drives
- being prepared to recreate or restore every file that was customized or configured for your operation
- being prepared to restore or reinstall all patches applicable to software in the reinstalled directories

In the case of customized files, you could store copies in a special directory on another disk, or back them up separately, for easy restoring. The difficulty is being sure that you have identified all the pertinent files that various products modify. It would be good to test this procedure to be sure all customized files are identified. In the case of patches, some program files and shared libraries may not be replaceable by restoring, because they are in use. You can replace them if booted from another source, but that defeats the purpose of this approach. Reinstalling the patches may be easier.

### **Unsupported Boot Devices**

HP will support systems that were installed from HP media using the standard install procedures. You may use other handy procedures, like the ones following, if you do not require HP's support for it.

**Creating a bootable backup (Series 700s).** A bootable backup tape, as used on an HP 3000, would be a very handy thing. Unfortunately, the only technique I have ever heard about is considered an unsupported one. On the other hand, it is listed in the man pages under *hpux\_700(1M)*, restore option. Also, it was supported to the degree that patch PHCO\_3927 was issued to make it work in 9.03.

To copy a boot area to a tape, and then copy the root file system (assuming standard tape and disk configuration):

```
# dd if=/usr/lib/uxbootlf.700 of=/dev/rmt/0mn bs=2k
# sync
# sync
# dd if=/dev/rdisk/c201d6s0 of=/dev/rmt/0m bs=64k
```

To boot from the tape and restore the entire root disk after a disaster:

Boot from the tape device to the ISL> prompt, using the ipl parameter, then boot the tape system:

b p2 ipl (assuming that the tape drive is listed as p2 in the search for potential boot devices)

ISL> hpux restore disk(SCSI.6;0)

A number of cautions are required. The disk you copy to should be the same model disk that you copied from. A fresh backup has to be made any time there are changes affecting this disk. The *dd* command does not handle I/O errors, so if I/O errors occur, the results will be unpredictable and incomplete. The restore is not capable of spanning two different I/O controllers, such as a differential SCSI disk and a single-ended SCSI tape.

**Creating a bootable disk.** The following is an unsupported technique for creating a bootable disk. It could be useful on hardware such as a magneto-optical disk drive. This procedure was written for 700s by an engineer of the Belgium Response Center, with minor changes by me. It could be adapted for Series 800s.

Initialize the disk:

```
# mediainit -v /dev/rdisk/mo
```

Create a file system with 32 MB of swap:

```
# newfs /dev/rdisk/mo hpS6300.650A_32MB
```

Make the MO disk bootable:

```
# /etc/mkboot -v -u /dev/rdisk/mo
```

Mount the disk and copy the root file system:

```
# mount /dev/dsk/mo /mo
# find / -depth -hidden -xdev |
> cpio -pvdxulm /mo &
```

Modify */mo/etc/checklist* so it properly describes the disk drives that will be present when the mo is booted.

### **Conclusion**

The lengths to which you are willing to go to repair a damaged root drive will depend on the value of the data you can save. Regular backups are the usual indicator of valuable data, but that value should also influence the investment you make in disaster planning. ■

---

*Dennis McClure is an HP Response Center engineer in Atlanta, Georgia, where he has provided help on downed systems since 1984. He was a founding member of the HP 3000 System Interrupt Team, and is now working on HP 9000s.*



# Encina/9000

by Paul Wang

Encina/9000 provides an open distributed on-line transaction processing (OLTP) environment that ensures data/transaction integrity across multi-vendor platforms, operating systems, and databases. Its flexible, modular, client-server design simplifies the construction of reliable distributed applications. This interoperability is achieved by adherence to standards such as Open Software Foundation's (OSF) Distributed Computing Environment (DCE) and X/OPEN's Distributed Transaction Processing XA interface. It is based on technology licensed from Transarc Corporation that has been tuned and enhanced for HP 9000 Business Servers and workstations.


Encina/9000 consists of Client, Server, Structured File System (SFS), Recoverable Queuing Service (RQS), Peer-to-Peer Communication (PPC) Executive & Gateway, and Monitor. In terms of the transaction processing monitor, users have a choice between the Encina/9000 monitor and the CICS/9000 monitor, which are both implemented on top of the Encina/9000 server component.

Encina is the first and most complete transaction processing system built on top of OSF's DCE and X/OPEN's XA. This is of critical importance for building open distributed client-server OLTP applications.

DCE provides a common platform (a consistent set of services) for developing and deploying distributed applications. Those services include remote procedure call (RPC), directory naming, time, security, threads, and a distributed file system. RPC is the natural choice for the client-server paradigm. It simplifies the development of distributed applications by providing a formal specification of the interface between clients and servers. Programmers on either the client or server side are free to code to that specifica-

tion without concern for managing network connections, message packing and unpacking, and the complexity of the network. In addition, RPC integrates directory and security services so that servers can be dynamically located, clients and servers can be authenticated and authorized, and messages can be encrypted. DCE is available on many platforms including HP-UX, HP MPE/iX, IBM AIX, IBM MVS, DEC VMS, SUN Solaris, Microsoft Windows, and Microsoft NT. As a result, OSF's DCE is the best approach for achieving open enterprisewide client-server computing, particularly for large-scale heterogeneous configurations.

The X/OPEN Distributed Transaction Processing standard allows distributed OLTP applications and databases to be interoperable and maintain data integrity (see *Figure 1*). The application invokes the transaction manager to issue transactions. The application invokes the resource manager (i.e., databases) directly with data access operations. Finally, the transaction manager communicates with resource managers to define thread context and



to flow the two-phase commit protocol to preserve data integrity. XA is the interface between transaction manager and resource manager. XA has wide industry endorsement. Popular relational databases such as Oracle, Informix, Sybase and ALL-BASE all support XA. As a result, building distributed OLTP applications with XA allows users to mix and match any XA-compliant database without being locked in to any specific database. In addition, it allows transaction data integrity across heterogeneous databases.

Encina/9000 also provides mainframe interoperability with support for the IBM LU 6.2 protocol with full Sync Level 2 over SNA and TCP/IP. LU 6.2 is the mainframe OLTP de facto standard. This service allows Encina applications to access and update data transactionally on mainframes. Similarly, mainframe applications can be off loaded to Encina systems.

Encina/9000 is part of HP's strategic distributed OLTP direction (see *Figure 2*). DCE/9000 and Encina/9000 provide an excellent foundation for distributed OLTP applications. To ease the development, execution, and administration of distributed OLTP applications, users may want to utilize a transaction monitor. HP offers a choice between the Encina/9000 monitor and the CICS/9000 monitor, which are both implemented on top of the Encina/9000 server component. For users offloading existing CICS applications or leveraging existing CICS investment and exper-

tise, the CICS/9000 monitor is a good choice. On the other hand, for users developing new applications, the Encina/9000 monitor is the way to go.

Encina/9000 consists of the client component, a server component, and extended services (see *Figure 3*). The architecture is highly modular and flexible. Users can mix and match the configuration best suited to their OLTP environment.

### **The Client Component**

The Client component provides facilities to define distributed OLTP applications, including transaction demarcation, transactional remote procedure call (TRPC), distributed two-phase commit, and multi-threading support (see *Figure 3*). It consists of four elements: Transactional C, Transactional RPC, Distributed Transaction Service, and Base Development Environment.

#### **Transactional C**

Transactional C is a set of macros and library routines for ANSI C. It allows users to define transaction demarcation and to integrate exception handling. For example, a transaction can be defined by the keywords "transaction" and "onAbort." The transaction clause defines a single unit of distributed work that is atomic, consistent, isolated, and durable (transaction ACID property). The onAbort clause defines exception handling, which traps any errors resulting in transaction abort.

#### **Transactional RPC**

Although DCE RPC provides network transparency with name and security integration, it alone is not suitable for transaction processing. If an RPC fails, the client has no idea if the server ever finishes the request or if the return message is lost. In fact, the request might be sent to the server more than once because of retries.

Transactional RPC is based on top of RPC. It guarantees the "exactly once" semantics for request. In addition, if a transactional RPC fails, the encompassing transaction is aborted and all participants of the transaction will roll back any local or remote modifications.

#### **Distributed Transaction Service**


The distributed transaction service provides the two-phase commit protocol. The transaction state information is passed transparently via the transactional RPC mechanism.

The two-phase commit protocol guarantees all participants of a distributed transaction either to all commit or all abort their work. One participant is the coordinator. During the first phase, the coordinator polls all the participants to prepare the commit. If all participants agree, the commit decision is yes; otherwise, it is no. During the second phase, the coordinator informs all participants about the decision and commits or aborts the transaction accordingly.


Once a participant prepares to commit, it must disallow access to the relevant



**FIGURE 1** *X/OPEN Distributed Transaction Processing Architecture*

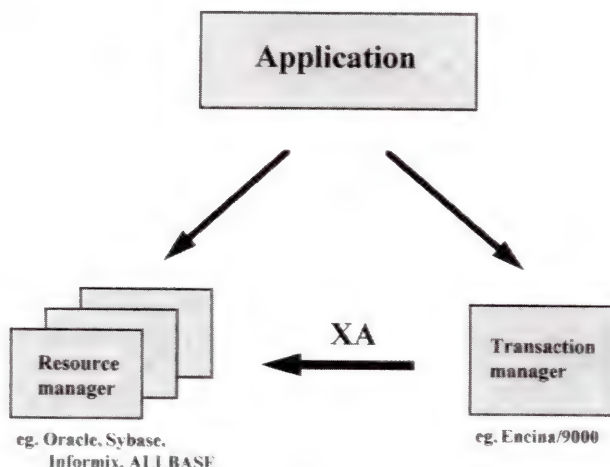

**FIGURE 2** *HP Distributed OLTP Direction*

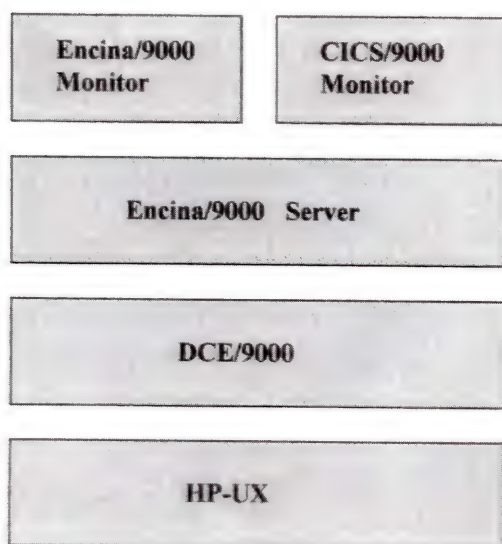

data (i.e., locking) so that it can commit or abort the work pending the outcome of the coordinator. If the coordinator (or the communication link to it) goes down, the data will be locked out until the coordinator is available. This is the vulnerable window for the two-phase commit protocol. Please note that data is still consistent; however, it might not be available until the coordinator comes back. In addition, if the coordinator goes down before

a participant is prepared, the participant may abort its work without waiting. This optimization is known as "presumed abort."

To minimize the window of vulnerability, the distributed transaction service supports coordinator migration and heuristic outcome. Coordinator migration transfers the role of coordinator from a client to a more reliable server automatically. As a result, coordinators

are less likely to go down (for example, rebooting a PC or workstation). In addition, clients without logging facilities (such as a diskless PC or workstation) may begin and commit transactions. Heuristic outcome allows users to force the outcome of the blocked transaction in order to make the data available.

Finally, the distributed transaction service also supports nested transaction. A nested transaction is a transaction within a transaction. The outcome of the nested transaction does not affect the outcome of the parent transaction. On the other hand, the outcome of the nested transaction is relative to the parent transaction. If the parent transaction aborts, the work of the nested transaction is rolled back even if it commits. This is useful for multi-threaded applications and failure isolation. For example, a nested transaction may be employed to allow participants to isolate locally and recover from failures without affecting the global transaction outcome.

### **Base Development Environment**

The base development environment is the lowest layer of Encina. It isolates all the operating system dependencies from the rest of the product. This allows Encina to be easily portable to various platforms. Only the base development environment needs to be modified.

### **The Server Component**

The server component provides facilities to manage recoverable data with transactional integrity. This allows users to build their own databases or resource managers. Alternatively, users might find it more convenient to use existing extended services, which are built on top of the server component, such as the Encina monitor, the CICS monitor, RQS,

and SFS. The server component includes the client component. It also consists of five additional facilities: Lock service, Recovery service, Volume service, Log service, and XA service (see Figure 3).

#### Lock Service

The lock service provides read, write, and hierarchical intention locks. Locks are transactional so that they are held until the transaction commits or aborts.

#### Log Service

The log service provides a distributed common log facility to store transaction outcomes and update images of recoverable data. Many applications may share the same log physically, and logically they see only their own log records. In addition, flexible archiving allows separate crash recovery (e.g., system failures) and media recovery (e.g., disk crashes).

#### Recovery Service

The recovery service provides recoverable data undo/redo logic. It is achieved by logging before images and after images of data updates to the log via the log service. By replaying the log, recoverable data may be rolled forward or rolled back according to the outcome of the transaction after a system failure.

In order to guarantee recoverability, the log is flushed in such a way that no dirty data can go to disk before its associated log record goes to disk. This is called write-ahead logging. In addition, log records are flushed right before transaction commit with the commit record to ensure the commit is durable.

#### Volume Service

The volume service is similar to the Logical Volume Manager (LVM). It allows files and file systems to span

HP RENTALS
HP RENTALS
HP RENTALS
HP RENTALS

# HP WORKSTATION RENTALS



## WORKSTATIONS

755	750	CRX	433 S	CRX	382	360	332
735	730	CRX-24	425 T	VRX	362	350	330
725	720	CRX-24Z	425 S	GRX	380	345	320
715	710	CRX-48Z	425 E	PVRX	375	340	310
712	705	GRX	400 S/T	EVRX	370		

## AND MORE . . .

Printers  
Plotters

X Terminals  
APOLLO DN Series

PC's  
Memory

Discs  
Test Equipment

800 Series  
Data Acquisition

TSA is THE place for daily, weekly, monthly or long term rentals of Hewlett-Packard equipment. Ask about our 6-12 month purchase plans. Equipment available for same day shipments!



# 1-800-422-4872

713/935-1500 • Fax 713/935-1555 • Email: info@tsa.com





Authorized  
Rental  
Company




2040 West Sam Houston Parkway N. • Houston, Texas 77043

HP RENTALS
HP RENTALS
HP RENTALS
HP RENTALS

CIRCLE 143 ON READER SERVICE CARD

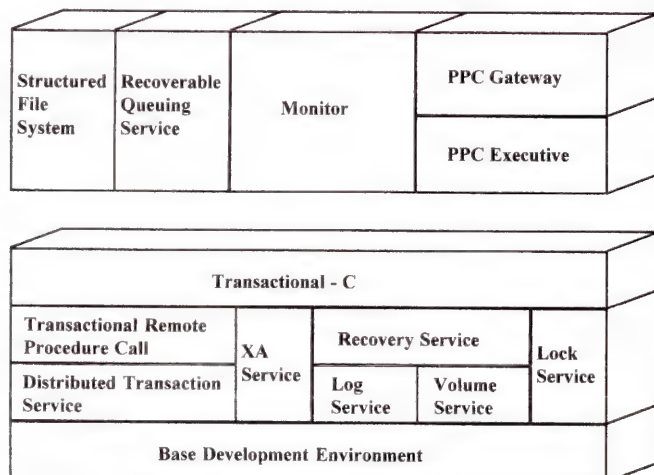

**FIGURE 3** *Encina/9000 Architecture*

multiple disks. It also supports mirror disks.

#### XA Service

The XA service provides transactional access to X/OPEN XA-compliant resource managers.

#### Extended Services

The extended services are OLTP products built on top of the server component. They include a monitor, structured file system, recoverable queuing service, and peer-to-peer communication service (see *Figure 3*). Users might find it more convenient to use existing extended services, rather than trying to build their own systems from the ground up. Users can also mix and match the configuration best suited to their OLTP environment.

#### Monitor

The monitor offers a complete environment and solution for open distributed OLTP to develop, execute, and administer Encina-based applications. It also hides and handles many details

of DCE to ease DCE programming and administration.

In addition to the services provided by the client and server components that are available to users, the monitor further includes support for connecting front-end tools, binding clients to servers, and building integrated systems (for example, shared memory support for servers, diagnostic reporting, and audit trail construction). The monitor supports various front-end tools and 4GLs. In particular, OSF's MOTIF and JYACC's JAM are supported. JAM is a widely available WYSIWYG form editor that supports OLTP application construction without any "programming" by attaching an exit action (an interpretive TRPC) to a particular field or form.

The monitor execution environment provides support to ensure availability, performance, and security. It extends the transparent binding feature of DCE RPC to automatically perform load balancing across replicated instances of a server and to reroute work when a server fails. If a server or a node goes down, it can be restarted

automatically. The monitor enhances security by protecting each server with centrally administered access control lists to prevent invocation by unauthorized clients. In addition, it provides application isolation so that only one client is active within a server at a time, reducing the possibility of interference.

The monitor provides centralized administration so that an authenticated administrator has access to a coherent view of the entire distributed OLTP system from anywhere in the environment. The administration includes configuration management, system monitoring, security administration, and performance management. In particular, users can monitor active clients, server availability and load, client authorizations, exception conditions, auditing information, performance information, etc. Moreover, configuration management provides startup, graceful shut down, and migration of servers in a distributed environment. Many services can be automated and replicated as well.

#### Structured File System

The structured file system (SFS) provides a record-oriented file system with transactional integrity and support of ISAM and VSAM API. SFS supports entry sequenced, relative, and B-tree clustering file organizations. It also supports multiple secondary indices and a range of locking strategies. In addition, National Language Support is included so that multi-byte characters and collation sequence can be handled.

#### Recoverable Queuing Service

The recoverable queuing service (RQS) provides a transactional priority queue that is durable for system failures and media failures. Since enqueue and

dequeue operations are part of transactions (two-phase commit), queued messages are always consistent and reliable. This is a very powerful service to increase application flexibility, performance, and availability.

Rather than waiting for all the associated tasks to be completed in a two-phase commit (some tasks might be over a wide area network), RQS can also boost performance (reducing response time) by transactionally enqueueing some tasks for later processing. In addition, those tasks can be processed in batch during off hours.

It can also increase application availability and resiliency against failures. Rather than aborting a transaction or denying a request if some servers are not up, RQS can enqueue task requests for later processing.

With multiple priority levels, RQS can be used to schedule a set of servers so that urgent tasks are always handled first.

#### Peer-to-Peer Communication Services

The peer-to-peer communication (PPC) service supports the IBM LU 6.2 protocol with full Sync Level 2 over SNA and TCP/IP. LU 6.2 is the mainframe OLTP de facto standard. This service allows Encina applications to access and update data transactionally on mainframes. Similarly, mainframe applications can be offloaded to Encina systems. This service provides interoperability with proprietary mainframe systems.

The PPC service consists of PPC executive and PPC gateway. PPC executive implements LU 6.2 over TCP/IP. In addition, it supports API for LU 6.2, CPIC (Common Programming Interface—Communications), and CPIRR (Common Programming Interface—Resource Recovery). PPC gateway provides trans-

actional interoperability over an SNA implementation of LU 6.2. In fact, with Sync Level 2, LU 6.2 OLTP systems (such as CICS) can coordinate or be coordinated by Encina systems.

#### Conclusion

Encina/9000 provides an open distributed on-line transaction processing (OLTP) environment that ensures data/transaction integrity across multi-vendor platforms, operating systems, and databases. Its flexible, modular, client-server design simplifies the construction of reliable distributed applications. It also provides interoperability and two-phase commit data integrity among IBM mainframe OLTP systems and XA-compliant databases, such as Oracle, Informix, Allbase, and Sybase.

In the transaction processing marketplace, Encina/9000 is unique in its support of standards (for example, DCE and XA), modern programming paradigms (for example, multi-threading and RPC), and advanced technologies (for example, nested transactions and LU 6.2 interoperability with full sync-point). As a result, it is an excellent choice for open distributed OLTP. ■


*Paul Wang, president of SolutionSoft Systems, Inc., is a consultant specializing in transaction management, system performance, file system internals, databases, and on-line transaction processing. Previously, he was a member of the Encina/DCE team and the system architect of transaction processing in HP's Cooperative Computing Systems Division. He can be reached at paulwang@netcom.com.*

## RAID For HP! NOW!

**Not all RAIDs are equal.  
Some do work with HP/UX,  
Some Don't!**

HP/UX sets disk partition limits that make most RAID products difficult and expensive to use.

Co Comp's OMNIVAULT Storage Array offers HP/UX users high-powered RAID. By using HP's powerful disk striping utility with OMNIVAULT, you get fault tolerant RAID today!

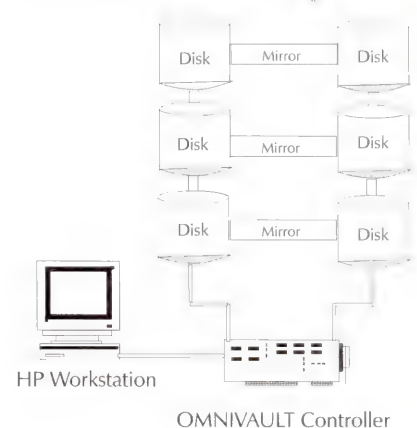

Capacities range from 4.0 GB to 20 GB per system. Hot swap cabinets make maintenance a snap.

**Want to know more?  
Call Co Comp Today!  
1-800-873-0247**



**Co Comp, Incorporated**  
111 East Drake Road, Suite 7038  
Fort Collins, CO 80525  
FAX: (303) 482-2913

CIRCLE 154 ON READER SERVICE CARD



## syslogd

IF YOU'RE LIKE ME, you use *cron* and *at* to execute custom scripts at all times of the day to assist you with your administration tasks. If you do, then you also know about getting e-mail after each script finishes to inform you of the current system status. I know that I get about 10 messages each morning from scripts that were completed overnight and almost always they inform me that everything went great, but you still have to read them!

Well, in this column I'll describe *syslogd* and point to some ways of using it to automate recording the statuses of your scripts and your system in general. What is *syslogd*?

*syslogd* is a daemon that is a standard part of HP-UX and of almost all other versions of UNIX that have any BSD heritage. In general it is a message-routing daemon. Used mainly for subsystems within HP-UX, it provides a very simple API (Application Programming Interface) that allows you to use it with your own applications. A configuration file defines the messages being monitored and the programs or groups of programs that generate them.

*syslogd* is configured by using an ASCII configuration file. The default location is */etc/syslog.conf*. The configuration file is made up of selector-action pairs. The selector defines what is being monitored and the action defines what happens when one of the monitored events occurs.

A selector is divided into two parts: the facility and the level. The facility is the application or group of applications that is generating the message and the level is an indicator of how severe the message is. Using this convention, it is possible to route specific messages to a log file instead of having to look at every message to catch something.

The facilities are defined as follows:

LOG_KERN:	Messages generated by the kernel
LOG_USER:	Messages generated by user processes (User processes are defined as any process not listed as a default facility or not using one of the available LOG_LOCAL facilities.)
LOG_MAIL:	Messages from the mail system
LOG_DAEMON:	Messages from standard HP-UX daemons such as <i>inetd</i> and <i>ftpd</i>
LOG_AUTH:	Messages from the authorization system such as <i>login</i> , <i>su</i> , <i>getty</i> and <i>uugetty</i>
LOG_LPR:	Messages from the print spooler system
LOG_LOCAL0:	
LOG_LOCAL1:	
LOG_LOCAL2:	
LOG_LOCAL3:	
LOG_LOCAL4:	
LOG_LOCAL5:	
LOG_LOCAL6:	
LOG_LOCAL7:	Local programs, including customer-written applications and scripts

The levels are defined as follows:

LOG_EMERG:	A panic condition
LOG_ALERT:	An important condition that needs to be addressed immediately
LOG_CRIT:	A critical condition that needs to be addressed immediately, but not nearly as bad as the LOG_ALERT case
LOG_ERR:	General errors, usually not affecting system integrity
LOG_WARNING:	Informational warnings, usually to draw attention to a problem or inconsistency before it gets out of control or fails
LOG_NOTICE:	Informational warnings, more of the type “Hey, you might want to look at this if you get a chance.”
LOG_INFO:	Informational messages, usually to let you know what the system is doing
LOG_DEBUG:	Messages that are useful only during debugging of an application

The syntax of the configuration file allows you to remove the LOG\_ from both the facilities and the level and change the case on the remaining part to lowercase for better readability. For example LOG\_EMERG can be used simply as *emerg*.

The syntax of a selector is:

```
facility[,facility].level
```

The *[,facility]* syntax indicates that you can define one or more facilities with the same level by separating them by commas and adding the level only to the last one. For example:

```
local0, local1.err
```

defines a selector that is satisfied by both local0 and local1 errors.

Likewise one selector can consist of several other selectors. For example:

```
lpr.err;local0,local1.warning;kern.alert
```

is one selector that is satisfied by errors from the line printer system, warnings from the local0 and local1 systems, or alerts from the kernel. The semicolon is used as the separator for selectors.

The syntax also allows the use of the asterisk ‘\*’ to define all facilities with a single level. For example the *\*.warning* selector is satisfied by warning messages from any of the facilities. The final special case is the *none* level. The *none* level can be used explicitly not to log messages from a facility. For example

```
*.err;mail.none
```

logs all messages at level *err* or higher unless they come from the mail facility.

You’ll notice in the last sentence I said “or higher” when describing what *\*.err* means. *syslogd* assumes that if you are interested in a message from a facility at one level, you will also be interested in any messages of a higher severity that occur. Thus *\*.err* means that you are interested in any message from any system with a level of LOG\_ERR or higher. The order of severity is from LOG\_DEBUG at the lowest to LOG\_EMERG at the highest.

## LOG\_LOCAL Facilities

The LOG\_LOCAL facilities are designed for use by the local system for whatever applications you choose. This means that you can have all your custom-written scripts and programs generate messages into one file instead of having a specific log file for each; instead of getting a dozen e-mail messages to check, you get one.

Before you choose a local facility for your use, check if any third-party applications are using that facility. The easiest way to do this is to call the third party and ask. If you cannot do this, turn on the facility with a level of debug for a couple of days and see if anything happens. If not, it is pretty safe to assume that no one else is using the facility.

## Action Definitions

Now that we know what we can monitor with *syslogd*, what do we do with the messages when they occur? As I said earlier, each entry in the *syslog.conf* file has two parts: the selector and the action. The action can be one of the following:

- a fully qualified pathname to the file you wish to append the message to



- a hostname preceded by the @ character
- a comma-separated list of users who, if logged in, receive the message on their terminal windows
- an asterisk '\*'

The *fully qualified pathname* to the file is the most common and may include device files such as */dev/console*. If the file does not exist, it is not created. If the file does exist, it is opened in append mode and the message is written to the file.

The *hostname* action causes the message to be sent to the remote host's *syslogd* and reprocessed. The selector is not changed on the message that is transmitted.

The *list of users* action sends the message to those users if they are currently logged in. If you are like me, you are almost never logged in as root, so adding your name to the list will speed up problem detection.

The last action, the *asterisk*, causes the message to be sent to all users who are currently logged in.

It is important to separate the selector and the action with at least one tab. If a tab is not used, *syslogd* will ignore the entry.

*syslogd* does not try to prevent duplicate messages from being sent to an action. Thus, if you have two entries that are using the same action, but are triggered with different selectors with the same facility, you will receive two messages. For example:

```
local1.debug    /usr/tmp/local1.log
local1.info     /usr/tmp/local1.log
```

will generate two messages to */usr/tmp/local1.log* for each message at info or higher level.

## Starting *syslogd*

The *syslogd* daemon is started in the */etc/rc* file when HP-UX boots. The syntax for the *syslogd* command is:

```
/etc/syslogd [-f config file] [-m mark interval] [-d]
```

The *-f* option defines an alternative configuration file than */etc/syslog.conf*. The *-d* option turns on debugging of the daemon. The *-m* option defines an interval in minutes that *syslogd* will use to look for an entry in the configuration file that has *mark* as the facility. The default time is 20 minutes.

The mark facility will generate a time stamp message into the action associated with the selector. For example, an entry of

```
mark.debug /usr/adm/syslog
```

will generate a time stamp in the */usr/adm/syslog* file every twenty minutes (or the interval defined on the command line using the *-m* option).

After you change the configuration file, you can tell *syslogd* to re-read it by sending it a SIGHUP signal.

## Using *syslogd* in Your Own Scripts

The *logger(1)* command allows you to send your own messages to the *syslogd* daemon from your scripts. The *logger* command has the following syntax:

```
/usr/bin/logger [-t tag] [-p priority] [-i] [-f file] [message]
```

The *-t* option defines the heading of the message being sent to *syslogd*. If not supplied, the user name of the executor is used. The *-p* option defines the selector to be satisfied by this message. The syntax is identical to that defined above, except that the asterisk cannot be used and only one facility/level pair can be supplied.

The *-i* option includes the process id of the executor with the message. The *-f* option tells *logger* to log the contents of the supplied file instead of a supplied message. The message option is the text to log. If the *-f* option and the message are not supplied, the *logger* command will look for the message on its standard input.

For example, if I wanted to log the completion time of my nightly backup to the system logfile and assuming that *local1.info* satisfies the correct selector, the following will generate a message in the correct log file:

```
echo "Backup Completed" | /usr/bin/logger -t [BACKUP] -p local1.info
```

One comment about using *syslogd*: Remember that logfiles grow without bounds unless you clean them up. I recommend modifying your */etc/rc* to make copies of existing logfiles and trimming them if necessary on startup, or modifying SAMs utilities to do this for your custom files. Also, remember that *syslogd*

# STAY ON COURSE! WHILE WE DO THE MONITORING



Tired of checking in on weekends or nights to verify that your data center is running as planned, when you could be spending this time enjoying one of your hobbies. With JMS to schedule and control your batch jobs, and with Callback to monitor your system looking for critical conditions, you can better enjoy your free time knowing that if a problem does occur, you will be notified by phone or pager.

## CALLBACK SYSTEM DOWN DETECTOR AND JOB NOTIFICATION SYSTEM

Voice notification for:

- System hangs
- Job aborts
- Console messages
- Printer status
- Logon security
- Special job events
- Physical conditions
- Adverse temperature
- Power loss
- User requests
- Reply pending
- Spoolfile scanning

## JMS JOB MANAGEMENT SYSTEM

Automated control for the scheduling and execution of batch jobs with very flexible scheduling capabilities and dependencies. Easy to use, no command language to learn and no jcl changes. JMS is a multiple-CPU system that allows jobs to have dependencies across the network. Ad hoc streamed jobs may be incorporated to allow complete batch job control. **Leaders in tools for the "Lights Out Environment". Call us today for a free 30 day demo. MPE/XL or HP-UX.**

### Corporate Headquarters

3470 Pipebend Place, NE #120  
Salem, OR 97301  
Phone: (503) 585-0512  
FAX: (503) 585-1706

### International Sales Office

System Software Intl.  
Oakmoore Court  
Hampton Lovett  
Droitwich, Worcs.  
England WR9 0QH  
Phone: 44 905 79 4646  
FAX: 44 905 79 4505



CIRCLE 34 ON READER SERVICE CARD

will not create a file if it does not exist, so use *touch* to create the files after you have removed the old ones.

Now back to the original problem: All those e-mail messages. What I recommend doing is creating three entries in your */etc/syslog.conf* like the following:

```
local1.debug      /usr/adm/logfiles/local1.debug
local1.info       /usr/adm/logfiles/local1.log
local1.notice     /usr/adm/logfiles/local1.errors
```

Now modify all your scripts to use the logger command to generate LOG\_INFO, LOG\_WARNING and LOG\_ERR levels for the local1 facility, depending on the completion status of your scripts. Next, have a *cron* task the e-mail the */usr/adm/logfiles/local1.log* to you and your other administrators each morning (or every hour depending on your configuration). After the file is mailed, have the *cron* task remove the file and use *touch* to create a new, empty file.

You will now receive one mail message with all your statuses. If you want to receive only bad news, have the *local1.errors* file mailed instead of the *local1.log*

file. Also if you have multiple systems, you can use the hostname syntax on the action to funnel all the messages to one system. ■

*Chris Curtin, a software developer for Bradley Ward Systems, Inc. in Atlanta, Georgia, specializes in device driver development for factory automation on the HP 9000. He can be reached via e-mail at: [chris@bwilab3.atl.ga.us](mailto:chris@bwilab3.atl.ga.us).*



THIS COLUMN IS MEANT to introduce you to one of the most valuable resources available on the Internet—computer programs.

Programs are available to help system administrators administer their systems. Network monitoring programs and nifty utility scripts are only a few of the admin tools to be found. For software developers, compilers, editors, and debuggers are only a sampling of the available programs. In addition, a wide variety of games, utilities, and applications can be found all over the world through the Internet.

Some of the programs are posted in various Usenet newsgroups while others are simply referred to via mail postings on the Net. If you don't know how to download programs with ftp, read my article "Anonymous FTP Access" in this issue.

The following paragraphs briefly describe some of the software recently posted. I don't attempt to cover all the programs I've seen, just those items I thought other people might like (actually, they're software I thought I might want!). The software is categorized under the newsgroups in which I found the items. "Miscellaneous" means everything else (e.g., *comp.unix.hpux*, *comp.unix.aix*, etc.).

## ALT.SOURCES

Recently, a number of postings on the Net have had a commercial bent (that is, the postings were nothing less than advertisements). Many people accessing Usenet have been upset by this and have responded in ways they felt appropriate. Bill McFadden wrote and posted a program called *adcomplain* (Version 1.7), which composes and mails a complaint about inappropriate commercial use of Usenet.

As McFadden writes, "This was written in the belief that a single, concise message to the offending poster is the most appropriate way to complain. A message to his or her postmaster may also be warranted if the originating site prohibits such postings. Mail bombing (e-mailing megabytes of useless data) and public flaming (replying on Usenet, causing your complaint to be duplicated on every machine in the network) are discouraged."

Olaf Titz of Fachschaft math/inf, Uni Karlsruhe, FRG ([uknf@rzstud1.rz.uni-karlsruhe.de](mailto:uknf@rzstud1.rz.uni-karlsruhe.de)) submitted a password generator program, *pwgen*, based on an old program from *comp.sources.misc* (volume 5, issue 59). He enhanced it to support modern systems. This program makes sure that passwords chosen are random strings and not a user's child's name, or whatever.

Zondo Pillock of the UK posted a game (in six parts) called "Wander." It is a game "where you wander around the screen collecting treasures, solving puzzles and avoiding the nasty monsters." It's a new version of an old game called "wanderer." Wander is a curses (screen-oriented, non-graphic) program that has been tested on DECstations running ULTRIX and SGI Indigos running IRIX. It might be fun to convert it to run under HP-UX. You can reach Mr. Pillock at [zondo@hunting2.demon.co.uk](mailto:zondo@hunting2.demon.co.uk).

## COMP.SOURCES.MISC

*arg\_parse* was submitted by Paul Heckbert of Carnegie Mellon University. According to him, "*arg\_parse* is a subroutine for parsing command-line arguments. It is very easy to use, and yields a powerful, consistent command-line interface to programs. It supports argument conversion and type checking, arbitrary

# THE TOTAL SOFTWARE CONFIGURATION MANAGEMENT PACKAGE




**VCS** provides Software Configuration Management solutions designed to enhance software development in the MPE, Unix and DOS environments. These solutions extend across the entire software cycle from the original analysis, through design, implementation, testing, distribution, and continued maintenance.

Our products are fully integrated to effectively bring order and control to the chaos that accompanies all significant software development. They improve software quality, increase productivity, improve project communication, enforce standards, automate software implementation and distribution processes, provide security and auditing, and report on the entire process from the historical perspective.

Please call to discuss your particular software configuration requirements.

## 1-800-DOC-VCS-1

 **Diamond Optimum Systems, Inc.**



argument order, multi-character flag names, automatic usage messages, and expression evaluation. It is written in C. I've tested it on Sun, DEC, SGI (MIPS), and HP machines and it works perfectly. I haven't tested it much on other machine types." This program was posted as volume 44, issue 50 and is available wherever the *comp.sources.misc* newsgroup is archived.

Does anyone need barcodes printed on HP laser printers? Dennis Tayler of Mind Link in British Columbia, Canada posted hp-barcode to do just that. This program can be found in volume 44, issue 51.

### COMP.SOURCES.X

A newly updated copy of xdvi was just posted to this newsgroup under volume 22, issue 110. Xdvi is a previewer for .dvi files, which are created by the mathematical word processing program TeX. Many of the Gnu project documents are maintained in TeX format. This software is also available via ftp from *ftp.x.org* in *contrib/applications* as *xdvi.tar.Z*.

### COMP.MISC.UNIX

If you need JPEG image compression and decompression libraries, such a package was posted in volume 44, issue 98. It's big. The original post consisted of 27 parts! Quoting some of the comments in the front of the package: "JPEG is a standardized compression method for full-color and gray-scale images. JPEG is intended for 'real-world' scenes; cartoons and other non-realistic images are not its strong suit. The code includes a reusable JPEG compression/decompression library, plus sample applications 'cjpeg' and 'djpeg', which perform conversion between JPEG JFIF format and image

files in PPM/PGM (PBMPLUS), GIF, BMP, Utah RLE, and Targa formats. Two small applications 'wjpgcom' and 'rdjpgcom' insert and extract textual comments in JFIF files. The package is highly portable; it has been used successfully on many machines ranging from Apple IIs to Crays."

Are there any FORTRAN users out there running on HP-UX? Wade Schauer of Sierra Consulting Corp. contributed a curses screen-handling interface package for FORTRAN users. He writes that "F-curses (C) is a library of FORTRAN and C routines that gives FORTRAN programmers transparent access to the curses library (a C library). With it the FORTRAN programmer can create pop-up windows, menus, help screens, data entry screens, and much more (many features are demonstrated in the demos that come with the F-curses package). Although the features are character-based, an application written with F-curses works very well under X Windows when run in an xterm terminal." Please note that this program is shareware-based.

Schauer does have one caveat with his product. The library was written to work with versions of curses that are found in UNIX System V Release 3.2 or later. Unfortunately, HP's curses is approximately from the days of Release 2! This doesn't mean that the product won't work—you may have some problems getting it to compile or having the output look pretty. One solution would be to use the well-known curses library called ncurses instead of HP's. The F-curses library is found on volume 44, issue 125.

For software developers, Dennis Vadura, of the University of Waterloo, contributed 'dmake', yet one more super-duper make utility. It was posted in volume 45, issue 1, as 27 parts. It is

also available directly from *plg.uwaterloo.ca* in the *pub/dmake* directory. "dmake is different from other versions of make in that it supports significant enhancements." It includes such features as enhanced macro facilities, portability between UNIX and DOS computers, and parallel making of targets on architectures that support it.

### MISCELLANEOUS

For some people, the Berkeley printer subsystem is still the only printer subsystem worth having. Someone has recently ported the BSD 4.3 version of the lpr/lpd subsystem to Solaris 5.3. To get it to work on HP-UX systems will probably require some work, but because this software has gone all the way from BSD to SVR4, converting to HP-UX shouldn't be too hard. Any takers?

While it may soon be available locally, the software appears to have come from someone at the National University of Singapore. Ftp to *ftp.nus.sg*. From there go to subdirectory */pub/NUS/ISCS/misc* and get file *lpr-sol2-p3.tar.gz*. The size is 153,437 bytes and it must be un-gzipped. Thank you, Ann-Kian Yeo.

Most people in the UNIX world use either the "standard" compress program found on virtually all computers or the newer and more powerful gzip program from the Free Software Foundation. On occasion, I've seen somebody post some sources compressed with the PC-DOS program pkzip. Unzipping such a file ordinarily requires ftping the file to a PC, unzipping it, and returning the file back to the UNIX system. While I haven't tried it, you may want to get a copy of the UNIX unzip program that's available from *quest.jpl.nasa.gov* as *unzip512.tar.Z* in the */pub* directory. The code is very portable; you should have

# WELCOME TO THE NEXT LEVEL IN UNIX TO NETWARE PRINTING

**PRINTPATH/NLM™** is a 100% software solution for printer sharing between UNIX systems and Novell NetWare servers over TCP/IP connections. **PRINTPATH/NLM** implements the UNIX **LPD/LPR** printing protocol on the NetWare server allowing the server to exchange print files with any system that supports the **LPD/LPR** printing protocol.

NetWare server print queues can be defined as remote printiners on UNIX systems and accessed via standard **lp** command syntax. No software is required on the UNIX system.

NetWare print queues can be exported to any printer on any UNIX system or to TCP/IP printers on the network. Supports multiple simultaneous connections in either direction.



It runs with  
NetWare

**PRINTPATH/NLM** delivers Unix host generated output to printers located near your NetWare users and allows network users to easily take advantage of host printing resources. All in a simple, reliable and inexpensive package.

The **PRINTPATH/NLM** 30-Day Demonstration is free and is the best way to see the printing capability and flexibility that **PRINTPATH/NLM** can bring to your network.

**RAC CONSULTING**  
**BOX 10099, OLYMPIA, WA. 98502**

**(360/206)-357-9572**  
**FAX: (360/206)-352-8453**

CIRCLE 152 ON READER SERVICE CARD

no trouble compiling it anywhere.

Someone on *comp.unix.aix* posted a request for software that allows users to send alphanumeric messages to commercial pagers on systems such as Bell paging. Daniel Mathews, from Bradley University, responded by mentioning a program called *snppage*. It is available on *ftp.cox.smu.edu* in the */pub/paging* directory as files *page-filter.shar* and *snppage.shar*.

For people trying to compile the GNU gcc version 2.6.0 compiler, a patch from HP is necessary for the compile to succeed. Get patch *PHSS\_4637*.

For all of you emacs editor aficionados, the Free Software Foundation (FSF) has released emacs version 19.27. I have been using it for a while now and really like its functionality. Most of my windows work in color with proper enhancements to key words, etc., depending upon the mode I'm operating in.

And yet another FSF goody is the emacs man page support package called *man.el*. The new version can be found at *fly.cnuce.cnr.it:pub/man.el.gz*. A more local site than Italy (which is where this apparently came from) is *ftp.hmc.edu/pub/emacs/packages/man*. This *man.el* fixes some bugs and is more robust and quicker than the one supplied with emacs 19.26.

For those of you looking for an HP site that contains all sorts of "goodies" related to peripherals such as plotters and printers, here's one you should try. Do an ftp to *ftp-boi.external.hp.com*. Browse through all their files. You might find something of interest. An alternate site for HP printer software is *rtf.mit.edu* under the path *pub/usenet/comp.sys.hp.hpux/comp.sys.hp.hpux\_FAQ*. Thanks to Rick Jones for posting this information on the Net.

And now for the site of the month.

There's an ftp repository in the UK and mirrored at the University of Wisconsin that has lots of good HP software ready and willing to be copied. Binary software (i.e., precompiled software) may exist. The stuff I have downloaded was in source form with makefiles ready to be used on an HP machine. Simply do an ftp to *ftp.cae.wisc.edu* (if you're in the UK, go to *hpux.csc.liv.ac.uk*; if you're in Germany, try *hpux.ask.uni-karlsruhe.de*). Files are available that run on HP-UX 8.0 (there are people out there still on HP-UX 8.0!) and HP-UX 9.0. ■

*Joe Berry is a senior software developer at Landmark Systems Corporation in Vienna, Virginia. He is one of the authors of Landmark's performance monitor, TMON for UNIX. A former HP 3000 systems specialist for Hewlett-Packard, he has been in the computer industry for more than 20 years. He can be reached at joe@landmark.com.*



by *Larry Headlund*

## Help!

ONLINE HELP AND DOCUMENTATION did not use to be a prominent part of UNIX. Originally, UNIX was by and for computer scientists and the source code and technical journal articles were it. As a matter of fact, all the documentation could fit in your briefcase. (It still can, but only if it is on CD-ROM.) Exhortations for Luke to go for the source are still a common response to requests for documentation, particularly with public software.

The first non-research use for UNIX was as a text processing system for Bell Lab. Hence `nroff`, `troff`, `tbl`, `mm`, and the whole alphabet of publishing tools. These tools had a lot of advantages. Besides being relatively user friendly (Have you ever used a keypunch machine? Correcting misspelling was an interesting procedure.), these tools had many other advantages. The documents themselves were plain text, without embedded hardware commands. There were some somewhat arcane printer control commands, but these were independent of any specific printer. Run through one filter, you got bold and underlined text on the screen. Through another filter you got a nicely formatted hard copy. And since these were printing commands in the text, not printer control codes, new printers could be supported by the addition of filters. You also had commands for including other documents within a document, making maintaining consistency much easier. When I was working on my Piled Higher and Deeper, I wrote 50-page papers using these tools and the line editor `ed` on a teletype terminal. But we were Real Men then.

As UNIX became more baroque,

these publishing tools were used in the creation of manual pages. The `man` command could print or display whatever explanations the author thought were appropriate. These could range from the pithy ("This does what you would expect," for a game) to 50-plus-page mini-textbooks. If the writer was disciplined, the documentation followed standards. There was a short description, a format line, and a description of the options. There were some examples, an explanation of any bugs, and a list of related `man` pages. References to other commands and functions were underlined. The standard could be followed by actually reading the recommendations, or the writer could take the common path of copying an existing manual document and modifying it for the new command. The manual documents were even stored in defined places—a place for system administrator only commands, a place for system functions, a place for file formats, and so on. The new `man` pages were placed in the proper subdirectory of `/usr/man` (or `/usr/local/man` or `/usr/contrib/man`) and they were on a par with the pre-existing documentation.

One of the powers of UNIX is the relative ease of adding functionality. And UNIX loves standards; that's why it has so many. So it is not surprising that a competing standard for documentation arose, `texinfo`. This one is particularly common in the Free Software Foundation/GNU universe.

### *Enter the GUIs*

These documentation tools produce rather linear and text-oriented manuals. There are tools within these schools for describing graphics, but

they are not commonly used for documentation. For one reason, they don't port well to character terminals. The capabilities of graphical user interfaces awakened a hunger for help documentation that used those capabilities. Help documentation was an obvious candidate for hypertext. Hypertext documents, like *Last Year at Marienbad*, have a beginning, a middle, and an end, but not necessarily in that order. You navigate through a hypertext document, selecting more detail on a particular topic or exploring a related document. What a natural way to access documentation!

There have been some responses to this challenge. The commercial desktop publishing package FrameMaker has some features that aid creation of documentation, including a display-only license manager for help. You can use all the FrameMaker tools for graphics, indexing, and version control with your help creation. More recently, the Common Desktop Environment (CDE) of the COSE initiative includes a help system based on the Bento format for documents from Apple. This format allows you to have active objects inside a help document. That is, you can click on a screen or icon within the help document and launch a demo or anything else.

All the above solutions require, of course, that the documentation be rewritten in the new format. What a load of work is implied in that "of course"! Continuing work, too, as you integrate new packages into your system. I wouldn't consider it desirable to force users to learn several distinct help systems and force them to remember which command is accessed through

## Do You Know Where Your Security Holes Are? Find Them with SecurityAudit/UX!

**Have You Heard that UNIX is Notorious for Its Lack of Security Features?  
Do You Know Where to Check to See if Your HP-UX System is Secure?  
Do You Have the Time to Do This Checking Regularly?  
Use SecurityAudit/UX To Do It All!**

EVEN IF YOUR SYSTEM IS SET UP CORRECTLY (AND HOW WOULD YOU KNOW IF IT WAS?) AND HAS NO SECURITY LOOPHOLES, IT CAN BE VERY DIFFICULT TO MONITOR SYSTEM CHANGES, AND TO ENSURE THAT SECURITY ISN'T COMPROMISED. THE MAGNITUDE OF THE PROBLEM INCREASES AS THE TOTAL NUMBER OF USERS CONFIGURED AND THE TOTAL NUMBER OF FILES GROWS. IT'S EASY FOR ORDINARY USERS TO CHANGE THE SECURITY OF THEIR OWN FILES TO ALLOW OTHERS TO ACCESS THE CONTENTS. A LOOPHOLE LEFT BEHIND INADVERTENTLY OR ON PURPOSE MAY BE EXPLOITED BY A DISGRUNTLED EMPLOYEE OR A HACKER TO BREAK SYSTEM SECURITY, SOMETIMES MUCH LATER.

**SecurityAudit/UX** PRODUCES OVER 40 REPORTS, CONTAINING DETAILED INFORMATION ON THE FOLLOWING CLASSES OF PROBLEMS:

- User and Group-related problems, including weak passwords and non-unique identification numbers.
- File-system related problems, including historical tracking of files and detection of potential Trojan horses.
- PDF-related security problems, extended to detect changes in ACL specifications.
- Logging subsystems status display, and logfile analysis.
- Network-related status display and configuration weaknesses.


**SecurityAudit/UX** RUNS ON ALL HP-UX BASED 9000 SERIES 700 AND 800 SYSTEMS, AND HAS BEEN SPECIFICALLY TAILORED TO ADDRESS PECULIARITIES OF HP-UX, SUCH AS PDF, ACL AND HP'S SHADOW PASSWORDS.

**Call EUGENE VOLOKH for more info!**



1135 S. Beverly Drive  
Los Angeles, CA 90035 U.S.A.  
FAX (310) 785-9566

CIRCLE 40 ON READER SERVICE CARD



# I/O Data Systems, Inc.

Buy - Sell - Lease - Trade  
**HEWLETT-PACKARD**  
Systems, Workstations  
Peripherals & Solutions

**NOW FEATURING**

**Fax-on-Demand & Interactive Voice Response  
Solutions**  
**For your Hewlett-Packard System or PC Network**



**(216) 835-2211**  
27378 W. Oviatt  
Bay Village, OH 44140  
FAX: (216) 835-0220

CIRCLE 105 ON READER SERVICE CARD



which system. I know I don't like to have to do it.

### **An Ideal Help System Specification**

Stepping back, what features would an ideal help system have? My wish list includes:

**A. Hypertext navigation.** Click on a topic, open the document for that topic. I would want to be able to move between documents and have the system keep a map of where I have been for me. I should be able to jump forward and backward in this list.

**B. Printing.** I want to be able to get hard copy of the document I'm looking at. It does not help to save the rain forests, but that paper is still needed.

**C. Reusability.** I want the tools available for my own projects. This ideal help system must be suitable for use not just for system help but for internal help. The most direct way would be to have the help tools built around a widget. Then that widget would be on a par with the other widgets in my application. Since I write mostly in Motif, that implies a Motif widget. In general, for documentation tools that aspire to be a standard and to be used as widely as possible, this rules out a GNU General Public License (GPL). Such a license would force the whole program incorporating the embedded help through a widget, which implies a library link, to become itself distributable under the GPL, and would not

have a lot of appeal for commercial software creators. Release under Library General Public License, which does not impose the same responsibilities on those who use the code, would seem more appropriate. It is the original author's choice, of course.

**D. Backward compatibility.** The existing documentation written to some standard should not have to be rewritten to fit into the hypertext system.

**E. Cut and Paste.** This is mostly for the examples. If there is an example of a typical command with arguments, I want to be able to cut it out, edit it as needed, and execute it in my term or command window.

**F. Authoring support.** There should be an easy, intuitive, and WYSIWYG way of creating and modifying the documents. This is given heightened importance by programmers' well-known reluctance to document. If professional help document writers are not available, there should be only minimal stumbling stones in the path to help documents for amateurs.

**G. Notes.** Users should be able to add personal notes to a document for their use only. This implies the authoring support in item F is in place.

### **Hman**

At this point I should announce that I have found a package on the Net that has feature A through G and H

through Z for good measure. Well, not quite, but hman by B. Raoult ([mab@ecmwf.co.uk](mailto:mab@ecmwf.co.uk)) handles A through D very well.

In the README included in the package the author says that the hman program is designed to highlight the features of the included HyperWidget. Since the HyperWidget is Motif-based and the whole package is public domain, we have item C (reusability) covered. If your application construction tool allows you to add widgets, there should be no problem. I added it to the Widget Control Language (WCL) smoothly. We have further confirmation of the ease of integration because the hman application itself was built using the commercial GUI constructor X-Designer. So the HyperWidget can become your tool of choice for displaying help.

The hypertext navigation of item A is fully implemented. When you click on a highlighted item, the corresponding document is opened. There is even a nice zoom animation effect. The last 100 selected items are kept in a history so you can retrace your steps if you wish. Hypertext navigation is handled inside the widget by a special binding to the select action when the selected text is highlighted. A side effect of this is that the usual mechanism for cutting and pasting a selected chunk of text does not work.

So item E, cut and paste of example text, is not available.

Printing is not available from within the application. Since these are the normal man pages, you can print the document using the usual `man | lp` construct. When constructing my own variation on the hman program, printing inside the application was

easy to add. So item B, Printing, is somewhat covered.

It is on item D, Compatibility, that hman really shines. All your existing man pages, and any new man pages, automatically become part of a hypertext system. This is accomplished by a clever parser inside the hypertext widget that interprets the underlined sections as pointers to other hypertext objects. If the author of the man pages has ignored standards and chosen to highlight sections of text that do not point to other man pages, then the application fails gracefully by not finding the indicated pages when the user double clicks on the highlighted text.


The authoring tools (item E) for hman are the same as those for vanilla man pages—that is, essentially none. The usual method of copying an existing man page and modifying it to fit the new application to be documented has to suffice. Any authoring tools developed for conventional man pages would work for hman. As a corollary to the lack of authoring tools, there is no way to attach customized notes to a document.

### Getting and making hman

The hman package was originally released under X11R4 and was in the contrib section of X11R5 also. With the release of X11R6, it is no longer in the contrib section of the release. You may find it on older CD-ROM versions of X software. Failing that, it is archived with *comp.sources.x*. I got my current copy from

[usc.edu:/archive/usenet/sources/comp.sources.x/volume16/hman](http://usc.edu:/archive/usenet/sources/comp.sources.x/volume16/hman)

Check archie for a site near you.

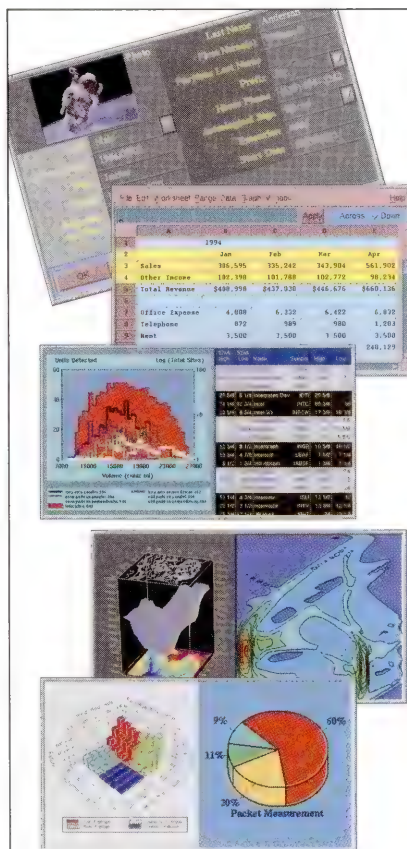

# XRT Widgets

"XRT/graph is a widget no serious developer should be without."  
"XRT/3d can't be beat."

*The X Journal*

XRT/graph displays data in virtually any type of 2-D graph or chart. It has hundreds of features including time-axis, lightning-fast updates, and a graph-builder tool.

XRT/3d displays 3-D data in surface plots, bars and contour graphs.

And XRT/table is ideal for displaying and editing tabular information including multi-font text and images, and even managing other widgets in cells.

All XRT widgets are highly-interactive, generate PostScript output, and use the standard Xt/Motif API, so they're easy to learn and integrate with popular GUI builder tools. And there's never any run-time or royalty fees when you distribute your applications to end users.

**FREE 30-DAY EVALUATION**  
**(800) 663-4723**

**KL GROUP**

(416) 594-1026 Fax (416) 594-1919  
info@klg.com <http://www.klg.com/>

XRT/ is a registered trademark and XRT/graph, XRT/3d and XRT/table are trademarks of KL Group Inc.

**CIRCLE 22 ON READER SERVICE CARD**

Making hman is reasonably straightforward if you have imake and its supporting files correctly set up for your machine. The only change I had to make was adding the line

```
#include <Xm/PrimitiveP.h>
```

after the line

```
#include <Xm/XmP.h>
```

in the file HyperP.h. This probably reflects a change in Motif include files from Motif1.1 to Motif1.2.

### Conclusion

While hman is not perfect, it is well worth the (minimal) effort to

install it. I personally use it in preference to the HP-supplied Motif help program. ■

*Larry Headlund is president of Eikonol Systems and has been working with commercial UNIX since 1982 and with X since 1987. He can be reached at [lmh@world.std.com](mailto:lmh@world.std.com) or 617.482.3345.*





## Industry Watch

MUCH ADO ABOUT INTEL'S problematic Pentium this winter. While debate continues on the real risk of using the precarious processors, both Compaq Computer and Digital Equipment Corp. upheld their penchant for Pentium with major releases of products based on it.

Compaq claims its new Deskpro 590, based on a 90-MHz Pentium, maximizes Pentium performance with the company's TriFlex/PCI architecture. The TriFlex/PCI architecture, also featured in Compaq's ProSignia 500 Pentium-based servers, promises optimized data flow among a 64-bit processor bus, a 64-bit memory bus, and a 32-bit I/O bus. Right in step, Digital introduced its Prioris HX Pentium-based SMP application servers, featuring the Power Scale architecture. Also using a 90-MHz Pentium, Digital says its Power Scale, which features a motherboard/daughter-card design, offers users better flexibility and migration options than architectures of its competitors. The company also claims the Prioris HX to be the first PC server in the industry to integrate a PCI-PCI bridge to ensure high performance across local area networks.

Meanwhile the Pentium peal from Compaq and Digital was muffled by IBM's announcement in December that the company was halting shipment of its PCs based on the Pentium processor. Although Intel has assured manufacturers that the likelihood of problems from the flawed Pentium are extremely remote (approximately once in 27,000 years), IBM says its research indicated that common spreadsheet programs, recalculating for 15 minutes a day, could produce Pentium-related errors as often as once every 24 days.

Getting beyond all the Pentium prattle, IBM has been making much of its

new deal with Red Brick Systems. In the agreement, IBM will provide Red Brick's Warehouse VPT RDBMS on its SP2 POWER parallel system. Designed for data warehouses of 500 GB or more, the SP2, IBM claims, offers high-performance parallel query processing for decision support. The Warehouse VPT software currently runs on a single processor, or single node, with plans to support a single database on multiple nodes in the second half of 1995.

The RDBMS story of 1994, though, was the demonstration at DECUS '94 in Anaheim of an 8-GB Oracle database running on Digital's 64-bit Alpha computers. According to Digital, the accomplishment is the world's largest in-memory commercial UNIX-based relational database, which would be impossible to implement with current 32-bit systems. The company claims initial tests show performance gains of 600 to 800 percent when compared to previous database technology, achieved at one tenth of the system cost of a traditional mainframe solution. Both companies see great promise for applications such as decision support, data warehousing, micro-marketing, geographic information systems (GIS), online transaction processing, and video-on-demand. ■

---

*Industry Watch is written by James. H. Gamble.*



**18-22 JUNE 1995 • STUTTGART, GERMANY**

Fast changing needs driven by increasingly competitive markets are forcing the pace for IT professionals. Consequently, building competence in new and key technologies is a major focus for the IUG '95 conference, through papers, tutorials, forum sessions and strategic presentations.

New this year are the twin MPE and HP-UX Competence Centres, a Technical Workstation Laboratory, and optional Pre-Conference Workshops.

You are invited to share your skills and experience with other HP users at this, the largest and most comprehensive gathering of Hewlett-Packard MPE, HP-UX, RTE and CAD/CAM professionals in Europe,

Areas in which strategic content papers are sought include: *emerging technologies, interoperability, desktop integration, HP-UX 10.0x and Windows '95.*

Electronic submissions are encouraged. You may download a submission form from the HP Systems Forum on Compuserve (go `cis:hpsys`, browse General Library). You may also request a form via HP Desk (Andrew Butler/HPGRMY) or via Internet `70624,363@compuserve.com`.

You can also request a submission form by sending a fax message to +44 1323 422072.

For more information on exhibiting in the trade exhibition, contact Dieter Grey on telephone +49 711 976 710, fax +49 711 976 7116

*Building Competence  
in a Challenging World...*

**CIRCLE 114 ON READER SERVICE CARD**





# CSL Perspective

IN THE LAST ISSUE'S column, I began to describe in some detail the steps for installing a CSL contribution. I hope most of you found it useful and informative despite the sometimes dry nature of discussions of this type.

If you were unable to browse through the previous discussion, call or drop me a note. I'll see that you get a copy.

Last time I was describing files that you will find included in most software. Files with names like README and INSTALL contain introductory information about a program. In many cases, a step-by-step description of the installation is included or a pointer to another file is noted. These files are always the first place you should consult before going any farther. Even for experienced software developers, it's a good idea to have a thorough understanding of the configuration before proceeding. I typically will print out these files, highlighting the pertinent information, and then keep this paper copy close by once I've begun configuration and compiling. You'll find that most developers will take the time to produce good documentation for their software, especially if they want to avoid a lot of e-mail from users with problems. Remember, it never

hurts to overdocument.

For the remainder of our discussion, let's use another contribution from the 1994 release as an example. Once you've unbundled the *less* contribution (f0022), the directory will contain the files shown in Table 1.

As you can see, there are files with a variety of names. In general, the naming convention is pretty standard. Files with the ".c" are C source, ".h" are the header or include files, ".nro" is the source of the man page, and ".man" is the formatted man page (i.e., it was produced by running the ".nro" file through the *nroff(1)* text processor). Although you don't see an example here, the manual page sources also come with numbered file extensions corresponding to the manual section (vi.1, sam.1m, etc).

Since we've already consulted the README file (you did read it, right?), we know that to install the program we first need to run a shell script called *linstall*. This script is actually a blessing in disguise. The author has automated the configuration process so that we don't have to do any editing of the files in order to get the program to compile. In other contributions, this script might

**TABLE 1** *less Files*

README	install_help	lesskey.c	option.c	signal.c
ch.c	install_key	lesskey.man	os.c	tags.c
cmd.h	install_kman	lesskey.nro	output.c	ttyin.c
command.c	install_less	line.c	parts	vecho.c
decode.c	install_lman	linenum.c	position.c	version.c
defines.h	less.h	linstall	position.h	
funcs.h	less.help	main.c	prim.c	
help.c	less.man	makefile	prompt.c	
input.c	less.nro	mkfuncs.awk	screen.c	

be called `Configure`. In general, if such a script is provided, you should use it. But be careful: the author has made some assumptions about the local configuration and compiling options. Always scan the various files to be sure everything is in order.

Let's look at the files that `install` created: `makefile` and `defines.h`. Listing 1 shows the configurable part of the file `makefile`. I've deleted the initial comment block and the build dependencies and rules. We'll discuss the purpose

of the makefile in a minute. As you can see, several variables or "macros" have been defined for us. These macros will be used during the compilation, linking, and installation phases. In this case, the macros have been defined with various file names, library search lists, and compiler optimization flags. Because of the way I've chosen to set up my local site configuration, I'll need to change the `INSTALL_LESSMAN` and `INSTALL_KEYMAN` macros to `$(ROOT)/usr/local/man/man1/less.1` and

`$(ROOT)/usr/local/man/man1/lesskey.1`. I also want to change the location of `HELPPFILE` to `/usr/local/lib/less.help` since I don't want non-executable files in my bin directory. To make these changes, simply use your favorite text editor on the file.

You should also look at `defines.h` for any macros that might need modification. Remember that the `install` script intelligently set some of these macros based on what it discovered about your system. Unless you fully understand what

#### LISTING 1 Partial less makefile

```
#####
# Compilation environment.
#####

# LIBS is the list of libraries needed.
LIBS = -lcurses -ltermcap -lPW

# INSTALL_LESS is a list of the public versions of less.
# INSTALL_KEY is a list of the public versions of lesskey.
# INSTALL_HELP is a list of the public version of the help file.
# INSTALL_LESSMAN is a list of the public versions of the less manual page.
# INSTALL_KEYMAN is a list of the public versions of the lesskey manual page. INSTALL_LESS
= $(ROOT)/usr/local/bin/less
INSTALL_KEY = $(ROOT)/usr/local/bin/lesskey
INSTALL_HELP = $(ROOT)/usr/local/bin/less.help
INSTALL_LESSMAN = $(ROOT)/usr/man/man1/less.1
INSTALL_KEYMAN = $(ROOT)/usr/man/man1/lesskey.1
LESS_MANUAL = less.nro
KEY_MANUAL = lesskey.nro
HELPPFILE = /usr/local/bin/less.help

# OPTIM is passed to the compiler and the loader.
# It is normally "-O" but may be, for example, "-g".
OPTIM = -O

CFLAGS = $(OPTIM)
...
```



to change and why, you might want to go with it for now.

We're ready to compile and link the program and we'll use *make(1)* to accomplish this. In a nutshell, *make(1)* is a tool that generates commands for execution by the shell. These commands are most commonly those that would be used to manage a collection of files, such as a programming project. Common program development tasks such as compilation, linking, library construction, and directory maintenance are greatly simplified once the interrelationships between these files have been defined in the Makefile.

Since *make(1)* is such a useful tool, you should find a Makefile in almost every CSL contribution. If you want to learn more about *make*, consult Chapter 13 in *Programming on HP-UX* or get *Managing Projects with make* from O'Reilly

& Associates.

One more thing before we build *less*. You'll need a C compiler on your system in order to proceed. Every HP-UX system comes with the K&R C compiler in order to build your system's kernel. This compiler, although relatively functional, is not recommended for the serious program developer. HP, as well as many other UNIX vendors, have unbundled their full-feature compilers from the base system software. This decision is good for the users who might be running off-the-shelf applications since they would not be paying for a compiler that will never be used. But a software developer must either buy the ANSI C compiler from HP or find another one. On the 1994 CSL release, you will find the latest version of the Free Software Foundation's GNU C Compiler. We have also provided the PA-RISC 1.1 binary as well.

Once that compiler or the HP ANSI-C compiler is installed, you can proceed with the *make*; you're ready to build the program. Type the command *make* and sit back and watch. You'll notice the process echoing the commands that are executed; *Figure 1* shows what I see. The lines with *cc -O -c* are running the C compiler and producing files with a file name extension of '.o' and the *cc -O -o* will cause the linker to produce the executable. The line with the *-DHELPCFILE* is compiling the *help.c* module and sending a macro definition into the compiler pre-processor stage. This technique of providing macro values at compile time is relatively common. If an error were to occur in the process of compiling, the *make* would stop immediately. Since most of the CSL contributions have already been run though a compile test, errors are rare.

**FIGURE 1** *Partial make Log Messages*

```
$ make
cc -c main.c
cc -O -c option.c
...
...
cc -O -c -DHELPCFILE=\"/usr/local/bin/less.help\" help.c
...
cc -O -o less main.o option.o prim.o ch.o position.o input.o output.o
screen.o prompt.o line.o signal.o os.o help.o ttyin.o decode.o command.o
linenum.o tags.o version.o -lcurses -ltermcap -lpw
cc -O -c lesskey.c
cc -O -o lesskey lesskey.o
$
```

# MULTIPLE emulations

## FOR MIXED ENVIRONMENTS WITH SIMILAR 'LOOK & FEEL'

At this point, the program is compiled and can be run from the local directory. You should test the execution of the program, if possible, before moving it to its final installation directories. Sometimes, programs cannot be tested locally, so you need to run *make install* to move everything to its final location. You must install as the root user (either through *su(1)* or by logging in) as you will be installing files in protected system directories. The installation is again accomplished through the use of *make*. As before, you can watch this process and see what commands are being executed. If you are the type who gets really nervous installing software, use the -n (no-execute) option to view the commands first.

That's enough for now. Next month, I'll review the variations of this process for the X Window and Motif contributions. ■

PERICOM's **teem** range of connectivity software tools will help protect your company's investment in existing application software. **teemtalk** for the Microsoft® Windows™ operating system and **teem-X** for the X Window System allow access to an entire mainframe

world, enabling the widest range of PCs using Microsoft® Windows™ and X Window-based display stations including DEC, IBM, HP, Silicon Graphics and Sun to emulate the widest range of terminals.

**teem** products feature flawless emulation of industry standard text and graphics terminals including:

DEC VT100, 220, 320	Prime PT250
& 340 (ReGIS)	Retrographics VT640
IBM 3270	Tandem 6526, 6530
Tektronix 4010, 4014,	Westward 2119, 3220
4207 & 4111	Viewdata
HP 2392A, 2622A, 700/92	

And PERICOM connectivity doesn't stop there. **teem** products also provide advanced connectivity and productivity features including:

File transfer	Dynamic window sizing
Scripting language	Dynamic Data Exchange
Auto colour mode	Cut and Paste
Programmable soft buttons	Extensive network support

So for cost-effective terminal emulation that makes the most of your IT investment, call PERICOM now! (DOS products also available)



Pericom Inc  
9 Princess Road, Suite D  
Lawrenceville, NJ 08648, USA  
Tel: 609 895-0404 Fax: 609 895-0408  
UK Tel: + 44 (0)908 265533  
France Tel: 1 30.61.50.25  
Germany Tel: 02 14/50 61 66  
Singapore Tel: 278 6545/6  
E-Mail: barryb@pericom-usa.com



Microsoft is a registered trademark and Windows and the Windows logo are trademarks of Microsoft Corporation. All other trademarks acknowledged. **teemtalk** and **teem-X** are trademarks of PERICOM SOFTWARE PLC.

*Paul Gerwitz is chairman of the CSL/HP-UX committee and is a technology specialist at Eastman Kodak Company in Rochester, New York. He can be reached by phone at 716-477-3067 or by e-mail at gerwitz@interex.org or gerwitz@kodak.com.*

CIRCLE 95 ON READER SERVICE CARD





# Product Focus

## Pixel!FX Version 3.0

"The fact that PC and Mac applications are moving to UNIX validates the UNIX platform in general for working with images," said Mark Tavill, President of Mentalix. He is encouraged by the availability of Adobe, Aldus, and Corel PC applications on UNIX machines rather than concerned that these products compete with Pixel!FX, Mentalix' all-in-one image scanning, editing, and optical character recognition (OCR) package for UNIX.

Tavill isn't counting on his product's ability to exploit the UNIX operating system's superior performance and large file handling to differentiate it from other image manipulation products—all graphics packages on UNIX take advantage of these operating system strengths. Rather, Tavill believes Pixel!FX,

particularly the recently released Version 3.0, will carve a nice niche for itself because it addresses UNIX's weaknesses: lack of standards and PC-quality GUI. That and the fact that "it's a real 'kitchen sink' product; it does what a lot of people want to do," he said, adding, "(We) provide a lot of capability at a reasonable price."

A Pixel!FX floating license, which costs \$1,599, integrates three stand-alone applications: Pixel!SCAN, which serves as a high-performance interface to a variety of scanners; Pixel!VIEW, which enables users to display and translate images in a variety of file formats; and Pixel!EDIT, a comprehensive image

enhancement and photo retouching application. Pixel!OCR is an optional package that enables scanned line art to be accurately converted to ASCII text and imported into publishing or word processing programs for text editing.

Version 3.0 includes a revamped "Windows-style" interface, integrated print management capability, and an API that enables image scanning, file conversion, and OCR to be performed from a UNIX shell or third-party application.

Mentalix' scanning software, Pixel!SCAN, enables support of multiple scanners, including those from AGFA, Fujitsu, HP, Howtek, Microtek, Sharp, and UMAX. PC users may not see this as a considerable accomplishment, but that's because the PC world has TWAIN, a generally accepted scanning standard. There is no TWAIN-like standard on UNIX, so much work was done to support each of the nine platform device drivers for nearly 20 scanners.

Tavill praises Pixel!SCAN for its advanced features, claiming, "The SCAN module is as good as anything else out there, period." Pixel!SCAN offers pre-scanning to display a low-resolution color representation of the image to be scanned. In prescan mode, users can adjust size and scanned area of an image, zooming in and out to view it. Color, size, resolution, and output parameters also can be interactively controlled. Scan images also can be saved directly into a TIFF file.

The scan module's integration with the Pixel!EDIT module enables users to bring scans directly into the module for image altering. Pixel!EDIT features unlimited undo/redo, and Tavill remarked, "(The market) is finally seeing other products that have this, but it's an exception." With Pixel!FX, 199



Pixel!FX Version 3.0

different edits can be undone.

Editing functions are enhanced by a "Windows-style" interface that makes the product easy to learn and use for those with PC or Mac experience. Icon toolbars that are available in every Pixel!FX window and tear-off menus, which allow frequently used menus to remain open and be moved around the screen, improve ease of use. In addition, the new point-and-click interface has been designed such that "75 percent of the capabilities on our product are accessed with a single mouse click," Tavill remarked.

The interface also enables users to drag an image icon over a function icon to execute a function—much as dragging a file or disk over the Macintosh "trashcan" icon will delete a file or eject a disk. Users also can drag image icons to or from applications compliant with Motif 1.2.

Integration with other applications is achieved through the Pixel!VIEW module, which supports 15 file formats. With Version 3.0, the product supports the WordPerfect image file format (.WPG) so that users can save images directly into WordPerfect UNIX documents. It also supports many file structures, but Interleaf and FrameMaker users can actually integrate Pixel!FX into their environment. For example, Tavill explained, a user can call up Pixel!FX from the FrameMaker menu bar, use it to edit an image, and save that image directly to the FrameMaker document. To edit a saved graphic with FrameMaker, a user has only to double-click on a picture and edit. Pixel!FX and FrameMaker applications have to be on the same network, but not necessarily the same machine.

The linking of applications in this

manner is similar to the capability provided with such PC standards as Object Linking and Embedding (OLE). However, as with TWAIN, "There is no such thing as OLE in UNIX," said Tavill. Rather, Pixel!FX and similarly featured applications are recognized by FrameMaker as "live-linked inset editors" and by Interleaf as "layered applications."

Users can purchase an optional OCR engine, which reads the black and white areas of a scanned hard-copy document and converts that data into letters recognized as such. Tavill noted that Pixel!OCR is a "very accurate engine, and that's its strength." In fact, company literature quotes 99 percent accuracy. Tavill recommends it for "casual, moderate" use, since the scanners that are fast enough for heavy duty use are not supported. He also noted that the Pixel!OCR engine does not "necessarily have all the bells and whistles" offered in other products, but added that users converting 10 to 40 pages per week "would probably be very happy with our product."

While noting that Pixel!FX "does a lot of things and does them well," Tavill acknowledged that it is not for everyone. Adobe Photoshop has image manipulation features "that we don't have, nor do we intend to offer them," he said. He advised people needing advanced features beyond those provided in Pixel!FX to buy something like Photoshop, but "what they should buy with Photoshop is my scanning product."

Contact Mentalix Inc., 1700 Alma Drive, Suite 110, Plano, Texas, 75075, phone: (214) 423-9377, fax: (214) 423-1145, e-mail: info@mentalix.com. ■

---

*Michelle Pollace is the New Products editor for hp-ux/usr.*

## Are You Moving?

**Send your change of address to**

**Member Services  
Department  
Interex  
P.O. Box 3439,  
Sunnyvale, CA  
94088-3439, USA**

**Or call**

**408.747.0227**

**Or fax**

**408.747.0947**



**interex**

*Shared Knowledge.  
Shared Power.*





# New Products

## Manufacturing Software for SYBASE

Avalon Software has announced Avalon CIIM 9.0 for SYBASE, which delivers new applications for shop floor control and capacity resource planning; new core functionality enabling demand-driven procurement and repetitive manufacturing; and enhanced financial applications to support multinational

manufacturers and distributors.

Avalon CIIM is said to be the only manufacturing solution to provide native support for both ORACLE and SYBASE, a client-server architecture, computer-aided software engineering (CASE) tools, and a wide range of hardware and operating platforms.

The new Shop Floor Control module enables manufacturers to fully control and monitor both internal and subcontracted production activities. It is tightly linked to Avalon's Procurement module, enabling manufacturers to automatically generate requisition orders for parts and services. The new Capacity Resource Planning (CRP) module enables customers to evaluate the impact of released and recommended orders against current and future production resources.

Customer orders and low inventory levels can trigger automatic inventory purchases and other procurement functions. Avalon has enhanced the Accounts Receivable, Accounts Payable, and General Ledger modules to provide expanded multicurrency capabilities, as well as a new global-oriented accounting functionality.

Prices range from \$75,000 to \$750,000 depending on hardware configuration, number of users, and modules purchased.

Contact Avalon Software, 3716 East Columbia, Tucson, Arizona 85714-3414, phone: (602) 790-4214, fax: (602) 750-0822.

## Education, Non-Profit Administration

Datatel Incorporated has announced a formal partnership with Universal Algorithms Inc. (UAI) to sell its SCHEDULES25, 25E, and MODEL25 high-powered modeling tools for space

## HP-UX 10.0 Release Dates Set

Hewlett-Packard has announced the long-awaited arrival of HP-UX 10.0. The *new* business release is slated for February 6, and the *general* business release is scheduled for mid-1995. The new business release is specifically aimed at ISVs and existing customers who have new projects requiring 10.0 functionality. When the general business release comes, HP will have key third-party applications and HP LAN products available.

HP-UX 10.0 is binary compatible with HP-UX Version 9.04.

Some of the key contributions of 10.0 are providing high-end scalability. For scaling applications across the enterprise, HP will be bundling the DCE client services, remote procedure call timing, and threads with HP-UX 10.0.

Release 10.0 enables symmetric multiprocessing (SMP) for future multiprocessing HP 9000 workstations. Enhanced compilers, which were made available on the 9.0-based systems, will be available again on 10.0. The compilers can give a 10 to 20 percent performance improvement.

Memory mapped files and dynamic buffer cache, previously available on the Series 700, are now available on the Series 800 platform. Both workstation and server platforms will now have software disk striping for improved I/O performance.

HP plans to move from the current HP-UX directory layout to the new SV.4 file system directory layout, the de facto industry standard. HP also will move from the HP-UX diskless implementation to the industry's de facto multivendor diskless standard. New features from NFS 4.2 and support for 4-byte EUC also will be provided in 10.0. In addition, a SPEC 1170-enabled HP-UX environment is scheduled for the end of 1995.

Significant enterprise management features have been added. With 10.0, SAM provides "administrator roles," where the lead administrator customizes individual SAM implementations for other administrators who do not need superuser capabilities. This allows for improved security and customization.

Other enhancements include the simple configuration of disk printers in the kernel. Enhanced password management and login restrictions are also featured.

New high availability features, LVM enhancements, and HP-UX Memory Page Deallocation are also offered.





## MEMORY IS NOT A COMMODITY

DRAMs are traded like soybeans, pork bellies and crude oil. The market is volatile. Prices change daily.

Well designed, properly configured and thoroughly tested memory products are as rare as spotted owls.

It's your workstation. Your work. When you need memory, call Newport Digital.

You'll get the quality and service you expect from the leader in HP workstation enhancements. Superior products. Outstanding technical support. Very competitive prices.

HP Series									
HP-200/310/320									
HP-319									
HP-330/350/370									
HP-332									
HP-340									
HP-345/375/380									
HP-360									
HP-362									
HP-382									
HP-400/425/433									
HP-425E									
HP-700RX									
HP-705/710									
HP-715/725									
HP-720/730/735									
HP-742/745/747									
HP-750/755									
HP-8X7/9X7									
HP-FXX/GXX/HXX/XX									

**Call today.** Speak with an expert on Hewlett-Packard computers. See why memory worth having is not a commodity.

**NEWPORT DIGITAL**  
**1-800-383-3642**

CIRCLE 107 ON READER SERVICE CARD



### Client-Server Spreadsheet

Applied Information Systems has announced XESS 3.0, a spreadsheet product that includes an enhanced user interface for worksheets, graphs, and charts, plus full WYSIWYG support for display and printing, improved performance, and over 100 additional functions.

XESS is a customizable spreadsheet for X Windows that is easily combined with other applications. The XESS connections API toolkit supports application-specific add-ins and tight integration with other applications.

XESS is a real-time product capable of sending and receiving data and commands from other X Windows programs and of automatically recalculating the affected worksheets and graphs.

The product can augment the standard spreadsheet operations with functions for matrix operations, Fourier transforms, multiple regressions, linear equation solving, and advanced statistics. Users can build basic graphs with a single selection and mouse click and use colors and shading. Graph types include bar, line, scatter,  $x-y$ , polar, pie, histogram, high-low, contour, and 3D surfaces. When used for real-time applications, graphs change automatically as the input data changes.

Contact Applied Information Systems, Inc., 100 Europa Drive, Suite 555, Chapel Hill, North Carolina 27514, phone: (919) 942-7801 or (800) 334-5510, fax: (919) 493-7563.



### Applied Information Systems XESS 3.0

copy, delete, rename, print, view, compress, and edit files without using the UNIX command line.

A ZQL (Zortec Query Language) with data dictionary repository lets users obtain instant information on the contents in any file without writing a COBOL program.

The Zortec COBOL Programmer's Workbench, complete with all components, is \$2,495.

Contact Zortec International, 1321 Murfreesboro Road, Nashville, Tennessee 37217, phone: (615) 361-7000.

### Object Request Broker

I-Kinetics, Inc. has announced Release 3 of its I-Bridge Object Request Broker (ORB), said to be the first ORB to deliver UNIX applications, databases, services, utilities, and files as OLE objects to Microsoft Windows-based applications; to include object adapters to popular databases; and to include high-level access services that are identical for different sources. The I-Bridge ORB is optimized for retrieving data from various UNIX data resources. The ORB is distributed, with one part executing on Windows and providing services to Windows-based applications, and a second part executing on a UNIX host, along with object adapters to different types of data sources. The ObjectPump is a general-purpose adapter for accessing UNIX applications, services, utilities, and files, and redirects their output to the requesting Windows-based application. Specialized object adapters are available for Ingres, Oracle, and Sybase.

DDE and DLL interfaces are also available for PowerBuilder, Lotus 1-2-3, or any other Windows-based application that does not yet support OLE Automation.

planning and scheduling into Datatel's current and future client base.

Datatel's specialized applications include Colleague for Student, Human Resources, Financial, and Alumni & Development administrative systems management; Benefactor for advanced fund-raising management in higher education and non-profit organizations; and a CASE tool.

UAI's specialized applications offer automatic bulk classroom scheduling; online, multiuser course and event scheduling; and point-and-click graphic modeling.

Each partner's products run on multiple hardware platforms, including HP 9000s.

Contact Datatel, Inc., 4375 Fair Lakes Court, Fairfax, Virginia 22033, phone: (703) 968-9000.

### COBOL Programmer's Workbench

Zortec has announced its COBOL Programmer's Workbench, which includes several components to help RMCOBOL programmers working in a UNIX environment reduce time spent on routine chores. The workbench includes a data inspector that allows browsing of formatted database records with access by any key and any value of that key. Data is displayed in hexadecimal and ASCII. A "byte mechanic" extends these capabilities to allow modification of data in hexadecimal format. Users can edit down to the byte level, regardless of data type.

The full-screen editor is designed to be easy to use. Editing functions can be assigned to any keys desired. In addition, a comprehensive file manager called Ztree is included. Ztree lets a user

# CHANGE OF PLANS !

*Change to Plan-B for host-based client/server PC network backup*

	Plan-A (THE OLD WAY)	PLAN B
<b>Completeness</b>	"We only back up our PC servers. We don't worry about data on users' PCs."	"Plan-B backs up all our PCs and PC servers, or whichever PCs we specify."
<b>Automation</b>	"Users perform their own backups. We give each one a box of floppy disks and they come to us when they need more."	"We used Plan-B's scheduler to automatically back up our PCs to our HP9000's DDS drive at night."
<b>Convenience</b>	"We have someone who comes in at night and carries a Trakker to each PC and backs them up one-by-one during the night. Users fill out a form if they need a file restored, and our night person restores the file."	"Plan-B backups are done with no user or operator intervention. The PC data is written to tape as part of our HP9000 backup. Users have a program on their PCs which they use to restore any file, any time, in seconds."
<b>Control</b>	"Users are supposed to back up their own PCs. We tell them to put important files on the file server anyway."	"Plan-B meets our auditor's requirements for ensuring that all corporate data is safeguarded."
<b>Integrity</b>	"We are not concerned about data consistency between PCs and the HP9000. Our client/server applications have not been implemented yet."	"Plan-B is the only backup package we found that supports our client/server environment, in which interrelated data is contained on PCs and the HP9000."
<b>Security</b>	"Users keep their backup diskettes in their desk drawers."	"With Plan-B, our PC backups are as reliable and secure as our HP9000 backups."
<b>Performance</b>	"PCs with large disk drives can take a very long time. We tried doing a PC network-based backup but it was way too slow."	"Plan-B's speed blows everything else away, since it uses the horsepower of our HP9000 system and backs up multiple PCs concurrently."

**CALL YOUR ORBIT REPRESENTATIVE FOR MORE INFORMATION OR A FREE DEMO**

DATA PROTECTION BY

**ORBIT**

ORBIT SOFTWARE, 315 DIABLO ROAD, DANVILLE, CA 94526 U.S.A. (800) 6-ONLINE or (510) 837-4143, FAX (510) 837-5752

<b>ORBIT Benelux</b> (Utrecht)	<b>ORBIT France</b> (Nantes)	<b>ORBIT Germany</b> (Berlin)	<b>ORBIT Italy</b> (Milan)	<b>ORBIT Scandinavia</b> (Helsinki)	<b>ORBIT UK</b> (London)	<b>ORBIT Far East</b> (Singapore)
(31) 34 65 53 884	(33) 40 25 16 50	(49) 30 852 70 97	(39) 2 33 41 21	(358) 0 638 450	(44) 372 360333	(65) 227-6959
fax 34 65 54 101	fax 40 25 16 52	fax 30 852 70 35	fax 2 33 41 23 33	fax 0 638 445	fax 372 360305	fax 227-6867

CIRCLE 26 ON READER SERVICE CARD



**Statware, Inc. STATIT****Statistical Software**

Statware, Inc. has introduced an OSF/Motif version of its statistical and graphical analysis software, STATIT.

Highlights of the user interface include the ability to display multiple graphic windows for different views of a dataset and continual access to all graphs produced during a work session, a spreadsheet-style window for easy data viewing and editing, online hypertext help for quick and convenient reference, user-configurable "smart buttons" for task shortcuts, pull-down menus with function descriptions, and tear-off menus that remain open for frequent use.

It offers statistical process control capabilities for manufacturing, time series and forecasting for finance, a broad range of statistical routines to analyze experimental data for engineering, and company-wide, 3-D perspective graphics, report writing capabilities, and easy access to data.

STATIT is available for HP 9000s direct from Statware, Inc. Pricing begins at \$895 for a floating license. A free demo version is offered.

Contact Statware, Inc., 260 SW Madison Avenue, Corvallis, Oregon 97333, phone: (503) 753-5382, fax: (503) 758-4666, e-mail: [info@statware.com](mailto:info@statware.com).

I-Bridge also includes simultaneous data retrieval from multiple sources. It offers easy installation and high performance by eliminating extra database-specific drivers and communications products on the PC, SQL transparency so that all vendor-specific SQL extensions are supported, dial-up and mobile operation, and generation and collection of performance statistics to support system optimization.

Release 3 with a Starter Kit containing one UNIX ORB and two Windows-compatible ORBs is priced at \$995. Customers have the option of including with the UNIX ORB one of the database object adapters or the ObjectPump.

Contact I-Kinetics, Inc., 19 Bishop Allen Drive, Cambridge, Massachusetts 02139, phone: (617) 661-8181, fax: (617) 661-8625, e-mail: [ahirsch@i-kinetics.com](mailto:ahirsch@i-kinetics.com).

**Metrix Oracle Integration**

Metrix has announced that Oracle has inducted Metrix into its Cooperative

Alliance Initiative (CAI) program, highlighting Metrix' OpenUPTIME service management software as a "best of breed" application in the customer service industry. As part of the CAI program, Oracle will create interfaces from the OpenUPTIME Field Service, Support Desk, and Repair Center applications to the Oracle Cooperative Applications product suite.

Oracle Cooperative Applications are integrated enterprise-wide packaged applications that support a wide range of business-critical functions including financials, manufacturing, distribution, human resources, and project control operations. Metrix will work cooperatively with Oracle's Design and Migration Services organization to reinforce existing interfaces between OpenUPTIME and Oracle cooperative applications.

Contact Metrix, Inc., 20975 Swenson Drive, Waukesha, Wisconsin 53186-4064, phone: (414) 798-8560, fax: (414) 798-8573.

**Development Environment for TUXEDO**

JYACC, Inc. has announced JAM/Transaction Processing interface (JAM/TPi) for TUXEDO Version 1.0. JAM/TPi for TUXE-

DO integrates the user-interface and relational database capabilities of JAM with the distributed OLTP capabilities of TUXEDO. JAM/TPi provides for simple construction of both client and application server components.

Novell's TUXEDO is the leading distributed OLTP system in the UNIX market. It provides a high level of fault tolerance for distributed applications; detail processing control, such as load balancing, job prioritization, and asynchronous execution; application partitioning, allowing dynamic redistribution of application components; database independence; enhanced security and access control; and mainframe connectivity.

No knowledge of the TUXEDO API or of C programming is required, and the JAM/TPi methodology is comparatively simple. It constructs both TUXEDO clients and TUXEDO servers and supports the critical features of TUXEDO, including FML buffers for communications with non-JAM/TPi clients and servers.

Contact JYACC, Inc., 116 John Street, New York, New York 10038, phone: (212) 267-7722, fax: (212) 608-6753.

**Customer Database/Document Management**

Group 1 Software has announced Label Printing Plus, EZ-CASE Plus, and Merge/Purge Plus for the HP 9000, HP 3000, and other computers. These systems were previously available only for use with IBM and compatible mainframe and midrange computers.



Label Printing Plus lets a user print from 1-up to 9-up customized mailing labels of almost any size without custom programming. The size of each label and distance between labels can be specified, and up to 12 lines per label can be printed. The system accepts an input record of virtually any length or format, and allows users to include seed names for tracking purposes.

EZ-CASE Plus is a callable subroutine that uses algorithms and system tables to case and punctuate virtually any type of data, including individual and company names, job titles, and addresses, prior to printing.

Merge/Purge Plus detects and eliminates duplicates within a single file or across multiple files. It is designed to identify duplicate names and addresses even when there are variations or misspellings in the name and address components. The system can process up to 200 different list codes. It produces detailed reports, list comparisons, and statistics.

Label Printing Plus lists from \$2,000 to \$5,000, EZ-CASE Plus lists from \$5,000 to \$10,000, and Merge/Purge Plus lists from \$10,000 to \$20,000. Prices vary according to the number of records passed through the system. Annual maintenance programs are available. Label Printing Plus, EZ-CASE Plus, and Merge/Plus Plus are available on 4-mm and 8-mm cartridge.

Contact Group 1 Software, 4200 Parliament Place, Lanham, Maryland 20706-1844, phone: (800) 368-5806, ext. 383.

### Full-Screen Editor

Robelle Consulting has enhanced Qedit for HP-UX, its full-screen editor for HP-UX programmers. Qedit/UX is

## Migrating to HP-UX? Looking For A Full-Screen Editor?

If you are familiar with HP's Edit/3000 or IBM's SPF editor, you already know how to use Qedit's basic editing commands. Qedit's full-screen mode uses all the functions of your HP terminal or emulators, so there are no complex and error-prone key sequences to learn.

And if you already use Qedit on the HP 3000, you'll love Qedit on HP-UX because Qedit has the same full-screen and command modes that you already use. You can be productive immediately.

With Robelle, you always get support you can count on. When you are on service with us, you receive more than just an enhanced version of Qedit once a year. You get fast, responsive service by telephone, fax, or e-mail. You'll also receive a subscription to our famous *What's Up, DOCumentation?* newsletter, full of tips, tricks, and news about the HP world in general.

### CALL TODAY FOR YOUR FREE EVALUATION COPY

**Robelle**  
CONSULTING LTD.

Unit 201, 15399-102A Ave.  
Surrey, B.C.  
Canada V3R 7K1

Phone: (604) 582-1700  
Fax: (604) 582-1799  
E-Mail: [info@robelle.com](mailto:info@robelle.com)

Official Robelle Distributors

Australia, New Zealand.....61 2 484 3979  
Central America.....502 2 314786  
Czech, Slovak Republics.....42 2 733 432  
France, Belgium.....33 1 69 86 60 00  
Germany.....49 7621 780 41

Greece, Italy.....30 1 777 0561  
Holland, Belgium.....31 4242 15655  
Mexico.....52 5 813 1325  
Saudi Arabia, U.A.E.....966 1 477 4555  
Scandinavia.....46 8 623 00 50

Singapore, Hong Kong.....65 4412688  
South Africa.....27 21 61 9001  
Switzerland, Austria.....41 31 981 06 66  
Taiwan.....886 2 545 2168  
United Kingdom, Ireland.....44 71 473 2558

Qedit is a trademark of Robelle Consulting Ltd.




CIRCLE 62 ON READER SERVICE CARD

## TelAlert... keeps you in touch



TelAlert is an alarm and notification solution for Unix™ systems and multivendor networks. TelAlert provides timely notification of events to network and system operations personnel and guarantees a quick response to important events. TelAlert ensures that designated staff take ownership of critical problems and it reports key events and actions to other concerned supervisors and management if desired. Alarm and notification options include:

- Voice notification via local or remote telephone
- Personal pagers including numeric and text
- Direct connect or modem attached printers
- Voice announcement over a loud speaker
- Visual/Audio alarm activation
- Voice mail or E-Mail

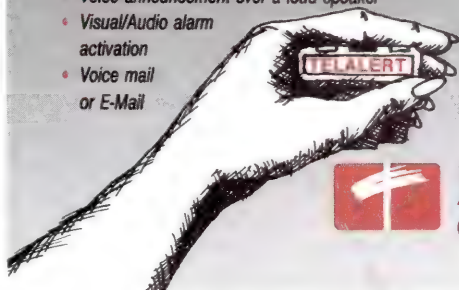

TelAlert consists of a hardware device connected at a terminal port and software running on the Unix management system or workstation. TelAlert is designed to be integrated with HP OpenView™, SunNet Manager™, Remedy Action Request System™, Network Paradigm™ and other system and network management environments via their command line interfaces in the device or event configuration menus.

TelAlert provides a complete audit trail file to retain the history of alarm requests and alarm acknowledgments. A comprehensive stored vocabulary allows the user to construct notification messages that pertain to their needs and provide specific details to the user. As a way to ensure that operations staff time is optimized and problems are solved as needed...



**TELAMON has it handled!**

492 Ninth Street, Suite 310 • Oakland, CA 94607-4098  
(800) 622-0630 • (916) 622-0630 • (916) 622-0738 FAX

CIRCLE 89 ON READER SERVICE CARD



## Storage Server

Dallas Digital, a Tripac Systems Incorporated company, has announced agreement with Fujitsu Computer Products of America, Inc. to distribute and support Fujitsu's DynaSERVE network storage management server.

DynaSERVE incorporates four data storage technologies into one server. With advanced storage management software, redundant array of independent disks (RAID), and optical and tape libraries, DynaSERVE delivers a high level of data integrity at storage capacities. It can store up to 40 GB in the optical library, 8 GB on RAID, and 255 GB in the tape library. The server's pre-installed storage management software is the Fujitsu Storage manager. Online storage is performed by the Fujitsu DynaRAID, and near-line storage is provided by the Hewlett-Packard 40T optical jukebox. The backup storage technology is the StorageTek 9708, 8-mm helical scan tape library. DynaSERVE supports UNIX-based workstations and up to 100 DOS, OS/2, and UNIX personal computers.

Initial setup of DynaSERVE is accomplished through the system's point-and-click commands. After configuration, the server provides transparent, automated data migration of seldom-used or unused files from the online RAID system to the more economical storage media.

DynaSERVE is available from Dallas Digital, which provides system integration and warranty support. The server's list price is \$190,000.

Contact Dallas Digital, 5215 North O'Connor, Suite 200, Irving, Texas 75039, phone: (214) 432-3550, fax: (214) 869-4550.

modeled on Robelle's Qedit editor for MPE, which for years has provided a complete development environment for programmers. Qedit/UX offers the same friendly look and ease of editing as its MPE counterpart, the company notes.

Once inside Qedit, users can run programs and execute shell commands (Qedit knows which shell is preferred) and shell scripts. In addition to its full-screen mode with cut-and-paste, Qedit has a command mode for editing files interactively or in shell scripts. Qedit 4.3 for HP-UX features the handling of large text files and support for the *cd* command, Reflection functions, and tab characters.

Users can edit text files of virtually unlimited size in Qedit. The new work-file format allows files to be up to 99 million lines long and 1,000 characters wide. Qedit also remembers the previous context (including current line and filename) when files are shut and then reopened.

Qedit for HP-UX comes with an up-to-date user manual and complete online help. Free evaluation copies are available.

Contact Robelle Consulting Ltd., Unit 201, 15399-102A Avenue, Surrey, B.C., Canada V3R 7K1, phone: (604) 582-1700, fax: (604) 582-1799, e-mail: [info@robelle.com](mailto:info@robelle.com).

## New From Scopus Technology, Inc.

### Contract Management

Scopus Technology, Inc. has announced ContractTEAM, the newest module of the ProTEAM customer information management system. ContractTEAM allows users to create, implement, and manage direct and third-party service offerings. The ContractTEAM module gives service providers easy access to information regarding contract terms and conditions, installed base, service history, and other information needed to manage

service agreements.

ContractTEAM automates the creation of a new service agreement and the updating or renewing of an existing one. It also provides a mechanism to quickly determine a customer's service status for approval in real time. In addition, it gathers information from the SupportTEAM customer support module regarding services delivered.

The system tracks the performance of service-providing subcontractors, enabling the cost and delivery of these services to appear transparent to the customer. It helps to automate verification of the third-party invoice against a service agreement, to determine geographic service availability information, and to establish various types of customer and third-party relationships.

ContractTEAM is sold per concurrent user. An implementation for 10 users on a single server costs approximately \$50,000, depending on the configuration. ContractTEAM was scheduled to ship before year end on all supported ProTEAM platforms, including HP-UX workstations.

### Help Desk

Scopus Technology has announced ProTEAM for the Help Desk, a combination of ProTEAM modules designed to meet the needs of large-scale internal help desk operations. Three new modules, NetTEAM, AssetTEAM, and TeleTEAM, have been added. The offering also includes the SupportTEAM 3.5 call tracking application.

AssetTEAM allows the help desk to collect, store, and easily retrieve information about each user's installed product. Using local agents as an interface between network and systems management software and the ProTEAM

# Create CD-ROM Discs on Your Desktop

The first complete turn-key CD-Recordable (CD-R) solution for Unix allows you to create inexpensive CD-ROM discs for data archive or distribution.

Includes premastering software, an intelligent controller and a CD recordable unit. Supports all major Unix platforms including HP 9000, Sun, IBM RS/6000, Silicon Graphics, Digital and others.



CONCORDE  
TECHNOLOGIES



For more information, call Concorde Technologies, Inc. at **(800) 359-0282**.

CIRCLE 53 ON READER SERVICE CARD

## Ever want to get Lew Platt's attention? *We can.*



**interex**

*Shared Knowledge.  
Shared Power.*

**Nobody gets HP's attention like Interex – the International Association of Hewlett-Packard Computing Professionals.**

We make it happen through our size – over 7,500 strong-minded, well-organized members dedicated to representing the interests of HP customers and users worldwide. And we make it happen through our unique relationship with HP—one based on a mutual credibility and respect that's grown over the past two decades.

We've been able to influence HP on issues from product support to customer relations. And our members are responsible for hundreds of

upgrades and enhancements to HP hardware and software.

With Interex, you'll find another kind of strength in numbers...the number of people who are there to share ideas and offer solutions whenever you need them.

Add it all up, and you'll see why Interex has long been the industry's most effective voice for HP customers and users.

**Join Interex today, and tap into the power that comes from people banding together to get what they need.**

**The International Association of Hewlett-Packard Computing Professionals**

Promoting Information Exchange via:  
Contributed Software,  
Technical Publications,  
Advocacy Forums,  
Conferences, and  
Regional & Special Interest User Groups

**For membership information, call, fax, or e-mail Interex.**

**Tel:** 800.468.3739 or 408.747.0227 **Fax:** 408.747.0947 **E-mail:** [membership@interex.org](mailto:membership@interex.org)



## Visual Tool

Visix Software Inc. has announced the Galaxy Visual Builder Integration Kit, which enables developers to customize and extend the Galaxy Application Environment. Galaxy is a cross-platform development environment designed for creating scalable, mission-critical applications that are graphical and distributed. The Visual Builder Integration (VBI) Kit is the first Galaxy add-on product offered by Visix.

The VBI Kit is targeted at developers who modify, extend, or build new Galaxy objects, allowing them to create specialized object editors that can be tightly integrated into the Galaxy Visual Resource Builder. The VBI Kit can be used to tailor the Galaxy visual tools.

Developers can create and integrate specialized visual editors into the Galaxy Visual Resource Builder, allowing the developers to work with custom and special-purpose objects without leaving the Galaxy visual programming environment. They can also modify standard Galaxy editors to operate on extended Galaxy objects within the Visual Resource builder. They can replace Galaxy visual editors tailored to corporate objects or modify the functions of standard Galaxy visual editors to ensure that objects are used consistently across development groups.

The VBI Kit will be available directly from Visix and is priced at \$4,995. Galaxy is available for UNIX (including HP-UX), Microsoft Windows, Windows NT, OS/2, and Open VMS. The C version is priced at \$9,600 per developer seat, with no run-time fees. Galaxy/C++ is priced at \$12,100 per developer seat, with no run-time fees.

Contact Visix Software Inc., 11440 Commerce Park Drive, Reston, Virginia 22091, phone: (703) 758-8230 or (800) 832-8668, fax: (703) 758-0233.

database, NetTEAM accepts and screens network event information from SNMP management products such as HP OpenView, IBM NetView AIX, and Sun NetManagement. TeleTEAM is designed to support both inbound and outbound telephone services (e.g., ANI and DNIS) and systems (e.g., PBXs, ACDs, IVRs, and predictive dialers).

Help Desk users have the ability to generate and track a series of subtasks associated with a call. All ProTEAM modules also leverage a knowledge-based system and use keyword searches, Boolean logic, and relevance ranking.

The RemoteTEAM module enables users in a global operation to log inquiries and determine their status 24 hours a day, 7 days a week, with no human intervention.

AssetTEAM, NetTEAM, TeleTEAM, SupportTEAM, and RemoteTEAM are

priced separately and are sold on a per concurrent user basis. An implementation for 10 users on a single server costs approximately \$50,000, depending on the configuration.

Contact Scopus, 1900 Powell Street, Emeryville, California 94608, phone: (510) 428-0500, fax: (510) 428-1027, e-mail: [cpadnos@scopus.com](mailto:cpadnos@scopus.com).

## VLDB Consultancy

Former Oracle Consulting principals James W. Kao, Mark Hwang, and Alex Kim have left Oracle Corporation to form a consultancy to help companies with very large databases, or VLDB (50 GB or more), move from mainframe to open systems environments. The company has also established strategic relationships with HP Professional Services and Sun Integration Services to work jointly on rightsizing projects.

The RightSizing Group architects have 50 years of combined UNIX experience, including 25 years of combined Oracle and other RDBMS experience. Past engagements include Wells Fargo Bank, Mervyn's, Duke Power, Colgate-Palmolive, CitiCorp, VLSI Technology, Internal Revenue Service, SunSoft, and Fidelity Investments. More than 90 percent of past engagements involved databases of more than 50 GB.

The RightSizing Group offers start-to-finish information systems consulting that takes businesses from planning and system design to implementation. Value-added services include project management advisory services, enterprise information system reengineering, an architecture roadmap program, capacity sizing and stress testing, open systems implementation assistance, backup and recovery strategy, legacy data extraction, and database and system administration services and apprenticeship.

Contact the RightSizing Group, 3130 La Selva, Suite 303, San Mateo, California 94403, phone: (415) 525-3700, fax: (415) 525-3707, e-mail: [info@rightsizing.com](mailto:info@rightsizing.com).

## Software Analysis

ASTA, Inc. has announced The Safe C Runtime Analyzer, a new automated software analysis and test system designed to improve the quality and performance of C programs. The analyzer is used by software development and test organizations to detect run-time errors, identify test coverage and performance bottlenecks, and understand program control flow. Safe C provides software developers the ability to thoroughly analyze and test software programs during the development process.

It quickly identifies difficult-to-detect

OUR 15th YEAR

# QUALITY HP WORKSTATIONS - WITHOUT THE HP PRICE

## RENT · LEASE · BUY

Immediate Delivery On Most Items

- 700 SERIES: Models 710, 715/50, 715/75, 735, 735/125, 712/60, 712/80, 745i
- X-STATIONS: ENVIZEX, C270X
- All 300, 400T and 400E Series
- Memory, Features & Disc Upgrades for all Workstations
- CPU Upgrades: 715/50, 715/75, 735, 735/125, 425, 380, 360

*More Than 1500 Satisfied Customers  
Throughout The USA and Worldwide*

For technical info, specs or pricing  
call Mordy or Carol



**C.S.U. Industries, Inc.**

207 Rockaway Turnpike, Lawrence, NY 11559  
(516) 239-4310 FAX (516) 239-8374

run-time errors such as memory leaks, dangling and uninitialized pointers, static and dynamic array boundary errors, stray pointers and out-of-bounds indices, arithmetic overflow and division by zero, and mismatches of formal and actual parameters in function calls. Error messages are automatically reported with clear and concise explanations of the problem and the source code line number where the deficiency arose.

Safe C also indicates the execution frequency for each function and statement in the program and identifies statements that have not been executed. Dynamic tracing provides developers the ability to view the behavior of their programs during execution by displaying a complete execution history, including function calls and assignments to variables.

Safe C is available on all popular UNIX and NT platforms. License prices start at \$1,200.

Contact ASTA, Inc., 1 Chestnut Street, Suites 205/206, Nashua, New Hampshire 03060, phone: (800) 350-2782 or (603) 889-2230, fax: (603) 881-3740.

### Job Accounting

UniSolutions Associates has announced Version 2.2 of UNISOL JobAcct, which now provides complete system monitoring, resource accounting, and billing solutions. The system performance monitoring option collects and summarizes data in graphical and tabular form for viewing on ASCII terminals, X-window system displays, and for output on laser printers.

Wildcards may be used when configuring user project files. The disk accounting subsystem can ignore NFS-mounted directories or perform accounting only for local file systems.

The system performance monitoring

CIRCLE 140 ON READER SERVICE CARD



### LAN Jukebox

Concorde Technologies, Inc. has announced the QuickConnect Model 20 Optical LAN Jukebox, a complete direct-network-attachable 20-GB optical storage solution that offers easy-to-use online archival storage. The new jukebox connects easily at any place on the network. The product is for UNIX system-based network file system (NFS) environments, such as networks of HP 9000s.

The QuickConnect Model 20 typically takes less than one hour to install and does not affect network operation during the process, the company notes. All installation hardware and software, including a 340-MB magnetic hard disk, direct-LAN attachment hardware, and jukebox-management software, are built into the optical jukebox unit.

The QuickConnect Model 20 Optical LAN Jukebox includes several data management features specifically developed for efficient network operation: data directories reside on the built-in hard disk for enhanced performance; the hard-disk cache stores frequently used files, making requests fast and efficient; and additional storage capacity looks like one big disk to the network. The jukebox is manageable from any terminal on the LAN via Telnet. It can be accessed and managed from any client using NFS, from UNIX workstations and servers to PCs, Macintosh computers, or mainframes.

The Concorde Technologies QuickConnect Model 20 Optical LAN Jukebox for NFS is \$12,500 and is immediately available.

Contact Concorde Technologies, 6370 Lusk Blvd., Suite F100, San Diego, California 92121, phone: (619) 458-0702, fax: (619) 458-0722.

option monitors system activity and collects system performance data for summary in daily reports. Data may be analyzed on-screen or printed. All system performance data may be kept online for months or archived to tape. UNISOL JobAcct can perform actual cost accounting and chargeback for each user, group, project, and cost center, or proportional chargeback on a project/department level.

It supports variable rate structures and accounting periods and provides flexible report formats and direct billing charge statements. Users may allocate charges to multiple projects during a login session and can review their previous charges from online summary reports. Reports can be generated for a single host or for multiple machines on the network.

License fees for the base accounting package range from \$1,595 to \$6,000 for master copies and \$300 to \$1,500 for collector copies. The performance monitoring module license ranges from \$195 to \$895. UNISOL JobAcct is available immediately on HP-UX 9.03 and other UNIX variants.


Contact UniSolutions Associates, 2103 Mathews Avenue, Suite 1, Redondo Beach, California 90278, phone: (310) 542-0068, fax: (310) 370-4024.

### Client-Server Warehousing

Cambar Software has announced the Client-Server Warehousing (CSW) software system on the HP 9000 platform.

CSW is designed to fully automate all major warehouse functions, including receiving and putting away, order

### Concorde Technologies, Inc. QuickConnect Model 20

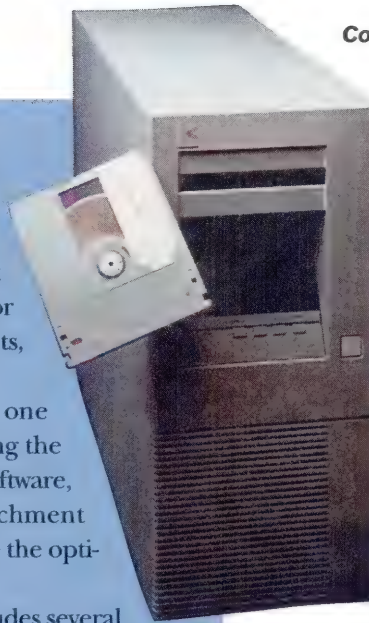

pooling, picking and shipping, inventory control, cycle counting, physical inventory, bin replenishment, and report generation. It features graphical screens, RF/barcode scanning, real-time information delivery, and 24-hour operation support that makes it possible for the warehouse to keep functioning even if

the host distribution system goes down.

Price ranges from \$150,000 to \$300,000, depending on configuration and customization.

Contact Cambar Software, 4975 LaCross Road, Charleston, South Carolina 29406-6524, phone: (803) 747-4900, fax: (803) 554-2970.

### CAD Geometry Tool

Imageware, Inc. has announced Version 4.0 of Surfacer, which provides an icon-based interface with powerful tools for point processing, geometry creation, and verification. Surfacer allows engineers and designers to quickly and accurately recreate or verify complex CAD geometry from physical parts, models, and prototypes. It features direct inputs of digitized points from CMMs, laser, vision, and touch probe digitizing systems.

Curve and surface editing may now be accomplished by directly manipulating the geometry. Surface editing now includes real-time feedback. Compressed files can be imported and exported directly from Surfacer, without using additional filters.

Online help and an option for displaying surfaces as a curve mesh have been added. The boundaries and internal mesh of the surface are now displayed at "near pixel" level accuracy. Surfacer

# Sign up NOW for Fall 1995 Listings

## *hp-ux/resource directory*

The *hp-ux/resource directory* is a complete resource guide for HP-UX users seeking answers. This is one of the industry's most extensive reference guides for HP-UX products, services, and vendors. It will be devoted entirely to HP 9000 users operating in multi-user, workstation, and multi-system UNIX environments. This bi-annual directory, published each year in March and September, is a separate publication mailed out with *hp-ux/usr* magazine, the only HP-specific publication on the market.

Each company is listed by category, with each listing including company name, product, operating environment, and phone number. The cost for a full year listing in the *hp-ux/resource directory* is \$475. Discounts are available for current advertisers in *hp-ux/usr*, *Interact* or the *Vendor Service Source Directory*. Advertisers who run more than one listing per issue also receive a discount. There is a 75-word maximum per listing, with a charge of \$1.00 per word over the maximum.

The Fall 1995 *hp-ux/resource directory* will be published in **September** with **all listings due by May 5, 1995**. For further information contact Liana Fisher at the Interex Advertising Department 408.747.0227 or 800.468.3739. Fax: 408.747.0947. Written inquiries should be addressed: Liana Fisher, Interex, 1192 Borregas Avenue, P.O. Box 3439, Sunnyvale, California 94088-3439 U.S.A.

### PRODUCT CATEGORIES

Accounting	Government	Pointing Devices
Accounting Software	Graphics	Pre- and Post-Print Automation
Application Development Software	Hardware	Print Management
Application Development Tools/4GL	Hardware/Mass Storage	Process Control Software
Application Software Design	Hardware Subsystems	Project Management
Backup Hardware	Help Desk Management	Protocol Converters/Interfaces-Hardware
Backup Software	Hierarchical Storage Management	Publications
Bar Code Data Collection Systems	Human Resources and Personnel Systems	Purchasing
Batch Job Management	Image Processing	Quality Assurance Tools
Business Software	Image Storage and Retrieval Management	Records Management
CAD Software/Hardware	Industrial Terminals	Remote Control Software
Case Tools	Instrument Control	Rentals
Change Control	Integration Tools	Report Viewing, Printing, and Distribution
Change Management Tools	I/O Boards	Report Writers
Civil Engineering	Job Scheduling and Workload Management	Resource Management
Client-Server	Laser Printers	Sales and Marketing
Communications	Laser Printing Software	Scheduling
Communications Servers	Local Area Network (LAN)	Scheduling/Task Management
Communications Software	Mail Management and Marketing	Security
Consulting	Maintenance	SNA Communications
Consulting/Systems Integration	Manufacturing	Software
Customer Support/Help Desk Systems	Manufacturing Software	Software Development-Parametric
Database Management Systems	Mass Storage	Software Development Tools
Database Management Tools	Math Libraries	Software Maintenance and Testing
Data Center Management	Memory	Spoolers
Data Warehousing	Memory Upgrades	Statistics
Decision Support Systems	Migration Tools	Statistics/Data Analysis
Depot Repair/On-Site Management	Multimedia	System Integration
Desktop Publishing	Municipal Software	System Management
Disaster Recovery	Network Backup Software	Tape Backup Products
Disk Drives	Network Integration	Tape Storage
Distribution Software	Network Management	Tape Storage/Data Interchange
Document Management	Networking	Technical Documentation/Cross
Electronic Data Interchange (EDI)	Networking Systems	Referencing
Electronic Form Printing	Operating System	Telephone Management
Electronic Mail and Directory Integration	Payroll	Terminal Emulation
End-User Computing	PC Integration	Text Editors
Executive Information Systems	Performance	Time and Billing
Fax Automation	Performance Software	Time Reporting Terminals
Financial	Personal Information Manager	Training
Font Creation and Manipulation	Personnel Management	User Groups
Fourth Generation Language		Utilities
Full-Screen Editor		Workstations

**Other categories may be created as needed.**


**See reverse side for listing form**



# hp-ux/resource directory

## FALL 1995 Listing Form

The Interex *hp-ux/resource directory* is published two times a year and mailed with *hp-ux/usr* magazine. The cost for a single listing in two issues is \$475. Each additional listing is \$375. Discounts are available for current advertisers in *hp-ux/usr*, *Interact*, or the *Vendor Service Source Directory*. For additional listings, please duplicate this form. The maximum number of words per listing is 75, excluding company name, address, product name, and operating environment. There is a charge of \$1.00 per additional word for each listing. The fall 1995 *hp-ux/resource directory* will be published in **September** with **all listings due by May 5, 1995**.



Spring 1995 *hp-ux/resource directory*

**Company logos** can be placed with listings. The cost is \$100, with discounts available for multiple listings. Maximum size is 3/4 inches high by 1-1/2 inches wide.



**Product photos** can now be placed with listings. The cost is \$100 per photo, with discounts available for multiple listings. There is a \$75 charge for changing photos between issues. Photos must be submitted in either 35mm slides, 4x5 transparencies, or up to 4x6 **GLOSSY** prints (black and white or color). The actual size the photo will appear in the publication is 2 3/16" wide and the height will be determined by the orientation of the original photo (horizontal or vertical).

(Please fill in all information completely—**ONLY** typewritten or clearly printed copy will be accepted)

Category \_\_\_\_\_

Product Name \_\_\_\_\_

Operating Environment \_\_\_\_\_

**Product Description** (MAXIMUM 75 WORDS) There is a \$1.00 per word charge for all listings over 75 words. If you need more space, please type or clearly print copy on a separate sheet and attach to this form.

Please return completed form to:

**Interex** ■ 1192 Borregas Avenue, P.O. Box 3439, Sunnyvale, CA 94088-3439, U.S.A.

**Phone** (408) 747-0227 or (800) 468-3739 ■ **Fax** (408) 747-0947

Company Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone Number \_\_\_\_\_ Fax Number \_\_\_\_\_

Authorization \_\_\_\_\_

Signature/Date \_\_\_\_\_

Signature/Date \_\_\_\_\_

**Terms & Conditions of Sale:** All ads are under the terms Net 30 Days. Any balance over 30 days old will be charged 1.5% per month. Interex reserves the right to refuse advertisement in any of its publications to any delinquent advertisers.

**Cancellations Clause:** All cancellations must be made by the listing due date and must be followed in writing within 5 working days.

PAYMENT OR PURCHASE ORDER MUST ACCOMPANY ALL ORDERS

also features IGES, VDA-FS, DXF, OBJ, STL, and CADD5 read/write capabilities; direct interfaces to over 25 digitizers, CMMs, and data formats; a macro language for writing scripts; and the Open Architecture Kit for creating customized applications.

An optional module for producing and manipulating polygonized shapes that can be used for rapid prototyping, the Surfacar Rapid Prototyping Module (RPM), also allows users to see their data files and verify the integrity of the model while checking for error conditions such as open volumes and redundant, degenerate, overlapping, and intersecting polygons.

Contact Imageware, 313 N. First Street, Ann Arbor, Michigan 48103, phone: (313) 994-7300.

## New from HP

### CD Now Program

HP has announced it will migrate to the CD-ROM medium for software delivery to HP 9000 customers during the next three years. This program, CD Now, is part of a company-wide initiative to improve customer access to HP products and services. The three-year plan is designed to give HP workstation and business server customers and HP Channel Partners time to plan a smooth transition to CD-ROM. Currently, HP customers can order the HP-UX operating system and other HP software on CD-ROM or digital audiotape (DAT). After the program is complete, HP will offer DAT only on special request.

HP 9000 customers can purchase a CD set containing nearly all HP software, including HP-UX, CASE tools,


and networking, system-administration, and database software for less than the price of HP-UX alone on DAT. When media-update costs are factored in with initial purchase prices, HP's CD-ROM-based software can save between \$1,000 to \$2,000 per system over three years.

Effective November 1, HP is reducing all HP 9000 CD-ROM media prices. For example, the CD-ROM media price for HP-UX 9.04 and associated software products for the Series 800 will be reduced from \$630 to \$520, and the price for Series 700 HP-UX 9.0 documentation on CD-ROM will be reduced

from \$835 to \$695. HP also is reducing prices of CD-ROM drives to \$655 (initial drives) and \$875 (external drives) and will increase the prices of selected DAT media and paper documentation 10 percent to 30 percent. ■

*Attention vendors: New product announcements should be sent to New Products Editor, hp-ux/usr magazine, Interex, P.O. Box 3439, Sunnyvale, California 94088-3439, USA.*

*Deadline for submission is 2 1/2 months prior to publication.*

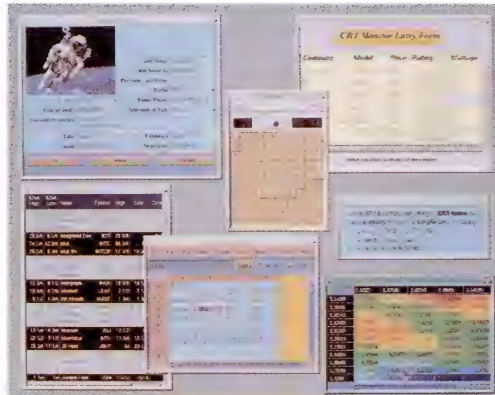

**KL Group Inc. XRT/table Version 2.0**

### Table Widget

KL Group Inc. has announced the release of XRT/table Version 2.0, a multipurpose widget that enables Motif developers to build interactive tables into their applications. The new version enhances developer productivity by enabling developers to quickly and cost-effectively create data-entry forms and editable scrolled lists. Also, for the first time, XRT/table is available for OpenVMS.

XRT/table Version 2.0 is available now. A single development license is \$1,495; licensing for a network is \$5,995. There are no run-time, royalty, or distribution fees.

XRT/table allows developers and end users to display and manipulate tabular data in OSF/Motif applications. New features of XRT/table include cells that contain other widgets and/or pixmap images for easy placement of buttons, menus, logos, and photos within a cell; cell spanning or joining neighboring cells to create the impression of a single large cell; a new widget, XRT/label, which supports text rotation and PostScript printing and can be used to display titles on any side of a table; and support for Motif 1.2 drag and drop, which allows end users to cut/copy cells and/or ranges of cells from one table to another.

XRT/table can be used in conjunction with other KL Group products, including XRT/graph and XRT/3d. All XRT products are based on the open object-oriented architecture used by the Xt Intrinsics and OSF/Motif. XRT products also support UIL and C++ interfaces and can be easily integrated into popular GUI building tools.

Contact KL Group, 260 King Street East, Third Floor, Toronto, Ontario, Canada M5A 1K3, phone: (416) 594-1026 or (800) 663-4723, fax: (416) 594-1919, e-mail: [info@klg.com](mailto:info@klg.com).



# Membership Levels and Service Packages

The International  
Association of  
Hewlett-Packard  
Computing  
Professionals

## Membership Levels

■ **associate level** includes the following services/benefits:

- **Subscription to either:**  
*hp•ux/usr* magazine - includes companion Product Directory  
*Interact* magazine - includes companion Product Directory
- Member rates for Interex Conferences
- Read-only access to Interex Online library
- Membership in your local Regional User Group (RUG) at RUG membership rate

■ **contributing level** includes the following services/benefits:

- **Subscription to BOTH:**  
*hp•ux/usr* magazine - includes companion Product Directory  
*Interact* magazine - includes companion Product Directory
- Subscription to *InterexPress*, monthly news publication
- E-Mail account through Interex (includes read-only access to Interex Online library)
- Access to Special Interest Groups (SIGs)
- Member rates for Interex Conferences
- Membership in your Regional User Group (RUG) at RUG membership rate
- Voting Privileges for Board Elections and Advocacy Surveys  
(i.e., system improvement surveys)

## Service Packages

■ **online service package** includes ALL the benefits of Contributing Level plus:

- **Software Access**—unlimited downloads from entire library of HP-UX, MPE, and RTE programs (containing over 4,800 programs). Includes one free tape of current Interex Annual Release in the operating system of your choice. Custom tapes from software library are also available.
- **Information Access**—full text search and downloading capabilities for all Interex publications including: *hp-ux/usr*, *Interact*, Vendor Resource Directories, product news and announcements, and Conference Proceedings abstracts.
- **Member Access**—member directory. Find members with similar interests. Plus access to the *Who's Who* guide of Interex staff, volunteers, and HP liaisons.

*Online services are continually upgraded and modified; services are subject to change without notice.*

# I'd Like to Join Interex

## Order Form

Choose one of the following

### ■ membership levels & service packages

- ☐ Associate Level, \$49.50\*
- ☐ Contributing Level, \$115.00\*
- ☐ Contributing Level Plus Online Package  
\$595.00\*

All membership and service packages are based on an annual fee.

Package subscribers, please choose the following:

### ■ preferred software format and operating system for the annual tape release

- ☐ 1600 BPI Magnetic Tape
- ☐ 6250 Magnetic Tape
- ☐ Linus Cartridge Tape (CS-80)
- ☐ DAT 4mm

(Check one of the following)

- ☐ HP-UX ☐ MPE/iX ☐ MPE V ☐ RTE

**Please read and sign the following disclaimer:** I am applying for services with Interex. I understand that no funds will be returned after any Contributed Software Library (CSL) tapes/disks have been shipped or downloaded from Interex. I agree not to distribute software to any unauthorized users or use software received through Interex on more than one system at a time. I understand that this agreement stays in force even after my services expire or are terminated.

Contact the Membership Department for pricing of the Right-to-Copy License for multiple machine usage

Signature \_\_\_\_\_

Date \_\_\_\_/\_\_\_\_/\_\_\_\_

### ■ member directory

Please include me in the member directory.

- ☐ Yes ☐ No Please initial: \_\_\_\_\_

### ■ service agreement

If you relocate, should services transfer with you?

- ☐ Yes ☐ No Please initial: \_\_\_\_\_

### ■ mailing list

Would you like to receive mailings about other computer-related vendors' products and services? ☐ Yes ☐ No

### ■ mailing address

(attach business card here)

name

job title

company

address

city/state/zip

country

telephone/extension

fax

e-mail

### ■ billing address (if different from mailing address)

name

company

address

city/state/zip

country

### ■ payment options

- ☐ Bill me ☐ Check enclosed, payable to Interex
- ☐ Purchase order enclosed, PO# \_\_\_\_\_  
(purchase order accepted for invoicing purposes only)
- ☐ Please charge my: ☐ Visa ☐ MasterCard ☐ AmEx

credit card number / expiration date

signature

Total payment enclosed \$ \_\_\_\_\_

Foreign currency accepted BUT payment must be equivalent of U.S. currency. Each publication has an annual subscription value of \$49.50.

**NOTE:** Services do not begin until payment is received.

\*Canada & Mexico add \$25 and all other countries outside the U.S. add \$50 for additional postage.

### ■ send form and payment to:

Interex, P.O. Box 3439,  
Sunnyvale, CA 94088-3439, USA;  
**fax** 408 747-0947  
**phone:** 800.INTEREX, 408.747.0227



# Advertiser's Index

Please call or fill out adjacent card for further product information.

READER SERVICE NUMBER	ADVERTISER	PAGE #
59	API International.....	21
	(800) 5-API-USA	
45	Camintonn Corp. ....	C-2
	(800) 368-4726	
154	Co Comp, Inc.....	59
	(800) 873-0247/Fax: (303) 482-2913	
150	Computer Marketing International.....	39
	(800) 497-4264/Fax: (508) 689-2031	
53	Concorde Technologies .....	87
	(800) 359-0282/Fax: (619) 458-0722	
140	C.S.U. Industries, Inc. ....	89
	(516) 239-4310/Fax: (516) 239-8374	
35	Db-TECH.....	47
	(800) 234-4500	
43	Dallastone .....	43
	(603) 647-8168	
34,164	Design 3000 Plus, Inc. ....	63, C-3
	(503) 585-0512/ Fax: (503) 585-1706	
121	Diamond Optimum Systems, Inc. ....	65
	(818) 224-2010 or (800) 362-8271	
24	Digital Controls.....	39
	(800) 274-1627	
105	I/O Data Systems, Inc.....	69
	(216) 835-2211/Fax: (216) 835-0220	
96	IEM, Inc. ....	9
	(800) 321-4671/ Fax: (303) 221-1909	
136	Innovus Inc. ....	7
	(905) 529-8117/Fax: (905) 572-9586	
78	ITAC Systems, Inc. - Mouse-Trak .....	5
	(214) 494-3073/Fax: (214) 494-4159	
114	International User Conference .....	73
	011 49 711 976 7114, Fax: 011 49 711 976 7116	
146	Interworks '95.....	19
	(508) 436-4460	
22	KL Group.....	71
	(800) 663-4723	

READER SERVICE NUMBER	ADVERTISER	PAGE #
159	Maxtech .....	37
	(404) 428-5000/Fax: (404) 428-5009	
170	MDL .....	15
	(800) 800-3766	
20	Monterey Bay Communications .....	1
	(408) 429-6144/Fax: (408) 429-1918	
107	Newport Digital Corporation .....	81
	(800) 383-3642/Fax: (714) 730-3951	
26	ORBIT Software .....	83
	(800) 6-Online or (510) 837-4143	
95	Pericom, Inc. ....	77
	(609) 895-0404/Fax: (609) 895-0408	
44	Platinum Technology.....	13
	(800) 401-7528	
102	Quest Software.....	31
	(714) 720-1434	
152	RAC Consulting.....	67
	(206) 357-9572/Fax: (206) 352-8453	
62	Robelle Consulting Ltd.....	85
	(604) 582-1700/Fax: (604) 582-1799	
33	Software Licensing Corp. ....	27
	(702) 832-0881	
143	Technical & Scientific Application.....	57
	(800) 422-4872/Fax: (713) 935-1555	
49	Ted Dasher & Associates.....	27
	(800) 638-4833/Fax: (205) 591-1108	
89	Telamon .....	85
	(916) 622-0630/Fax: (916) 622-0738	
21	Telenomics .....	29
	(800) 328-1177	
40	VESOFT, Inc.....	69
	(310) 282-0420/ Fax: (310) 785-9566	
39	Workstations International Inc. ....	21
	(612) 449-9000	
	Walker Richer & Quinn, Inc.....	Back Cover
	(800)92-NETWORK	



# STAY ON COURSE

## WHILE WE DO THE MONITORING

Tired of checking in on weekends or nights to verify that your data center is running as planned, when you could be spending this time enjoying one of your hobbies. With JMS to schedule and control your batch jobs, and with Callback to monitor your system looking for critical conditions, you can better enjoy your free time knowing that if a problem does occur, you will be notified by phone or pager.

### CALLBACK SYSTEM DOWN DETECTOR AND JOB NOTIFICATION SYSTEM

Voice notification for:

- System hangs
- Physical conditions
- Job aborts
- Adverse temperature
- Console messages
- Power loss
- Printer status
- User requests
- Logon security
- Reply pending
- Special job events
- Spoolfile scanning

### JMS JOB MANAGEMENT SYSTEM

Automated control for the scheduling and execution of batch jobs with very flexible scheduling capabilities and dependencies. Easy to use, no command language to learn and no jcl changes. JMS is a multiple-CPU system that allows jobs to have dependencies across the network. Ad hoc streamed jobs may be incorporated to allow complete batch job control.


**Leaders in tools for the "Lights Out Environment". Call us today for a free 30 day demo. MPE/XL or HP-UX.**

**Corporate Headquarters**  
1214 Hawthorne Ave. NE  
P.O. Box 13086  
Salem, OR 97309  
Phone: (503) 585-0512  
FAX: (503) 585-1706

**International Sales Office**  
System Software Intl.  
4-6 St. Andrews Rd.  
Droitwich, Worcs.,  
ENGLAND WR9 8DN  
Phone: 44 905 79 4646  
FAX: 44 905 79 4505





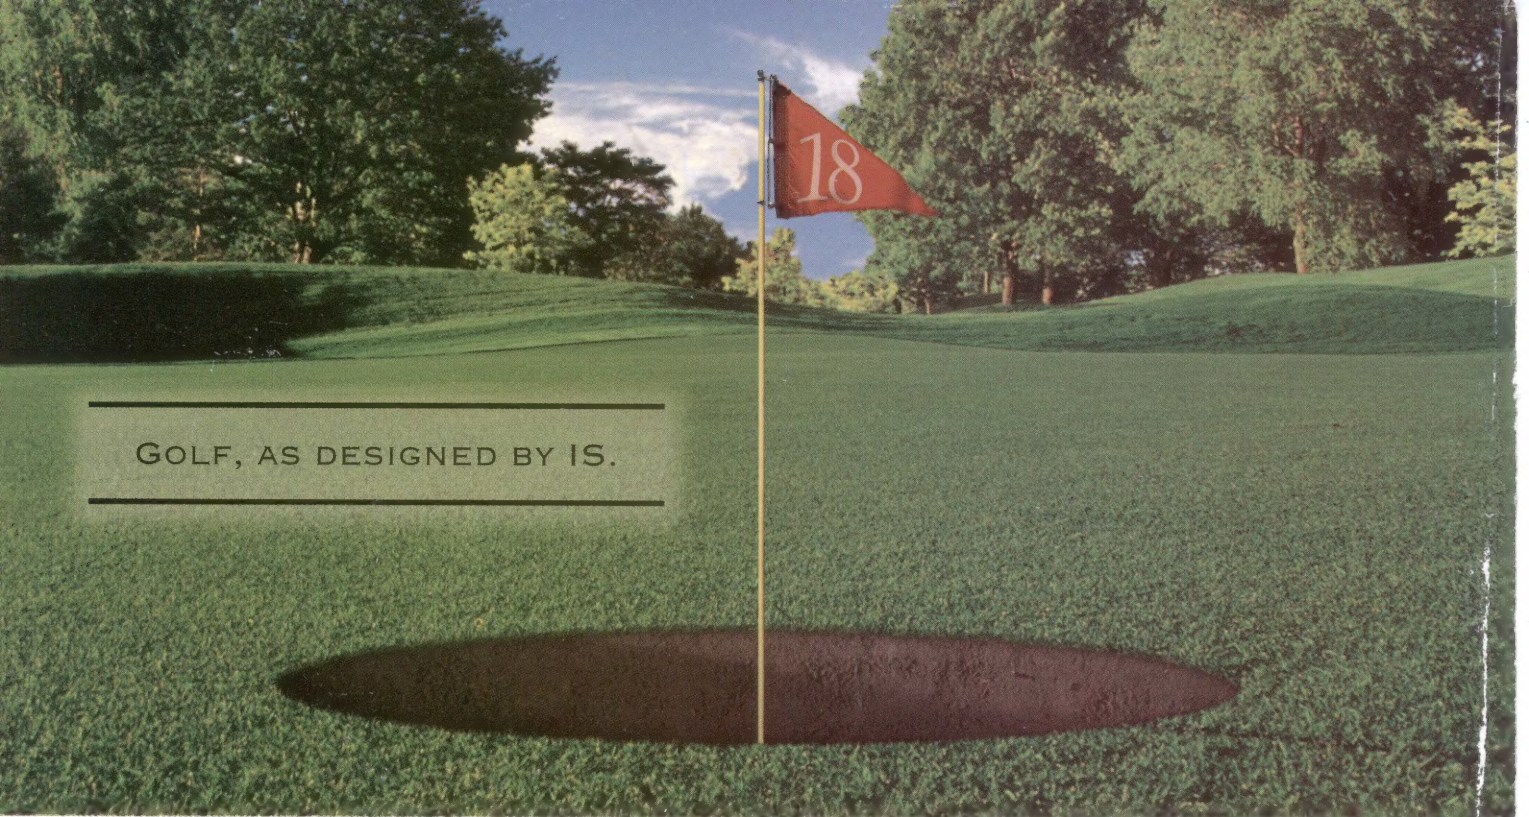


GOLF, AS DESIGNED BY IS.

---

## TCP/IP CONNECTIVITY, AS DESIGNED BY IS.

---



If you designed the course that connects your network, chances are you'd stack the odds in your favor. You'd start with the only TCP/IP stack developed specifically for the rigorous needs of corporate networks—the one rated #1 by *InfoWorld* magazine. Then you'd insist on 100% Windows™ Sockets compliance to keep you out of any traps.

### REFLECTION SUITE FOR TCP

- ▲ COMMUNICATIONS: TCP/IP, UDP, LAT, IPX, SLIP, AND CSLIP.
- ▲ ARCHITECTURE: COOPERATIVE VXD/DLL FOR PERFORMANCE AND RELIABILITY.
- ▲ NETWORK MANAGEMENT FEATURES: SNMP MIB II, EVENT LOG WITH FILTERS, NETWORK STATISTICS WITH VIEWER, AND CONFIGURATION AT A GLANCE.
- ▲ TERMINAL FEATURES: VT320 (TELNET) WITH COMMAND LANGUAGE AND SCRIPT RECORDER, KEYBOARD MAPPING, AND INTERNATIONAL CHARACTER SETS.
- ▲ APPLICATIONS: FTP CLIENT WITH DRAG-AND-DROP FILE TRANSFER, FTP SERVER WITH EXTENSIVE SECURITY OPTIONS, LPR/LPD, AND GRAPHICAL PING AND FINGER.
- ▲ OPEN CONNECTIVITY: 100% WINSOCKET COMPLIANCE PROVIDING ACCESS TO FREEWARE/SHAREWARE INTERNET APPLICATIONS, AND COMPLEMENTARY WRQ APPLICATIONS.
- ▲ MOBILE/WIRELESS COMPUTING: DYNAMIC LINK RECOVERY, PROGRESSIVE ACK POLICY, AND SYNCHRONIZED RETRANSMISSION TIMING.
- ▲ TECHNICAL SUPPORT: FREE PHONE SUPPORT, BBS, AND TECH NOTES BY FAX.

Next, you'd include award-winning VT320 terminal emulation, FTP client and server, and an extensive set of network monitoring and diagnostic tools. All with one simple installation, and optimized for mobile/wireless computing.

If that's how you'd do it, you'll love the way we've done it. Give it a shot. Call for your free evaluation copy of Reflection® Suite for TCP today.

800.926.3896

 **Reflection**  
CONNECTIVITY FOR A CHANGING WORLD.